



FAUCETS | SINKS | GAS CONNECTORS | CASTERS



Where passion meets precision.™

Krowne is now celebrating our **74th anniversary** as a family-owned company manufacturing in the U.S.A! Our products range from custom underbar equipment and refrigeration to durable high quality faucets and pre-rinses.

Generations
Krowne has been family-owned and manufacturing in the U.S.A. for three generations.

Years
With over 70 years of experience,
Krowne is an industry leader in
design and innovation.

Thousand sq ft.

Krowne has rapidly expanded our manufacturing and distribution facilities to over 250,000 sq ft in the USA.

PURCHASE

orders@krowne.com

CONTACT

≥ sales@krowne.com

800.631.0442

FOLLOW

f y in @krowne

© d @krownemetal

VISIT

100 Haul Road Wayne, NJ 07470 krowne.com

CONTENTS

Diamond Series Plumbing	Pre-Rinse Units & Replacement Parts	10
	Faucets & Replacement Parts	13
	Electronic Faucets	15
	Rotary Twist Waste Valves	15
Royal Series Plumbing	Pre-Rinse Units & Replacement Parts	17
	Faucets & Replacement Parts	26
	Water Line & Mounting Kits	38
	Valves & Handles	40
	Spouts	41
	Coupling Flanges & Coupling Flange Adapters	42
	Adapters & Vacuum Breakers	44
	Aerators/Outlets	45
	Lavatory Faucets	46
	Electronic Sensor Faucets & Accessories	52
Silver Series Plumbing	Faucets	59
	Replacement Parts	64
Drains	Waste Drains & Replacement Parts	66
	Sink Drains	69
	Overflow Pipes	70
Hand Sinks	16"W Hand Sinks	72
	12"W Hand Sinks	78
	9"W Space Saver Hand Sinks	81
	ADA Compliant Hand Sinks	82
	Specialty Hand Sinks	82
	Hand Sink Parts & Accessories	83
	Drop-In Sinks	85
	Scullery Sinks	86
	Specialty Sinks with Legs	86
	Sink & Floor Strainers	87
Gas Connectors	Complete Kit	89
	Custom Kits	89
	Stationary Gas Connectors	94
	Gas Connector Parts & Accessories	94
Specialty Products	Grease Filters	96
	HydroSift Water Filters	97
	Wok Faucets	98
	Utility Sprays	100
	Pot Fillers	101
	Hose Reels	102
	Test Strips	103
	Wobble Wedges	103
	Refrigeration Accessories	104
	Fryer Accessories	105
	Ice & Water Service Stations	106
	Drop-In Ice Bins	106
	Ice & Water Service Station Accessories	107
Casters	Adjustable Height Casters	109
	Royal Series Casters	110
	Economy Casters	117




Configure your faucet to your spec

Instant 3D Renderings • Unlimited Configurations • No Special Software Required

Includes New Features

- New user interface
- New product additions
- Mobile friendly
- Instant spec sheet generation
- Instant price generation
- Built-in savings calculator

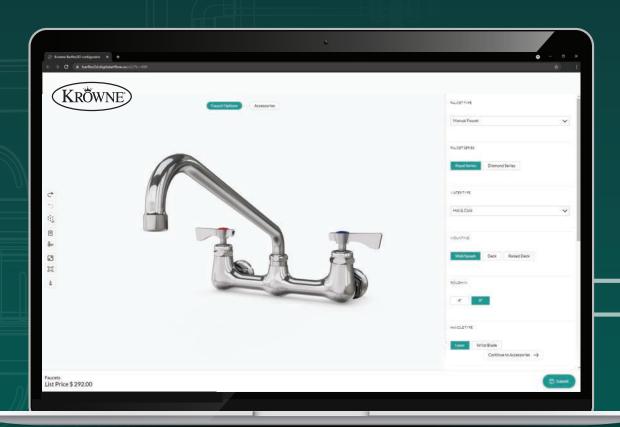

How easy is it to build your perfect faucet?





2 Choose your spout style



3 Choose your outlet style



New Product Additions

- Pre-Rinse Units
- Electronic Faucets
- Lavatory Faucets
- Pot Fillers
- Service Sink Faucets
- and much more!



Start building at FaucetFlex.com

Krowne Displays

At Krowne, our **Showroom Display Program** offers the opportunity to showcase the Krowne Plumbing line while allowing customers to interact with the actual products.

Available in multiple configurations to adapt to most counter and showroom areas, we can help spotlight the Krowne product offering for your location.

Reach out to your sales representative or sales@krowne.com today!



10

8 Snor

Display Benefits

- Free Display
- Free Display Faucets
- Free Freight
- 90 Day Billing
- Special Discount

Combo Display

Our 48" combination display offers a hybrid of slot-wall and off-the-shelf product placement.

This display is great for high-volume locations with an emphasis on quality and availability.

Suggested Items Ordered with Display

■ 17-108WL	■ 21-300L	■ 21-445L
■ 17-109WL	■ 21-308L	■ 21-192L
■ 14-812L	■ 21-309L	22-204
■ 14-8XXL	■ 21-421L	■ 10-400L
16-281	■ 21-422L	HS-2L
■ 21-129L	■ 21-423L	22-502
■ 21-139L	■ 21-424L	■ 15-3XXL
 21-1331 	21-428I	■ 15-5XXI





Freestanding Display

Freestanding Display

Our 36" freestanding display features a showroom quality slot-wall configuration showcasing some of our most popular products.

This space saving display is a great choice for small to mid-size counters, showrooms, and more!

Suggested Items Ordered with Display

■ 17-108WL	■ 21-133L	• 21-192L
■ 17-109WL	■ 21-300L	• 21-193L
■ 14-812L	■ 21-308L	22-204
■ 14-8XXL	■ 21-309L	■ 10-400L
■ 12-812L	■ 21-421L	■ 11-406L
16-281	■ 21-422L	■ HS-9L
■ 21-129L	■ 21-423L	■ HS-2L
■ 21 ₋ 139I	 21-424I 	



A LUXURY PLUMBING COLLECTION



Diamond Series Offerings:

- Wall/Deck Mount Pre-Rinses
- Wall/Deck Mount Manual Faucets
- Wall Mount Electronic Sensor Faucets
- Rotary Twist Waste Drains



DETAILS MATTER.

As a family-owned company for over 70 years, we take personal pride in the process of researching, developing and releasing innovative products to our growing industry. The launch of the Diamond Series product line brings premier performance to the kitchen while integrating unique aesthetic designs & finishes.



Industry Leading Lifetime Warranty

Cutting-edge engineering and world-class components allow us to offer an industry first lifetime warranty on all Diamond Series products.



Sleek Aesthetic with Ultra-Polish Satin Finish

Sharp contrasting lines blended with a bright satin finish creates a modern captivating appeal.



1/4 Turn High Performance Stainless Steel Ceramic Cartridge Valves with Integral Check

Engineered and rigorously tested to execute over 2 million turns at optimal performance.




Integral Smooth-Spin Swivel

Multi-spray functionality on our Diamond Series Spray Head.



All Accessories Included

High quality install kits packaged with all Diamond Series faucets and pre-rinses for simple installation.

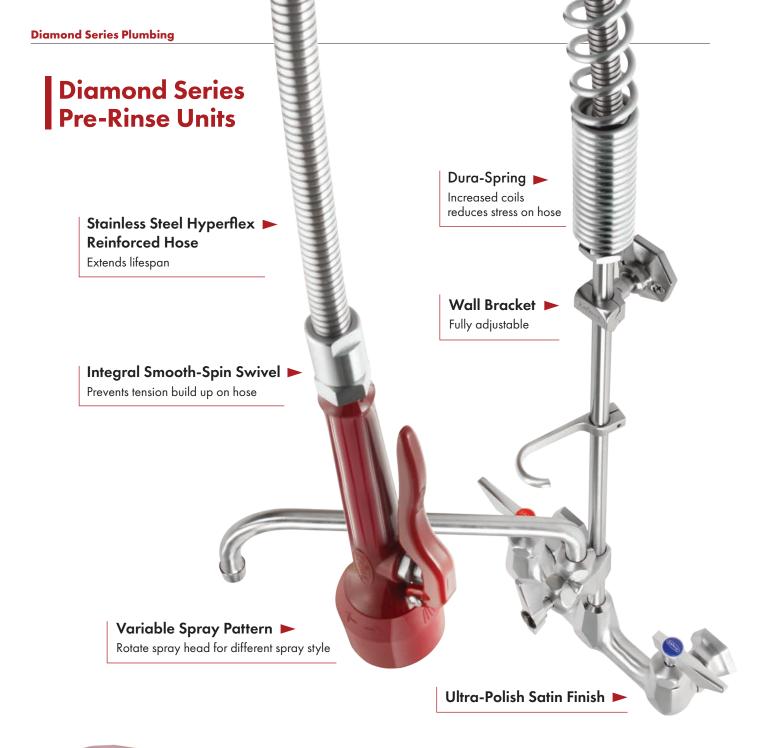



Diamond Series Pre-Rinse Units

Features apply to all Diamond Series Pre-Rinse Units

- Dual Spray Technology
- Ultra-polish satin finish on solid brass base
- ¼ Turn high performance stainless steel ceramic cartridge valves with integral check
- 1.15 GPM spray head
- Includes wall bracket
- Pre-assembled to cut installation time



8" Center Wall **Mount Pre-Rinse**

- 8" centers
- ½" NPT female inlets
- 35" high with 15" overhang
- Mounting kit & flexible water lines included

Model DX-108



8" Center Wall **Mount Pre-Rinse** with Add-On Faucet

- 8" centers
- Add-On Faucet with 12" spout
- ½" NPT female inlets
- 38" high with 15" overhang
- Mounting kit & flexible water lines included

Model DX-109



8" Center Wall **Mount Pre-Rinse** with Add-On Faucet **Less Spout**

- 8" centers
- Add-On Faucet less spout
- ½" NPT female inlets
- 38" high with 15" overhang
- Mounting kit & flexible water lines included

Model DX-109-X



Single Hole Deck **Mount Pre-Rinse**

- 1-1/8" OD x 2-1/4" shank
- Fits in 1-1/4" single hole
- 35" high with 15" overhang
- 13" water lines with 3/8" compression fittings

Model DX-202

Diamond Series Pre-Rinse Replacement Parts



No.	Model	Description
1	DX-133	44" Hose
2	DX-162	Spring
3	DX-129	1.15 GPM Spray Head
4	DX-171	Spray Head Handle with screws
5	DX-322	Button Valve
6	DX-165	Hook
7	DX-161	Spring Retainer
8	DX-160	18" Riser Pipe
8	DX-160-24	24" Riser Pipe
9	DX-137	Wall Bracket
	DX-166	Repair Kit for Spray Head (Shower Pattern)
	DX-179	Repair Kit for Spray Head (Knife Pattern)

1.15 GPM Spray Head

- Dual Spray technology featuring two spray patterns
- Shower Pattern tight, highpowered shower pattern for tough grime removal
- Knife Pattern wide, fan-like pattern for large surface area rinsing
- 360° smooth-swivel functionality
- Ergonomic handle
- Durable valve for extended longevity

Model DX-129





Add-On Faucets

- 3/8" NPT Male inlet
- 3/8" NPT Female outlet
- Turns on and off without obstruction





Diamond Series Faucets

Features apply to all Diamond Series Faucets

- Ultra-polish satin finish on solid brass base
- 1/4 turn high performance stainless steel ceramic cartridge valves w/ integral check
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handles
- Mounting kit & flexible water lines included



Single Hole **Deck Mount Faucets**

- Fits 1-1/4" single hole
- 1-1/8" OD x 2-1/4" shank
- 20" water lines with 3/8" compression fittings

Model	Spout Size
DX-601	6"W Double Bend
DX-602	8-1/2"W Double Bend
DX-625	4-1/2"W Double Bend
DX-6XX	Faucet Body (No Spout)



4" Center **Deck Mount Faucets**

• 1/2" NPS male inlets on 4" centers

Model		Spout Size	Model	Spout Size
DX-3	06	6" Swing	DX-316	16" Swing
DX-3	80	8" Swing	DX-301	6"W Double Bend
DX-3	10	10" Swing	DX-302	8-1/2"W Double Bend
DX-3	12	12" Swing	DX-325	4-1/2"W Double Bend
DX-3	14	14" Swing	DX-3XX	Faucet Body (No Spout)



■ 1/2" NPS male inlets on 4" centers

		Model	Spout Size
Model	Spout Size	DX-400	4-1/2"W Double Bend
DX-406			6"W Double Bend
DX-408	8" Swing	DX-402	8-1/2"W Double Bend
DX-410	10" Swing	DX-4XX	Faucet Body (No Spout)



• 1/2" NPS male inlets on 8" centers

Model	Spout Size	Model	Spout Size
DX-906	6" Swing	DX-916	16" Swing
DX-908	8" Swing	DX-918	18" Jointed
DX-910	10" Swing	DX-901	6"W Double Bend
DX-912	12" Swing	DX-902	8-1/2"W Double Bend
DX-914	14" Swing	DX-9XX	Faucet Body (No Spout)



■ 1/2" NPT female inlets on 8" centers

Model	Spout Size	Model	Spout Size
DX-806	6" Swing	DX-816	16" Swing
DX-808	8" Swing	DX-818	18" Jointed
DX-810	10" Swing	DX-801	6"W Double Bend
DX-812	12" Swing	DX-802	8-1/2"W Double Bend
DX-814	14" Swing	DX-8XX	Faucet Body (No Spout)

Diamond Series **Replacement Parts**

Swing Spouts

- Built for high volume
- Double o-ring construction
- Ultra-polish satin finish



Model	Spout Size
DX-420	6" Swing Spout
DX-421	8" Swing Spout
DX-422	10" Swing Spout
DX-423	12" Swing Spout

Model	Spout Size
DX-424	14" Swing Spout
DX-425	16" Swing Spout
DX-426	18" Jointed Spout

Double Bend Gooseneck Spouts

- Built for high volume
- Double o-ring construction
- Ultra-polish satin finish

Model	Spout Size
DX-430	4-1/2" Double Bend Gooseneck
DX-431	6" Double Bend Gooseneck
DX-432	8-1/2" Double Bend Gooseneck





1/4 Turn High Performance Ceramic Cartridge Valves

- Fits all Diamond Series Faucets
- Integral check valve
- Stainless Steel construction
- Fully assembled, easy to install

Model	Description
DX-708	Cold Valve
DX-709	Hot Valve



Coupling Flanges

- Fits all Diamond Series faucets
- Flange seal technology
- Eccentric fittings
- Includes nipples
- 1/2" NPT female inlet
- 1/4" adjustment per flange
- Two rubber washers



iviodei	Description
DX-100	Includes 2 Flanges



Diamond Series Complete Mounting Kit

- (2) 3/8" Stainless Steel Braided Flexible Supply Hoses, 30"L
- Includes 1/2" NPT Close Elbows w/ Swivel Compression fittings on faucet side & 3/8" Compression fittings on water supply side
- (2) 1/2" NPS Nipples, (2) washers & (2) lock nuts
- No soldering or teflon tape required

Diamond Series Mounting Kit

Diamond Series Electronic Faucets



4" Center Wall Mount with Satin Finish

- Infrared Sensor Operated
- Battery Powered Control Module, (4) AA Batteries Included, AC Adapter Optional
- Low Battery Indicator Light
- Easy Adjust Shut-Off Delay, Auto Flush, Auto Time-Out and Range Sensitivity
- 2.2 GPM Aerator Installed
- Includes Control Module, Mechanical Mixing Valve & (3) Supply Hoses
- Replacement Spouts available

16-670

Replacement Spouts

Model	Description
21-433L	4-1/2" Satin Finish Double Bend
21-434L	6-1/2" Satin Finish Double Bend

Replacement Aerators

Model	Description
22-671L	1.0 GPM Honeycomb Aerator
22-6721	2.2 GPM Honeycomb Aerator



Single Hole Wall Mount with Satin Finish

- Infrared Sensor Operated
- Battery Powered Control Module, (4) AA Batteries Included, AC Adapter Optional
- Low Battery Indicator Light
- Easy Adjust Shut-Off Delay, Auto Flush, Auto Time-Out and Range Sensitivity
- 1.0 GPM Aerator Installed
- Includes Control Module, Mechanical Mixing Valve & (3) Supply Hoses



Diamond Series Rotary Twist Waste Valves



New

Stainless Steel Rotary Twist Waste Valves


- Fits 3-1/2" sink opening
- 1-1/4" overflow outlet with cap
- Stainless steel body
- Stainless steel ball valve
- Includes vandal resistant screw for strainer
- Approximately 2-3 times the drain rate of a conventional lever waste drain

Model	Description
22-850	Stainless Steel Rotary Twist Waste Valve
22-851	Short Handle Stainless Steel Rotary Twist Waste Valve



Stainless Steel Ball Valve shown

half open

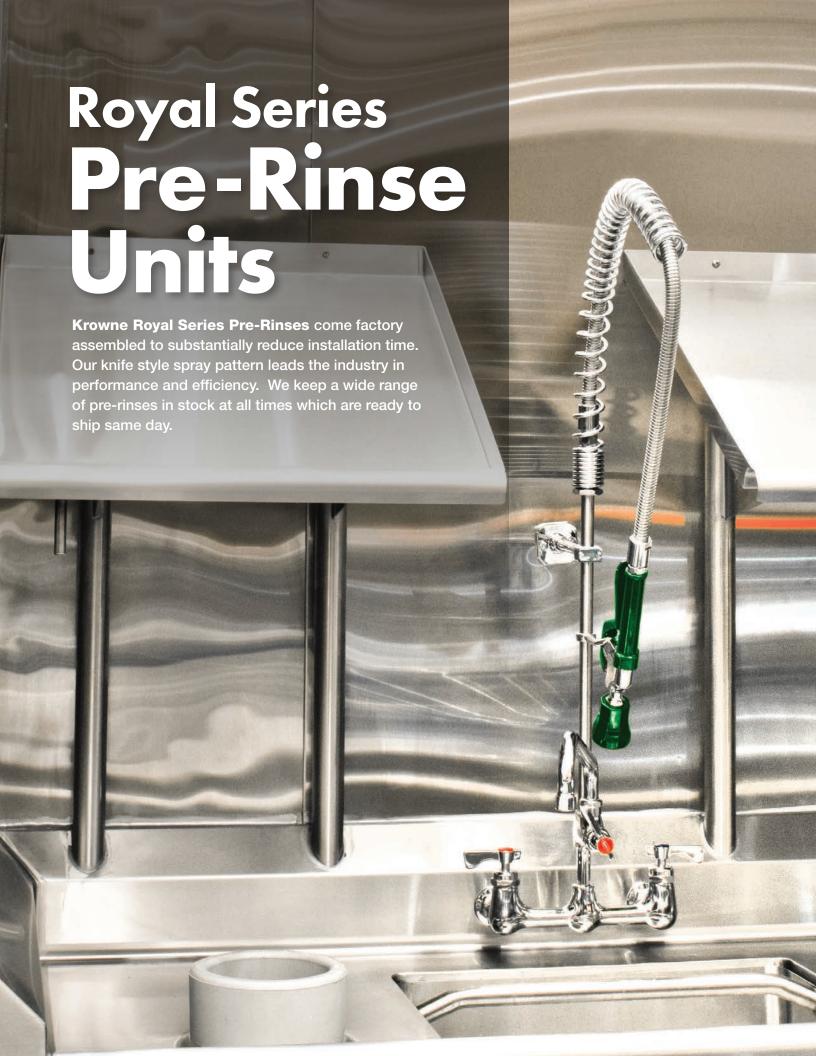

Pre-Rinse Features

Stainless Steel Hose

High performance radial wrap tubing pressure tested to 400 PSI. Corrugated exterior hose with reinforced inner tube.

E-Z Install Swivel Fitting

Allows for quick installation of pre-rinse without requiring plumber to fully rotate hose while assembling.

Knife Style Spray Valve

High performance valve cleans dishes more efficiently than the traditional shower style pattern sold by most competitors. 1.15 GPM with heat resistant bumper.

Wall Bracket

Secures pre-rinse to wall. Included with all models. Can be cut to desired length.

Add-On Faucet

Allows pre-rinse to double as a faucet. Included with 17-109WL or can be added to any other Krowne Pre-Rinse.

Ceramic Cartridge Valves

High performance 1/4 turn ceramic cartridge valves with integral check designed to last longer than traditional rubber compression valves.

Offset Flanges

Eccentric fittings allow easy alignment adjustments for quick installation.

Mounting Kit Included

Everything needed to mount your prerinse is included for ease of installation.







8" Center Wall Mount Pre-Rinse with Wall Bracket

- Pre-assembled to cut installation time
- Includes wall bracket
- ¼ Turn high performance ceramic cartridge valves with integral check
- 1/2" NPT female inlets on 8" centers
- 1.15 GPM spray head
- 35" high with 15" overhang
- Mounting kit included
- Solid chrome plated brass base

Model Case Qty. 17-108WL



8" Center Wall Mount Pre-Rinse with Wall Bracket & Add-On Faucet (12" Spout)

- Pre-assembled to cut installation time
- Includes wall bracket
- ¼ Turn high performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 8" centers
- 1.8 GPM faucet spout
- 1.15 GPM spray head
- 38" high with 15" overhang
- Mounting kit included
- Solid chrome plated brass base

Case Qty. 17-109WL 3

Replacement Parts for 17-108WL & 17-109WL

1/4 Turn Ceramic Cartridge Valves

- Fits all Royal Series pre-rinses
- Integral check valve
- Fully assembled, easy to install



Model Description 21-308L Cold Valve 21-309L Hot Valve

Spray Head

- Interchangeable with most brands
- Ergonomic design
- 1.15 GPM Knife Pattern

Model 21-129L



Pre-Rinse Hose with Grip

 44" flexible stainless steel hose





E-Z Install Flexible Water Line Kit

- (2) 3/8" Stainless Steel Braided Flexible Supply Hoses
- Includes 1/2" NPT Close Elbows w/ Swivel Compression fittings on faucet side & 3/8" Compression fittings on water supply side

■ 22"L water lines

Model 21-443L





Deck Mount Pre-Rinse with Wall Bracket

- Pre-assembled to cut installation time
- Includes wall bracket
- ¼ Turn high performance ceramic cartridge valves with integral check
- 1-1/8" OD x 2-1/4" shank; fits 1-1/4" hole
- 20" water lines w/ 3/8" compression fittings
- 1.15 GPM spray head
- 35" high with 15" overhang
- Mounting hardware included
- Solid chrome plated brass base

Case Qty. 17-202WL 3



Single Hole **Deck Mount Pre-Rinse** with Wall Bracket

- Pre-assembled to cut installation time
- Includes wall bracket
- ¼ Turn high performance ceramic cartridge valve with integral check
- 1/2" NPS male inlet
- 1.15 GPM spray head
- 35" high with 15" overhang
- Mounting hardware included
- Solid chrome plated brass base

17-206WL

Replacement Parts for 17-202WL & 17-206WL

1/4 Turn Ceramic Cartridge Valves

- Fits all Royal Series pre-rinses
- Integral check valve
- Fully assembled, easy to install



Model Description Cold Valve 21-308L 21-309L Hot Valve

Spray Head

- Interchangeable with most brands
- Ergonomic design
- 1.15 GPM Knife Pattern

Model 21-129L



Pre-Rinse Hose with Grip

 44" flexible stainless steel hose

Model 21-133L



13" Replacement Water Line Kit

• For use on New Style Single Hole Deck Mount Pre-Rinses and Faucets





4" Center Raised **Deck Mount Pre-Rinse** with Wall Bracket

- Pre-assembled to cut installation time
- Includes wall bracket
- ¼ Turn high performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 4" centers
- 1.15 GPM spray head
- 38" high with 15" overhang
- Mounting kit included
- Solid chrome plated brass base

Model 17-204WL



8" Center Raised **Deck Mount Pre-Rinse** with Wall Bracket

- Pre-assembled to cut installation time
- Includes wall bracket
- ¼ Turn high performance ceramic cartridge valves with integral check
- 1/2" NPT female inlets on 8" centers
- 1.15 GPM spray head
- 38" high with 15" overhang
- Mounting kit included
- Solid chrome plated brass base

Model 17-208WL

Replacement Parts for 17-204WL & 17-208WL

1/4 Turn Ceramic Cartridge Valves

- Fits all Royal Series pre-rinses
- Integral check valve
- Fully assembled, easy to install





Model 21-308L Description Cold Valve

21-309L

Hot Valve

Spray Head

- Interchangeable with most brands
- Ergonomic design
- 1.15 GPM Knife Pattern

Model 21-129L



Pre-Rinse Hose with Grip

 44" flexible stainless steel hose

Model 21-133L



1/2" x 3/8" **Braided Supply Hoses**

- Includes (2) 3/8" Stainless Steel Braided Flexible Supply Hoses
- 1/2" Female NPT Fittings on faucet side, 3/8" Compression Fittings on supply side

■ 24"L water lines

Model 21-198L





8" Center Wall Mount Solid Arm Pre-Rinse with Wall Bracket

- 12" Solid swivel arm
- Includes wall bracket
- ¼ Turn high performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 8" centers
- 1.15 GPM spray head
- 30" high with 12" overhang
- Mounting kit included
- Solid chrome plated brass base

Model 17-312WL





4" Center Wall Mount Pre-Rinse with Wall Bracket

- Wall Mount on 4" Centers
- Includes wall bracket
- ¼ Turn high performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 4" centers
- 1.15 GPM spray head
- 35" high with 15" overhang
- Solid chrome plated brass base

Model 17-124WL

Replacement Parts for 17-312WL & 17-124WL

1/4 Turn Ceramic Cartridge Valves

- Fits all Royal Series pre-rinses
- Integral check valve
- Fully assembled, easy to install



Model Description Cold Valve 21-308L 21-309L Hot Valve

Spray Head

- Interchangeable with most brands
- Ergonomic design
- 1.15 GPM Knife Pattern

Model 21-129L



Pre-Rinse Hose with Grip

• 44" flexible stainless steel hose





E-Z Install Flexible Water Line Kit

- (2) 3/8" Stainless Steel Braided Flexible Supply Hoses
- Includes 1/2" NPT Close Elbows w/ Swivel Compression fittings on faucet side & 3/8" Compression fittings on water supply side
- 22"L water lines

Model 21-443L



ShelfMaster Pre-Rinse

8" Center Wall Mount ShelfMaster Pre-Rinse with Wall Bracket and Add-On Faucet (12" Spout)

- Designed to fit under shelf without sacrificing reach
- Includes wall bracket
- ¼ Turn high performance ceramic cartridge valves with integral check
- 1/2" NPT female inlets on 8" centers
- Stainless steel chemical rigid tee connector
- 1.15 GPM spray head
- 1.8 GPM faucet spout
- 23-3/4"H with 15" overhang
- Includes 8" Riser (3" Riser optional)
- Mounting kit included
- Solid chrome plated brass base

Model 18-725L





Ceramic Cartridge Valves

Offset Flanges



Optional Chemical Rigid Tee Adapter and optional 3" Riser

Chemical Rigid Tee Assembly

- Fits most manufacturers
- Installs on Pre-Rinse bases
- 3/8" NPT Close Nipple
- 3/8" NPT Female Thread
- 3/8" NPT Tee Fitting on side
- Chrome Plated Brass

Model 21-545L





REPLACEMENT PARTS & ACCESSORIES



Cold 1/4 Turn Ceramic Cartridge Valve



Hot 1/4 Turn Ceramic Cartridge Valve



24" Hose with Grip



Shelfmaster Spring





1/2" x 3/8" Braided Supply Hoses







Space Saver Pre-Rinses

Features apply to all Space Saver Pre-Rinse Units

- Pre-assembled to cut installation time
- Includes Wall Bracket & Add-On Faucet
- ¼ Turn high performance ceramic cartridge valves with integral check
- 1.15 GPM spray head
- 1.8 GPM faucet spout
- Mounting kit included
- Solid chrome plated brass base



4" Center Raised **Deck Mount Space Saver Pre-Rinse**

with Wall Bracket & Add-On Faucet

- 4" centers
- ½" NPT female inlets
- 24-7/8" high with 8" overhang

Model	Spout Size
18-406L	6" Swing Spout
18-408L	8" Swing Spout



Single Hole Deck Mount **Space Saver Pre-Rinse**

with Wall Bracket & Add-On Faucet

- Fits 1-1/4" single hole
- 1-1/8" OD x 2-1/4" shank
- 20" Water lines with 3/8" compression fittings
- 25-1/4" high with 8" overhang

Model	Spout Size
18-506L	6" Swing Spout
18-508L	8" Swing Spout



with Wall Bracket & Add-On Faucet

• 8" centers

18-508L

- ½" NPT female inlets
- 22-1/2" high with 8" overhang

Model	Spout Size
18-706L	6" Swing Spout
18-708L	8" Swing Spout



18-708L

Space Saver Pre-Rinse with Wall Bracket & Add-On Faucet 8" centers

■ 1/2" NPT female inlets

8" Center Raised

Deck Mount

■ 24-7/8" high with 8" overhang

Model	Spout Size
18-606L	6" Swing Spout
18-608L	8" Swing Spout

REPLACEMENT PARTS & ACCESSORIES



Cold 1/4 Turn Ceramic Cartridge



Hot 1/4 Turn Ceramic Cartridge



24" Hose for Space Saver Pre-Rinse



21-163 Spring for Space Saver Pre-Rinse



21-129L Spray Head (1.15 GPM)



Model 21-160-8L 8"L Riser for Space Saver Pre-Rinse



E-Z Install Flexible Water Line Kit

Pre-Rinse Replacement Parts

Interchangeable with most brands



1 21-137 Wall Bracket 2 21-168 Riser (12" Long, 3/8" male three 2 21-160L Riser (18" Long, 3/8" male three 2 21-160-24L Riser (24" Long, 3/8" male three 3 21-161L Spring Retainer	
2 21-160L Riser (18" Long, 3/8" male thre 2 21-160-24L Riser (24" Long, 3/8" male thre	
2 21-160-24L Riser (24" Long, 3/8" male three	ood\
	eau)
3 21-161L Spring Retainer	ead)
4 21-162 24" Spring	
5 21-133L 44" Hose Assembly	
6 21-164L Grip (1/2" NPS Male)	
7 21-165 Hook/Screw Assembly	
8 21-129L Complete Pre-Rinse Spray Val	lve
9 21-171 Spray Head Handle	
10 21-170 Ring (Optional)	
11 21-302L Button Valve	
12 21-179L Spray Head Repair Kit - New 9 (2007 to present)	Style
13 21-166L Spray Head Repair Kit - Old S (Prior to 2007)	tyle





Spray Head Repair Kit (Old Style prior to 2007)



Replacement Pre-Rinse Bases



No.	Model	Description
1	21-108L	8" Center Wall Base
2	21-101L	Single Wall Base

No.	Model	Description
3	21-208L	8" Center Deck Base
4	21-202L	Single Hole Deck Base


Р	No.	Model	Description
ļ	5	21-204L	4" Center Deck Base
	6	21-201L	Single Deck Base

Pre-Rinse Replacement Parts

Spray Head

- Interchangeable with most brands
- Ergonomic design
- Full replacement parts available
- Water saving spray head available

Model	Description
21-129L	1.15 GPM Knife Pattern
21-127L	0.65 GPM Knife Pattern





Knife Style Spray Valve

High performance valve cleans dishes more efficiently than the traditional shower style pattern sold by most competitors. 1.15 GPM with heat resistant bumper.




Pre-Rinse Hose with Grip

- Interchangeable with most brands
- Flexible stainless steel hose

Model	Hose Length	Case Qty.
21-181L	24"L	12
21-133L	44"L	12
21-134L	60"L	12
21-135L	72"L	12
21-136L	96"L	12

Swivel Pre-Rinse Hose Connector









- Interchangeable with most brands
- Turns on and off without obstruction
- 3/8" NPT Male inlet
- 3/8" NPT Female outlet

Case Quantity: 12

_	20
Model	Description
21-138L	Add-On Faucet with 6" Spout
21-149L	Add-On Faucet with 8" Spout
21-139L	Add-On Faucet with 12" Spout
21-140L	Add-On Faucet with 14" Spout
21-141L	Add-On Faucet with 16" Spout
21-1XXL	Add-On Faucet (No Spout)

Pre-Rinse Less Body with Wall Bracket

- Pre-assembled to cut installation time
- Includes wall bracket
- 1.15 GPM spray head
- 35" high with 15" overhang

Model 17-XXXL



Shower Pattern Spray Head

- Interchangeable with most brands
- Different flow rates available
- Full replacement parts available

Model	Description
21-130L	1.15 GPM Spray Head
21-145	1.15 GPM Spray Face
21-142	Replacement Bumper

Angled Pre-Rinse Spray Head

- Interchangeable with most brands
- Reinforced spray head
- Full repair kits available

Model	Description
21-131L	3.18 GPM Spray Head
21-302L	Button Valve Repair Kit
21-142	Replacement Bumper
21-143	3.18 GPM Spray Face

Pot Filler Spray Head

- Interchangeable with most brands
- Reinforced spray head
- Full repair kits available



Model	Description
21-132L	Pot Filler Spray Head
21-302L	Button Valve Repair Kit



Royal Series Plumbing

Krowne Royal Series Faucets are meticulously designed for exceptional durability in the most demanding commercial environments. They are used in grocery, retail, bars, restaurants, healthcare, education and hospitality. Every Royal Series faucet includes the components needed for a quick and efficient install.





4" Center Wall Mount Faucets

- 1/4 Turn high performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 4" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handles
- Solid chrome plated brass base

Faucets		
Model	Spout Size	Case Qty
14-406L	6" Swing Spout	12
14-408L	8" Swing Spout	12
14-410L	10" Swing Spout	12
14-400L	3-1/2" Wide Gooseneck Spout (0.5 GPM)	12
14-401L	6" Wide Gooseneck Spout	12
14-402L	8-1/2" Wide Gooseneck Spout	12
14-4XXL	Faucet Body (No Spout)	12

Replacement Parts		
Model	Description	
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve	
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve	
21-443L	E-Z Install Flexible Water Line Kit	

For spout and aerator options see pages 41 $\&\ 45$



4" Center Wall Mount Faucets with Wrist Blade Handles

- 1/4 Turn high performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 4" centers
- 1.5 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Vandal resistant wrist blade handles
- Solid chrome plated brass base

Replacement Parts		
Model	Description	
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve	
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve	
21-443L	E-Z Install Flexible Water Line Kit	
21-311	Wrist Blade Handle Kit	

Faucets Model	Spout Size	Case Qty
14-406L-W-E4	6" Swing Spout	-
14-410L-W-E4	10" Swing Spout	-
14-400L-W-E2	3-1/2" Wide Gooseneck Spout (0.5 GPM)	-
14-401L-W-E4	6" Wide Gooseneck Spout	-
14-4XXL-W	Faucet Body (No Spout)	12

8" Center Wall Mount Faucets

- 1/4 Turn high performance ceramic cartridge valves with integral check
- 1/2" NPT female inlets on 8" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handles
- Mounting kit included
- Solid chrome plated brass base

Faucets		
Model	Spout Size	Case Qty
14-806L	6" Swing Spout	6
14-808L	8" Swing Spout	6
14-810L	10" Swing Spout	6
14-812L	12" Swing Spout	6
14-814L	14" Swing Spout	6
14-816L	16" Swing Spout	6
14-818L	18" Jointed Spout	6
14-824L	24" Jointed Spout	6
14-801L	6" Wide Gooseneck Spout	6
14-802L	8-1/2" Wide Gooseneck Spout	6
14-8XXL	Faucet Body (No Spout)	6









Ceramic Cartridge Valves

Replacement Parts

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-443L	E-Z Install Flexible Water Line Kit
21-311	Wrist Blade Handle Kit

For spout and aerator options see pages 41 & 45

8" Center Wall Mount Faucets with Wrist Blade Handles

- 1/4 Turn high performance ceramic cartridge valves with integral check
- 1/2" NPT female inlets on 8" centers
- 1.5 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Vandal resistant wrist blade handles
- Mounting kit included
- Solid chrome plated brass base

E	 	£,

Model	Spout Size	Case Qty.
14-808L-W-E4	8" Swing Spout	-
14-812L-W-E4	12" Swing Spout	-
14-801L-W-E4	6" Wide Gooseneck Spout	-
14-802L-W-E4	8-1/2" Wide Gooseneck Spout	-
14-8XXL-W	Faucet Body (No Spout)	6



Replacement Parts

Model	Description
	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-443L	E-Z Install Flexible Water Line Kit

For spout and aerator options see pages 41 & 45





4" Center Deck Mount Faucets

- 1/4 Turn high performance ceramic cartridge valves with integral check
- 1/2" NPS male inlets on 4" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handles
- Solid chrome plated brass base

Faucets Model	Spout Size	Case Qty
15-306L	6" Swing Spout	12
15-308L	8" Swing Spout	12
15-310L	10" Swing Spout	12
15-312L	12" Swing Spout	12
15-314L	14" Swing Spout	12
15-316L	16" Swing Spout	12
15-325L	3-1/2" Wide Gooseneck Spout (0.5 GPM)	12
15-301L	6" Wide Gooseneck Spout	12
15-302L	8-1/2" Wide Gooseneck Spout	12
15-350L	6" Swing Spout w/ Hose Adapter	-
15-3XXL	Faucet Body (No Spout)	12

Replacement Parts

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses

For spout and aerator options see pages 41 & 45

4" Center Deck Mount Faucets with Wrist Blade Handles

- 1/4 Turn high performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 4" centers
- 1.5 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Vandal resistant wrist blade handles
- Solid chrome plated brass base

Faucets Model	Spout Size	Case Qty.
15-308L-W-E4	8" Swing Spout	-
15-312L-W-E4	12" Swing Spout	-
15-325L-W-E2	3-1/2" Wide Gooseneck Spout (0.5 GPM)	-
15-301L-W-E4	6" Wide Gooseneck Spout	-
15-3XXL-W	Faucet Body (No Spout)	12



Replacement Parts

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses
21-311	Wrist Blade Handle Kit

For spout and aerator options see pages 41 & 45





8" Center Deck Mount Faucets

- ¼ Turn high performance ceramic cartridge valves with integral check
- 1/2" NPS male inlets on 8" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handles
- Solid chrome plated brass base

Faucets Model	Spout Size	Case Qty
15-506L	6" Swing Spout	-
15-508L	8" Swing Spout	12
15-510L	10" Swing Spout	-
15-512L	12" Swing Spout	12
15-514L	14" Swing Spout	-
15-516L	16" Swing Spout	12
15-525L	3-1/2" Wide Gooseneck Spout (0.5 GPM)	-
15-501L	6" Wide Gooseneck Spout	-
15-502L	8-1/2" Wide Gooseneck Spout	12
15-5XXL	Faucet Body (No Spout)	12

Replacement Parts

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses

For spout and aerator options see pages 41 & 45

8" Center Deck Mount Faucets with Wrist Blade Handles

- 1/4 Turn high performance ceramic cartridge valves with integral check
- 1/2" NPS male inlets on 8" centers
- 1.5 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Vandal resistant wrist blade handles
- Solid chrome plated brass base



. 0.000.0		
Model	Spout Size	Case Qty.
15-508L-W-E4	8" Swing Spout	-
15-512L-W-E4	12" Swing Spout	-
15-525L-W-E2	3-1/2" Wide Gooseneck Spout (0.5 GPM)	-
15-501L-W-E4	6" Wide Gooseneck Spout	-

12

Faucet Body (No Spout)

Replacement Parts

15-5XXL-W

Faucets

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses
21-311	Wrist Blade Handle Kit

For spout and aerator options see pages 41 $\&\,45$



4" Center Raised Deck Mount Faucets

- ¼ Turn high performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 4" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handles
- Mounting kit included
- Solid chrome plated brass base

raucets	
Model	Spout Size
15-406L	6" Swing Spout
15-408L	8" Swing Spout
15-410L	10" Swing Spout
15-412L	12" Swing Spout
15-414L	14" Swing Spout
15-418L	18" Jointed Spout
15-425L	3-1/2" Wide Gooseneck Spout (0.5 GPM)
15-401L	6" Wide Gooseneck Spout
15-402L	8-1/2" Wide Gooseneck Spout
15-4XXL	Faucet Body (No Spout)

Replacement Parts Model 21-308L Cold 1/4 Turn Ceramic Cartridge Valve 21-309L Hot 1/4 Turn Ceramic Cartridge Valve 1/2" x 3/8" Braided Supply Hoses 21-198L

For spout and aerator options see pages 41 & 45

4" Center Raised Deck Mount Faucets with Wrist Blade Handles

- ¼ Turn high performance ceramic cartridge valves with integral check
- 1/2" NPT female inlets on 4" centers
- 1.5 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Vandal resistant wrist blade handles
- Mounting kit included
- Solid chrome plated brass base



Faucets	
Model	Spout Size
15-408L-W-E4	8" Swing Spout
15-412L-W-E4	12" Swing Spout
15-425L-W-E2	3-1/2" Wide Gooseneck Spout (0.5 GPM)
15-401L-W-E4	6" Wide Gooseneck Spout
15-4XXL-W	Faucet Body (No Spout)

Replacement Parts	
Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses
21-311	Wrist Blade Handle Kit

For spout and aerator options see pages 41 & 45





8" Center Raised Deck Mount Faucets

- ¼ Turn high performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 8" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handles
- Mounting kit included
- Solid chrome plated brass base

Faucets	
Model	Spout Size
15-806L	6" Swing Spout
15-808L	8" Swing Spout
15-810L	10" Swing Spout
15-812L	12" Swing Spout
15-814L	14" Swing Spout
15-818L	18" Swing Spout
15-825L	3-1/2" Wide Gooseneck Spout (0.5 GPM)
15-801L	6" Wide Gooseneck Spout
15-802L	8-1/2" Wide Gooseneck Spout
15-8XXL	Faucet Body (No Spout)

Replacement Parts

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses

For spout and aerator options see pages 41 & 45

8" Center Raised Deck Mount Faucets with Wrist Blade Handles

- 1/4 Turn high performance ceramic cartridge valves with integral check
- 1/2" NPT female inlets on 8" centers
- 1.5 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Vandal resistant wrist blade handles
- Mounting kit included
- Solid chrome plated brass base



Faucets

Model	Spout Size
15-808L-W-E4	8" Swing Spout
15-812L-W-E4	12" Swing Spout
15-825L-W-E2	3-1/2" Wide Gooseneck Spout (0.5 GPM)
15-801L-W-E4	6" Wide Gooseneck Spout
15-8XXL-W	Faucet Body (No Spout)

Replacement Parts

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses
21-311	Wrist Blade Handle Kit

For spout and aerator options see pages 41 & 45









Vacuum Breaker



Integral Stops

Service Sink Faucet with Cast Spout

- Heavy duty flanges with eccentric fittings for quick installations
- Includes wall bracket for spout support
- ¼ Turn high performance ceramic cartridge valves with integral check
- ½" NPT male inlets on 8" centers
- 6-1/2" heavy cast spout with pail hook and hose thread
- Mounting kit included
- Solid rough chrome brass base

Faucets	
Model	Spout Size
16-127	Service Sink Faucet with Lever Handles
16-127-W	Service Sink Faucet with Wrist Blade Handles

16-127 Case Quantity: 6

Replacement Parts 21-308L Cold 1/4 Turn Ceramic Cartridge Valve 21-309L Hot 1/4 Turn Ceramic Cartridge Valve 16-128 Replacement Wall Bracket for 16-127 16-129 Vacuum Breaker Repair Kit 21-311 Wrist Blade Handle Kit 21-443L E-Z Install Flexible Water Line Kit



Floor Mop Sink

- MS-2424 Bowl Size: 21" x 21" x 9"
- MS-1818 Bowl Size: 15" x 15" x 9"
- 3-1/2" drain w/ 2" IPS outlet
- 18 gauge stainless steel
- Mounting hardware included

Model	Overall Size
MS-2424	24" x 24" x 13"
MS-1818	18" x 18" x 13"

Replacement Parts

Description Model 23-145 Replacement Drain

Mop Hangers

- Stainless steel construction with spring action grips
- MH-24 size: 23"L x 4-1/2"H
- MH-5 size: 5"L x 4-1/2"H
- MH-5 includes 30" rubber hose with 3/4" garden hose inlet





4" Center Deck Mount Laundry Tub Faucet

- ¼ Turn high performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 4" centers
- 1.8 GPM aerator installed on 15-306L, Garden hose adapter installed on 15-350L
- Durable full range swing spout with double o-ring construction
- Lever handles
- Solid chrome plated brass base

Model	Spout Size
15-306L	6" Swing Spout
15-350L	6" Swing Spout with Garden Hose Adapter

Adjustable Centers Wall Mount Faucet

- 1/4 Turn high performance ceramic cartridge valves with integral check
- 2-1/4" 8-1/4" adjustable centers
- 1/2" NPT female inlets
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handles
- Mounting kit included
- Solid chrome plated brass base

Faucets

Model	Spout Size
15-612L	12" Swing Spout
15-625L	3-1/2" Wide Gooseneck Spout (0.5 GPM)
15-601L	6" Wide Gooseneck Spout

Replacement Parts

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-443L	E-Z Install Flexible Water Line Kit

For spout and aerator options see pages 41 & 45





8" Wall Mount Full Flow Faucet

- ¼ Turn high performance ceramic cartridge valves
- 3/4" NPT female inlets on 8" centers
- Durable full range swing spout with double o-ring construction
- Cross handles
- Mounting kit included
- Solid chrome plated brass base

Faucets

Model	Spout Size
18-812L	12" Full Flow Spout
18-814L	14" Full Flow Spout

Replacement Parts

Model	Description
21-350L	Cold 1/4 Turn Ceramic Cartridge Valve
21-351L	Hot 1/4 Turn Ceramic Cartridge Valve
21-458L	Replacement 6" Spout
21-460L	Replacement 12" Spout
21-461L	Replacement 14" Spout
21-463L	Replacement 18" Spout









Cross Handle

Full Flow Outlet

3/4" Inlets

16-181L

16-162L

8" Wall Mount Pot Filler Faucet

¼ Turn high performance ceramic cartridge valves with integral check

Replacement Parts

Description

Hot 1/4 Turn Ceramic Cartridge Valve

12" Pot Filler Spout w/ Shut-Off Valve

6" Pot Filler Spout w/ Shut-Off Valve

E-Z Install Flexible Water Line Kit

Model

21-308L

21-309L

21-441L

21-442L

21-443L

- ½" NPT female inlets on 8" centers
- Full flow w/cross handle shut-off at end of spout
- Durable full range swing spout with double o-ring construction
- Lever handles
- Mounting kit included
- Solid chrome plated brass base

Faucets	
Model	Spout Size
16-250L	6" Swing Spout
16-251L	12" Jointed Spout
16-252L	18" Jointed Spout
16-253L	24" Jointed Spout



Single Hole Wall Mount Pot Filler Faucet

- Single hole, single temp
- ¼ Turn high performance ceramic cartridge valve with integral check
- 1/2" NPS male inlet
- Full flow w/cross handle shut-off at end of spout
- Durable full range swing spout with double o-ring construction
- Lever handle
- Solid chrome plated brass base

Faucets	
Model	Spout Size
16-178L	6" Swing Spout
16-179L	12" Jointed Spout
16-181L	18" Jointed Spout
16-182L	24" Jointed Spout

Replacement Parts	
Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-441L	12" Pot Filler Spout w/ Shut-Off Valve
21-442L	6" Pot Filler Spout w/ Shut-Off Valve

Single Hole Deck Mount Pot Filler Faucet

- Single hole, single temp
- 1/4 Turn high performance ceramic cartridge valve with integral check
- ½" NPS male inlet
- Full flow w/cross handle shut-off at end of spout
- Durable full range swing spout with double o-ring construction
- Lever handle
- Solid chrome plated brass base

Faucets	
Model	Spout Size
16-160L	6" Swing Spout
16-161L	12" Jointed Spout
16-162L	18" Jointed Spout
16-163L	24" Jointed Spout



Single Hole Wall Mount Faucet

- Single hole, single temp
- 1/4 Turn high performance ceramic cartridge valve with integral check
- 1/2" NPS male inlets
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handle
- Solid chrome plated brass base



Faucets	
Model	Spout Size
16-170L	6" Swing Spout
16-171L	12" Swing Spout

Replacement Parts	
Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve

For spout and aerator options see pages 41 & 45

Single Hole Wall Mount Remote Spout

- Controlled by foot or knee valve
- 1/2" NPS male inlet, single hole
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Solid chrome plated brass base

Faucets	
Model	Spout Size
16-140L	3-1/2" Wide Gooseneck Spout (0.5 GPM)
16-141L	6" Swing Spout
16-142L	8" Swing Spout
16-143L	10" Swing Spout

For spout and aerator options see pages 41 & 45



Single Hole Deck Mount Remote Spout

- Controlled by foot or knee valve
- ½" NPS male inlet
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Solid chrome plated brass base

Faucets	
Model	Spout Size
16-130L	3-1/2" Wide Gooseneck Spout (0.5 GPM)
16-131L	6" Swing Spout
16-132L	8" Swing Spout
16-133L	10" Swing Spout

For spout and aerator options see pages 41 & 45



Single Hole Deck Mount Pantry Faucet

- Single hole, single temp
- ¼ Turn high performance ceramic cartridge valve with integral check
- 1/2" NPS male inlet
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handle
- Solid chrome plated brass base

Faucets	
Model	Spout Size
16-200L	6" Swing Spout
16-201L	12" Swing Spout
16-202L	3-1/2" Wide Gooseneck Spout (0.5 GPM)
16-203L	6" Gooseneck Spout



Replaceme	Replacement Parts	
Model	Description	
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve	
21-3001	Hot 1// Turn Ceramic Cartridge Valve	

For spout and aerator options see pages 41 & 45

Single Hole Deck Mount Pantry Faucet

- ¼ Turn high performance ceramic cartridge valve with integral check
- 1-1/8" OD x 2-1/4" shank; fits 1-1/4" hole
- 20" water lines with 3/8" compression fittings
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handles
- Solid chrome plated brass base

Faucets	
Model	Spout Size
16-306L	6" Swing Spout
16-312L	12" Swing Spout
16-301L	6" Wide Gooseneck Spout
16-302L	8-1/2" Wide Gooseneck Spout



13" Replacement Water Line Kit

• For use on New Style Single Hole Deck Mount Pre-Rinses and Faucets

Model 21-195L



- Deck mounted control base with ½" NPS female outlet
- Ceramic cartridge valve with built-in temperature limit stop
- Pre-installed water lines with 3/8" compression female inlets
- Single lever handle
- Color coded index
- Solid chrome plated brass
- ADA Compliant

Faucets	
Model	Description
16-330L	Remote Valve with 3-1/2" Remote Gooseneck Spout
16-331L	Remote Valve with 6" Remote Swing Spout
16-332L	Remote Valve with 8" Remote Swing Spout
16-333L	Remote Valve with 10" Remote Swing Spout
16-33XL	Remote Valve Only



Replacement Parts	
Model	Description
21-345L	Single Lever Ceramic Valve Repair Kit
21-346L	Single Lever Handle Repair Kit
21-198L	1/2" x 3/8" Braided Supply Hoses

EZ-Install Water Line Kits

E-Z Install Flexible Water Line Kit

- (2) 3/8" Stainless Steel Braided Flexible Supply Hoses
- Includes 1/2" NPT Close Elbows w/ Swivel Compression fittings on faucet side & 3/8" Compression fittings on water supply side
- 22"L water lines
- No soldering or thread sealant tape required





E-Z Install Flexible Water Line Kit with Mounting Hardware

- (2) 3/8" Stainless Steel Braided Flexible Supply Hoses
- Includes 1/2" NPT Close Elbows w/ Swivel Compression fittings on faucet side & 3/8" Compression fittings on water supply side
- (2) 1/2" NPS Nipples, (2) washers & (2) lock nuts
- 30"L water lines
- No soldering or thread sealant tape required





E-Z Install Straight Copper Water Line Kit

- (2) 3/8" Straight Copper Water Lines
- Includes 1/2" NPT Close Elbows w/ Swivel Compression fittings on faucet side
- 14"L water lines
- No soldering or thread sealant tape required on faucet side



High Volume E-Z Install Flexible Water Line Kit • (2) 1/2" Stainless Steel Braided Flexible Supply Hoses ■ Includes 1/2" NPT Close Elbows w/ Swivel Compression fittings on faucet side & 5/8" OD Compression fittings which are removable to convert to 1/2" NPS Male fittings on water supply side 22"L water lines No soldering or thread sealant tape required on faucet side 21-444L

EASY INSTALLATION

Straight Copper Water Line Installation Guide for Licensed Plumber

Install wall mount faucet on sink. Insert black washer inside brass fitting located at the end of long copper tube and attach to the cold side male water line fitting coming out of faucet and tighten properly. Connect copper tube to water source using compression fitting. Repeat procedure for hot side. After installation, turn water on and check for leaks.



Flexible Stainless Steel Water Line **Installation Guide for Licensed Plumber**

Install wall mount faucet on sink. Insert black washer inside brass fitting located at the end of each stainless steel hose and attach to the cold side male nipple coming out of faucet and tighten properly. Repeat procedure for hot side. Connect to water source using compression fitting or male NPS fitting and tighten properly. After installation, turn water on and check for leaks.



Flexible Water Line & Faucet Mounting Kits



Flexible Water Line Kit with Heavy Duty Wall **Mounting Kit**

- Includes (2) 3/8" Stainless Steel Braided Flexible Supply Hoses
- 1/2" Female NPT Fittings on faucet side, 3/8" Compression Fittings on supply side
- Includes (2) 1/2" NPT Male x 1/2" NPS Female Close Elbows, (2) 1/2" NPS x 1-1/2" Brass Nipples, (2) Lock Nuts, (2) Rosettes, (2) Rubber Gaskets
- 24"L water lines
- No soldering or thread sealant tape required

Model 21-193L



Heavy Duty Wall Mounting Kit

- For wall mount faucets & pre-rinse units
- Space Saving Design
- Includes (2) 1/2" NPT Male x 1/2" NPS Female Close Elbows, (2) 1/2" NPS x 1-1/2" Brass Nipples, (2) Lock Nuts, (2) Rosettes, (2) Rubber Gaskets

Model 21-192L



1/2" x 3/8" Braided **Supply Hoses**

- Includes (2) 3/8" Stainless Steel Braided Flexible Supply Hoses
- 1/2" Female NPT Fittings on faucet side, 3/8" Compression Fittings on supply side
- 24"L water lines
- No soldering or thread sealant tape required

Model 21-198L



Standard Wall Mounting Kit

- For wall mount faucets & pre-rinse units
- Includes (2) ½" NPT Male x 1/2" NPS Female brass elbows, (2) 1/2" NPS x 1-1/2" Brass Nipples, (2) Lock Nuts, (2) Rosettes, (2) Rubber Gaskets

■ Model 21-190L



Space Saver 90° Elbow Kit

- Space Saving Design
- Solid Brass
- Includes (2) 1/2" NPT female close elbows

Model 21-191L



Mounting Kit

- For wall mount faucets & pre-rinse units
- Includes: (2) 1/2" NPS x 1-1/2" Brass Nipples, (2) Lock Nuts,

(2) Rubber Gaskets

(2) Rosettes,

21-194L



Deck Mounting Kit

Includes: (2) 1/2" NPS x 3-1/2" Brass Nipples, (2) Lock Nuts, (2) Rosettes,

(2) Rubber Gaskets

Model 21-196L



Faucet Shank Extension Kit

- For thicker deck installations where extra shank length is needed
- Includes (2) ½" NPS x 2" shank extensions, (4) washers, (2) spacers

21-199L





Thread Sealant Tape

- 1/2" x 260" roll
- 100% pure PTFE
- 0.42 g/cm³ density
- ULc and CSA listed

Model 25-150

Replacement Valves & Handles

Most Popular

1/4 Turn High Performance Ceramic Cartridge Valves

- Fits all Royal Series faucets & pre-rinse units
- Integral check valve
- Fully assembled, easy to install

Model	Description
21-308L	Cold Valve
21-309L	Hot Valve



New

1/4 Turn High **Performance Ceramic** Cartridge Valves **Less Handles**

Handles not included

Model	Description
21-333L	Cold Valve
21-334L	Hot Valve



1/4 Turn Compression Cartridge Valves

- Fits all Royal Series faucets
- Integral check valve
- Fully assembled, easy to install



Model	Description
21-330L	Cold Valve
21-331L	Hot Valve



Cross Handle 1/4 Turn Ceramic Cartridge Valves (Full Flow Faucet Only)

• Fits ¾" full flow faucet only

(18-8 Series) • Fully assembled, easy to install

Model	Description
21-350L	Cold Valve
21-351L	Hot Valve



Lever Handle Kit

- Fits all Krowne faucets
- Contains (2) screws, (2) handles, hot & cold indicator
- Solid chrome plated brass

Model 21-306



Wrist Blade Handle Kit

- Fits all Krowne faucets
- 4" length
- Contains (2) screws, (2) handles, hot & cold indicator
- Solid chrome plated brass

Model 21-311



Vandal Resistant Wrist Blade Handle Kit

- Fits all Krowne faucets
- 4" length
- Contains (2) screws, (2) handles, hot & cold indicator
- Solid chrome plated brass

21-313

Spouts

Universal Swing Spouts

- Built for high volume
- Double O-ring construction
- Fits all Krowne faucets & interchangeable with most brands; includes adapter to fit T&S Brass* faucets



Model	Spout Size	Flow Rate
21-420L	6" Swing Spout	1.8 GPM
21-421L	8" Swing Spout	1.8 GPM
21-422L	10" Swing Spout	1.8 GPM
21-423L	12" Swing Spout	1.8 GPM
21-424L	14" Swing Spout	1.8 GPM
21-425L	16" Swing Spout	1.8 GPM
21-426L	18" Jointed Spout	1.8 GPM

Gooseneck Spouts & **Double Bend Swing Spouts**

- Double O-ring construction
- Fits all Krowne faucets
- Interchangeable with most brands; includes adapter to fit T&S Brass* faucets





Model	Spout Size	Height	Flow Rate
21-427L	3-1/2" Wide Gooseneck Spout	7-1/4"	0.5 GPM
21-428L	6" Wide Gooseneck Spout	8-1/2"	1.8 GPM
21-429L	8-1/2" Wide Gooseneck Spout	10"	1.8 GPM
21-430L	4-1/2" Wide Double Bend Spout	6"	0.5 GPM
21-431L	6" Wide Double Bend Spout	8-1/2"	1.8 GPM
21-432L	8-1/2" Wide Double Bend Spout	11"	1.8 GPM

Universal Swing Spouts Less Aerators

- Double O-ring construction
- Fits all Krowne faucets & interchangeable with most brands; includes adapter to fit T&S Brass* faucets
- For aerator options, see page 45



Model	Spout Size
21-420L-X	6" Swing Spout
21-421L-X	8" Swing Spout
21-422L-X	10" Swing Spout
21-423L-X	12" Swing Spout
21-424L-X	14" Swing Spout
21-425L-X	16" Swing Spout
21-427L-X	3-1/2" Wide Gooseneck Spout
21-428L-X	6" Wide Gooseneck Spout
21-429L-X	8-1/2" Wide Gooseneck Spout
21-430L-X	4-1/2" Wide Double Bend Spout
21-431L-X	6" Wide Double Bend Spout
21-432L-X	8-1/2" Wide Double Bend Spout

New

3/4" Full Flow Replacement Spouts

Used on 18-8XXL Faucets



Model	Spout Size
21-458L	6-1/2" Swing Full Flow Spout
21-460L	12" Swing Full Flow Spout
21-461L	14" Swing Full Flow Spout
21-463L	18" Swing Full Flow Spout
21-465L	18" Jointed Full Flow Spout
21-467L	24" Jointed Full Flow Spout

New

Spout Extensions

- Adds flexibility to accommodate most swivel spout lengths
- Cannot be used on 3/4" Full Flow Spout



Model	Spout Size
21-405L	6" Extension
21-404L	12" Extension
21-469L	12" Full Flow Extension

Replacement Spout with Shut-Off Valve

Used on Pot Filler Faucets

Model	Spout Size
21-442L	6" Swing
21-4411	12" Swing



Rigid Gooseneck Spouts

■ 3/8" Male Threading

			- 6
Model	Spout Size	GPM	L
21-227L	3-3/4"W Spout	0.5	
21-228L	5-3/4"W Spout	0.5	
21-229L	8"W Spout	0.5	

Coupling Flanges



Coupling Flanges

- Fits all Royal Series faucets
- Eccentric fittings
- 1/2" NPT female inlet
- 1/4" adjustment per flange
- Two rubber washers

Model 21-401L



Coupling Flanges with Built-in Shut-off Valves

- Fits all Royal Series faucets
- Built-in shut-off valve
- Eccentric fittings
- 1/2" NPT female inlet
- Two rubber washers

Model 21-452L







Medium Adjustable **Supply Inlets**

- Fits Krowne Royal Series
- Adjustable centers
- 1" total range
- 1/2" NPT female inlet
- Two rubber washers

Model 21-402L



Large Adjustable **Supply Inlets**

- Fits Krowne Royal Series
- Adjustable centers
- 2" total range
- 1/2" NPT female inlet
- Two rubber washers

Model 21-403L



Replacement Washer Set

- 12 pieces per set
- Fits all Royal Series coupling flanges

Model 21-407

Coupling Flange Adapters



The Ultimate E-Z Install Faucet Adapter

- Allows you to mount all Royal Series faucets on existing Fisher*, Chicago*, Central Brass*. and 12-8XXL Krowne supply inlets
- Not required for T&S* brass
- Eliminates the need to change supply inlets on sink
- Substantially cuts installation time

Model 21-534L

Quick Connect for Fisher*

- Adapter to easily attach to existing Fisher* Couplings
- Quick & Easy installation



Model 21-500L



Replacement Valves for Fisher*

- Fits most Fisher* models
- Includes check valve

Spout Size Model 21-320L Cold Stem Assembly 21-321L Hot Stem Assembly



Quick Connect for Chicago*

- Allows Krowne 14-8XXL Series to mount on existing Chicago* Faucet fittings
- Quick & Easy installation

Model 21-532L



Quick Connect for All Krowne Silver Series

- Allows you to mount Royal Series Faucets on 12-8XXL Commercial Series supply inlets
- Quick & Easy installation

Model 21-528L



Quick Connect for Central Brass*

- Adapter to easily attach Royal Series faucets to existing Central Brass* Couplings
- Quick & Easy installation





Quick Connect for Central Brass*

- Adapter to easily attach 12-8 series faucets to existing Central Brass* Couplings
- Quick & Easy installation

Model 21-525L



Adapters & Vacuum Breakers



Chemical Swivel Tee Assembly

- Fits most manufacturers
- Installs on spout opening
- 3/8" NPT Female Tee Fitting on side
- Spout Fitting on Top
- Chrome Plated Brass
- Adapter to fit T&S Brass* included

21-546L



Chemical Rigid Tee Assembly

- Fits most manufacturers
- Installs on Pre-Rinse bases
- 3/8" NPT Close Nipple
- 3/8" NPT Female Thread
- 3/8" NPT Tee Fitting on side
- Chrome Plated Brass

Model 21-545L

Vacuum Breaker Assembly

- 6" centers
- Installs in backsplash
- 1/2" NPT male threads
- Adjustable flanges
- Polished chrome plated brass body

Model 21-455L



Vacuum Breaker

- Converts Royal Series faucet to Utility Spray or Pot Filler
- Fits onto standard size spout opening
- Hose attaches to outlet
- High water flow with minimal pressure loss
- Temperature 40°F -140°F
- Pressure 20-125 PSI

Model 21-450L



In-Line Vacuum Breaker

- Prevents back flow
- For hose thread faucets where Pre-Rinse or spray hoses are attached
- Prevents back flow of contaminated water into safe drinking water supply



3/8" NPS female outlet

Model 21-109L



Spout on Pre-Rinse Body Adapter

- Rigid to Swing adapter
- Allows conversion of faucets with 3/8" NPT female outlets to accept swing spouts or swivel gooseneck spouts

Model 21-110L



Pre-Rinse Hose to 1/2" NPT Male Adapter

 Converts Pre-rinse hose to 1/2" Male fitting

Model 21-114L



Top of Riser (Rigid) to Swing Adapter

- Allows riser pipe to accommodate swing spout or swivel gooseneck spout
- 3/8" NPT female inlet

Model 21-115L



Swing to Riser Pipe Adapter for Pre-Rinses

- Allows conversion of faucets with swivel spouts to accept 3/8" NPT male riser pipes or rigid gooseneck spouts
- Wrench included

Model 21-118L

Spout Adapters

Model	Spout Size	
21-117L	Spout Adapter for Chicago* Allows Krowne Spout to fit on Chicago* 00-47 Series Faucets	
21-125L	Spout Adapter for Fisher* Allows Krowne Spout to fit on Fisher* Faucets	
21-524L	Spout Adapter for Central Brass* Allows Krowne Spout to fit on Central Brass* 00-47 Series Fauce	ets

Pre-Rinse Hose to Top of Riser Adapter

Model	Spout Size	
21-112L	Adapter for Fisher* Converts Pre-Rinse Hose to 1/4" Male fitting	(LEA
21-113L	Adapter for Chicago* Converts Pre-Rinse Hose to 3/8" Male fitting	

Aerators/Outlets

- 55/64-27 Female Thread Outlets
- 15/16 Male Thread Outlets







Aerated Stream

Female

Aerators

Female

Model	Flow Rate
22-600L	0.50 GPM Female Thread
22-608L	1.00 GPM Female Thread
22-609L	1.20 GPM Female Thread
22-610L	1.50 GPM Female Thread
22-626L	1.75 GPM Female Thread
22-611L	2.20 GPM Female Thread

Male

Model	Flow Rate
22-620L	0.50 GPM Male Thread
22-621L	1.00 GPM Male Thread
22-622L	1.20 GPM Male Thread
22-625L	1.50 GPM Male Thread
22-628L	2.20 GPM Male Thread

Aerators (Vandal Resistant)









Female

Model	Flow Rate
22-584L	0.50 GPM Female Thread
22-586L	1.00 GPM Female Thread
22-640L	1.20 GPM Female Thread
22-588L	1.50 GPM Female Thread
22-634L	2.20 GPM Female Thread

Male

Model	Flow Rate
22-585L	0.50 GPM Male Thread
22-587L	1.00 GPM Male Thread
22-650L	1.20 GPM Male Thread
22-589L	1.50 GPM Male Thread
22-633L	2.20 GPM Male Thread



Laminar Stream





Laminar Flow Outlets

Female

Model	Flow Rate
22-592L	0.50 GPM Female Thread
22-594L	1.50 GPM Female Thread

Male

Model	Flow Rate
22-591L	0.50 GPM Male Thread
22-593L	1.50 GPM Male Thread



Laminar Stream







Includes Install Key

Laminar Flow Outlets (Vandal Resistant)

Female

Model	Flow Rate
22-598L	0.50 GPM Female Thread
22-602L	1.00 GPM Female Thread
22-604L	1.50 GPM Female Thread

Male

Model	Flow Rate
22-599L	0.50 GPM Male Thread
22-603L	1.00 GPM Male Thread
22-605L	1.50 GPM Male Thread







Male

Multi-Laminar Spray Outlets

Female

Model	Flow Rate
22-572L	0.35 GPM Female Thread
22-574L	0.50 GPM Female Thread
22-576L	1.00 GPM Female Thread

Male

Model	Flow Rate
22-573L	0.35 GPM Male Thread
22-575L	0.50 GPM Male Thread
22-577L	1.00 GPM Male Thread









Female

WOUCI	riow hate
22-578L	0.35 GPM Female Thread
22-580L	0.50 GPM Female Thread

Multi-Laminar Spray Outlets (Vandal Resistant)



Garden Hose **Adapters**





Female Garden Hose Adapter

Model	Description
22-632L	Female Garden Hose Adapte

Male Garden Hose Adapter

Model	Description
22-631L	Male Garden Hose Adapter



Lavatory Faucets

Krowne offers an extensive selection of Lavatory Faucets for multiple environments including restrooms, schools, hotels, medical offices, bars, restaurants and more. Our water saving aerators and adjustable metering valves are useful in high volume applications to limit the consumption of water.



Faucet

Model Description

14-510L Single Hole Single Lever Lavatory Faucet

New

Single Hole Single Lever Lavatory Faucet

- Ceramic cartridge valve with built-in temperature limit stop
- Single hole 3/8" NPS male inlet
- 1.5 GPM aerator installed
- Single lever handle
- Color coded index
- Solid chrome plated brass
- ADA Compliant

Replacement Parts

Model	Description
21-345L	Single Lever Ceramic Valve Repair Kit
21-346L	Single Lever Handle
21-198L	1/2" x 3/8" Braided Supply Hoses
For aerator ontions see page 45	





Faucet

Model

Description

14-550L Single Hole Single Lever Lavatory Faucet

New

Single Hole Single Handle Lavatory Faucet

- Ceramic cartridge valve with metal stem
- Pre-installed 3/8" compression water lines
- 1.2 GPM aerator installed
- Single lever handle
- Chrome plated stainless steel
- ADA Compliant

Replacement Parts

Model	Description
21-344L	Replacement Single Lever Valve
21-195L	13" Replacement Water Line Kit

For aerator options see page 45





Faucet

Model

Description

14-570L

4" Deck Mount Lavatory Faucet with Cast Spout

New

4" Deck Mount Lavatory Faucet with Cast Spout

- ¼ Turn high performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 4" centers
- 1.5 GPM aerator installed
- Lever handles
- Color coded index
- Solid chrome plated brass
- ADA compliant

Replacement Parts

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses

For aerator options see page 45





Faucet

Model

4" Deck Mount Lavatory Faucet 14-580L with Wrist Blade Handles

New

4" Deck Mount Lavatory Faucet with Cast Spout and Wrist Blade Handles

- ¼ Turn high performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 4" centers
- 1.5 GPM aerator installed

For aerator options see page 45

- Vandal resistant wrist blade handles
- Color coded index
- Solid chrome plated brass
- ADA compliant

Replacement Parts

Ropiacom	Ropideomeni i dilo	
Model	Description	
21-333L	Cold 1/4 Turn Ceramic Cartridge Valve Less Handle	
21-334L	Hot 1/4 Turn Ceramic Cartridge Valve Less Handle	
21-198L	1/2" x 3/8" Braided Supply Hoses	
21-313	Vandal Resistant Wrist Blade Handle Kit	





Faucet

Description

14-530L 4" Deck Mount Metering Lavatory Faucet

New Style

4" Center Deck Mount Metering Lavatory Faucet

- Self-closing metering valves with adjustable timed flow (3-20 seconds)
- 1/2" NPS male inlets on 4" centers
- 2.2 GPM vandal resistant aerator installed
- Vandal resistant push button cap
- Solid chrome plated brass
- ADA Compliant

Replacement Parts

Model	Description
21-363L	Metering Valve Repair Kit (Hot or Cold)
21-198L	1/2" x 3/8" Braided Supply Hoses







Faucet

Model Description

14-560L Single Hole Metering Lavatory Faucet

New Style

Single Hole Deck Mount Metering Lavatory Faucet

- Single hole, single temperature
- Self-closing metering valves with adjustable timed flow (3-20 seconds)
- ½" NPS male inlet
- 2.2 GPM vandal resistant aerator installed
- Vandal resistant push button cap
- Solid chrome plated brass
- ADA Compliant

Replacement Parts

Model

21-363L Metering Valve Repair Kit (Hot or Cold)

For aerator options see page 45





Faucet

Model Description

Single Hole Faucet with 5-5/8"W 16-450L Rigid Gooseneck

Single Hole Faucet with 5-5/8"W Rigid Gooseneck Spout


- ¼ Turn high performance ceramic cartridge valves w/ integral check
- 1-1/8" OD x 2-1/4" shank; fits 1-1/4" hole
- 20" water lines w/ 3/8" compression fittings
- 1.2 GPM aerator installed, 2.2 GPM aerator included
- Lever handles
- Color coded index
- Solid chrome plated brass
- ADA Compliant

Replacement Parts

Model	Description	
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve	
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve	
21-195L	13" Replacement Water Line Kit	
21-311	Wrist Blade Handle Kit	

For aerator options see page 45



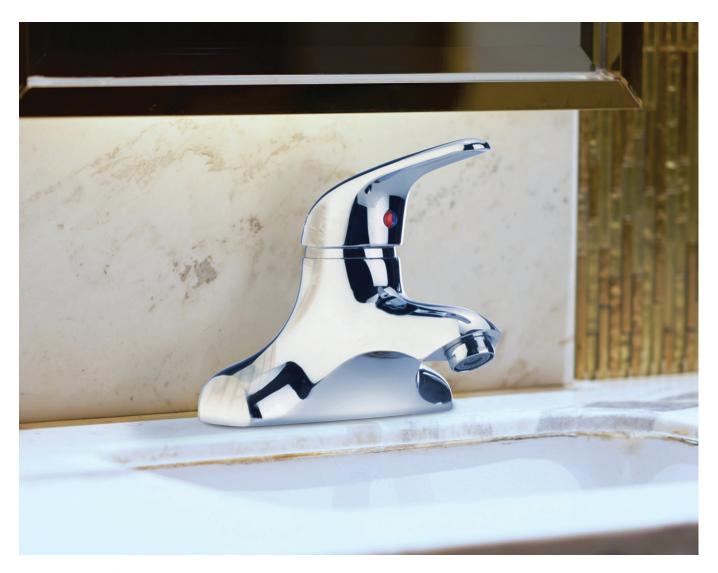



Faucets Model 14-520L 4" Deck Mount Lavatory Faucet with Cast Spout 4" Deck Mount Lavatory Faucet with Cast Spout 14-521L Includes Plastic Pop-Up Drain

4" Center Deck Mount Lavatory Faucet with Cast Spout

- Ceramic cartridge valve with built-in temperature limit stop
- ½" NPS male inlets on 4" centers
- 0.5 GPM aerator installed, 1.5 GPM aerator included
- Single lever handle
- Model 14-521L includes Pop-Up Drain
- Color coded index
- Solid chrome plated brass
- ADA Compliant

Replacement Parts

Replacement 1 ans		
Model	Description	
21-345L	Single Lever Ceramic Valve Repair Kit	
21-346L	Single Lever Handle Repair Kit	
21-198L	1/2" x 3/8" Braided Supply Hoses	

For aerator options see page 45







Faucet

4" Deck Mount Lavatory Faucet with 14-546L 3-3/4"W Rigid Gooseneck

4" Center Deck Mount Lavatory Faucet with 3-3/4" Wide Rigid Gooseneck Spout

- 1/4 Turn high performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 4" centers
- 0.5 GPM aerator installed, 1.5 GPM aerator included
- Wrist blade handles
- Color coded index
- Solid chrome plated brass
- ADA Compliant

Replacement Parts

Model	Description	
21-333L	Cold 1/4 Turn Ceramic Cartridge Valve Less Handle	
21-334L	Hot 1/4 Turn Ceramic Cartridge Valve Less Handle	
21-198L	198L 1/2" x 3/8" Braided Supply Hoses	
21-311 Wrist Blade Handle Kit		
For aerator options see page 45		





Faucet

Model

Description

14-840L

8" Deck Mount Lavatory Faucet with 5-3/4"W Rigid Gooseneck Spout

8" Deck Mount Lavatory Faucet with 5-3/4" Wide Rigid Gooseneck Spout

- ¼ Turn high performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 8" centers
- 1.2 GPM aerator installed, 2.2 GPM aerator included
- Wrist blade handles
- Color coded index
- Solid chrome plated brass
- ADA Compliant

Replacement Parts

Model	Description	
21-333L	Cold 1/4 Turn Ceramic Cartridge Valve Less Handle	
21-334L	Hot 1/4 Turn Ceramic Cartridge Valve Less Handle	
21-198L	1/2" x 3/8" Braided Supply Hoses	
21-311 Wrist Blade Handle Kit		
F		







Faucet

Model

Description

14-841L

8" Deck Mount Lavatory Faucet with 8"W Rigid Gooseneck Spout

8" Deck Mount Lavatory Faucet with 8" Wide Rigid Gooseneck Spout

- ¼ Turn high performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 8" centers
- 1.2 GPM aerator installed, 2.2 GPM aerator included
- Wrist blade handles
- Color coded index
- Solid chrome plated brass
- ADA Compliant

Replacement Parts

Model	Description	
21-333L	Cold 1/4 Turn Ceramic Cartridge Valve Less Handle	
21-334L	Hot 1/4 Turn Ceramic Cartridge Valve Less Handle	
21-198L	1/2" x 3/8" Braided Supply Hoses	
21-311 Wrist Blade Handle Kit		
For aerator options see page 45		





Single Hole Wall Mount Self-Closing Faucet

- Single hole, single temp
- Self-closing twist valve
- 1/2" NPS male inlet
- 1.8 GPM aerator installed
- Cross handle with color coded index
- Solid chrome plated brass

Model	Description
16-470L	Single Hole Wall Mount Self-Closing Faucet

Electronic Sensor Faucets

Krowne Electronic Sensor Faucets are designed to conserve water, reduce the spread of illness and infection, and prevent cross contamination. Each faucet is uniquely designed for easy installation and maintenance in all applications and they come with an industry leading 3-year warranty.





Diamond Series Electronic Sensor Faucets

DIAM®ND series



4" Center Wall Mount with Satin Finish

- Infrared Sensor Operated
- Battery Powered Control Module, (4) AA Batteries Included, AC Adapter Optional
- Low Battery Indicator Light
- Easy Adjust Shut-Off Delay, Auto Flush, Auto Time-Out and Range Sensitivity
- 2.2 GPM Aerator Installed
- Includes Control Module, Mechanical Mixing Valve & (3) Supply Hoses
- Replacement Spouts available

Model 16-670

Replacement Spouts Model Description

21-433L	4-1/2" Satin Finish Double Bend
21-434L	6-1/2" Satin Finish Double Bend

Replacement Aerators

Model	Description	
22-671L	1.0 GPM Honeycomb Aerator	
22-672L	2.2 GPM Honeycomb Aerator	

DIAM®ND series



Single Hole Wall Mount with Satin Finish

- Infrared Sensor Operated
- Battery Powered Control Module, (4) AA Batteries Included, AC Adapter Optional
- Low Battery Indicator Light
- Easy Adjust Shut-Off Delay, Auto Flush, Auto Time-Out and Range Sensitivity
- 1.0 GPM Aerator Installed
- Includes Control Module, Mechanical Mixing Valve & (3) Supply Hoses

16-675



Single Hole Wall Mount

- Infrared Sensor Operated
- Battery Powered Control Module, (4) AA Batteries Included, AC Adapter Optional
- Low Battery Indicator Light
- 2.2 GPM Aerator Installed
- Includes Control Module, Mechanical Mixing Valve & (3) Supply Hoses
- Solid Chrome Plated Brass

Model	Description
16-190	4-1/2" Wide Gooseneck Spout
16-191	6" Wide Gooseneck Spout



4" Center Deck Mount with Cast Spout

- Infrared Sensor Operated
- Battery Powered Control Module, (4) AA Batteries Included, AC Adapter Optional
- Low Battery Indicator Light
- 2.2 GPM Aerator Installed
- Includes Control Module, Mechanical Mixing Valve & (3) Supply Hoses
- Solid Chrome Plated Brass





Model 16-197



Single Hole Deck Mount

- Infrared Sensor Operated
- Battery Powered Control Module, (4) AA Batteries Included, AC Adapter Optional
- Low Battery Indicator Light
- 2.2 GPM Aerator Installed
- Includes Control Module, Mechanical Mixing Valve & (3) Supply Hoses
- Solid Chrome Plated Brass

Model

16-654



Single Hole Deck Mount with Deck Plate

- Infrared Sensor Operated
- Battery Powered Control Module, (4) AA Batteries Included, AC Adapter Optional
- Low Battery Indicator Light
- 2.2 GPM Aerator Installed
- Includes Control Module, Mechanical Mixing Valve & (3) Supply Hoses
- Solid Chrome Plated Brass

Model	Description	
16-654P	Includes 4" Deck Plate	
16-654P8	Includes 8" Deck Plate	



Single Hole Deck Mount with Cast Spout

- Infrared Sensor Operated
- Battery Powered Control Module, (4) AA Batteries Included, AC Adapter Optional
- Low Battery Indicator Light
- 2.2 GPM Aerator Installed
- Includes Control Module, Mechanical Mixing Valve & (3) Supply Hoses
- Solid Chrome Plated Brass

Model

16-196



Single Hole Deck Mount with Cast Spout & Deck Plate

- Infrared Sensor Operated
- Battery Powered Control Module, (4) AA Batteries Included, AC Adapter Optional
- Low Battery Indicator Light
- 2.2 GPM Aerator Installed
- Includes Control Module, Mechanical Mixing Valve & (3) Supply Hoses
- Solid Chrome Plated Brass

Model	Description
16-196P	Includes 4" Deck Plate
16-196P8	Includes 8" Deck Plate

Built-in Control Module Faucets



Single Hole Deck Mount Angled Faucet

- Infrared sensor operated
- Includes faucet, mechanical mixing valve, (3) supply hoses, 1/2" x 1/2" debris filter and (4) AA batteries (not included)
- Built-in battery powered control module
- Low battery indicator light
- 30 seconds auto shut-off
- 2.2 GPM aerator installed
- Solid chrome plated brass

Model 16-656







Single Hole Wall Mount Straight Faucet

- Infrared sensor operated
- Includes faucet, mechanical mixing valve, (3) supply hoses, 1/2" x 1/2" debris filter and (4) AA batteries (not included)
- Built-in battery powered control module
- Low battery indicator light
- 30 seconds auto shut-off
- 2.2 GPM aerator installed
- Solid chrome plated brass



Model 16-655



Single Hole Deck Mount with 4-1/2" Rigid Gooseneck Spout

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Low battery indicator light
- 4-1/2"W rigid gooseneck spout
- 2.2 GPM aerator installed
- Includes control module, mechanical mixing valve & (3) supply hoses
- Solid chrome plated brass

Model	Description
16-649	Faucet

Model	Description
16-649P	Faucet with 4" Deck Plate
16-649P8	Faucet with 8" Deck Plate



Single Hole Deck Mount with 6" Rigid Gooseneck Spout

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Low battery indicator light
- 6"W rigid gooseneck spout
- 2.2 GPM aerator installed
- Includes control module, mechanical mixing valve & (3) supply hoses
- Solid chrome plated brass

Model	Description
16-650	Faucet

Model	Description
16-650P	Faucet with 4" Deck Plate
16-650P8	Faucet with 8" Deck Plate

Electronic Faucet Replacement Parts & Accessories



Control Module

Model 16-198



Mechanical Mixing Valve with Built-in **Check Valve**

Model 16-402L



Thermostatic Mixing Valve with Built-in **Check Valves**

Model 16-405L ■ 1070 ASSE approved



AC Adapter

 Eliminates the need for batteries

Model 16-199



Water Supply Hoses for Electronic Faucets

- Feeds water from water supply to mixing valve
- 1/2" Female NPS x 3/8" compression
- 2 18" hoses included



Spout Supply Hose for Wall Mount **Electronic Faucets**

- Fits wall mount e-faucets
- Feeds water from mixing valve to faucet
- (1) 18"L water supply hose
- 3/8" Female NPS x 1/2" Female NPS

Model 16-512



Spout Supply Hose for **Deck Mount Electronic Faucets**

- Fits deck mount e-faucets (except 16-654)
- Feeds water from mixing valve to faucet
- (1) 18"L water supply hose
- 1/4" Female NPS x 1/2" Female NPS

Model 16-511



Spout Supply Hose for 16-654 Faucet

- Fits 16-654 faucets
- Feeds water from mixing valve to faucet
- (1) 18"L water supply hose
- 3/8" Female NPS x 1/2" Female NPT

Model 16-517





Flat Sensor with Cable

 Fits models 16-190, 16-191, 16-197, 16-670

16-505




Convex Sensor with Cable

• Fits models 16-196, 16-649, 16-650, 16-654

16-506

Hydro Generator



- No AC power required
- Eliminates the need for batteries

Model 16-501

Electronic Faucet Replacement Parts & Accessories



4" Deck Plate

• Fits all Krowne single hole deck mount electronic faucets

Model 16-189



• Fits all Krowne single hole deck mount electronic faucets

Model 16-186



Deck Mount Soap Dispenser

- Fits in 1-1/8" Hole
- 13 oz.

Model H-101



Electronic Faucet Daisy Chain Parts & Accessories

 Connect multiple electronic faucets to one power source using our Daisy Chain parts and accessories





Box Mount Transformer

- Box mounted power converter to power up to 8 electronic faucets
- For use with 16-513 Daisy Chain Extension Cable
- For use with 16-514 5' Long Extension Cable





AC Adapter for Daisy Chain

- Provides power for up to 8 electronic faucets
- For use with 16-513 Daisy Chain Extension Cable
- For use with 16-514 5' Long Extension Cable

16-199



Daisy Chain Extension Cable

- For connecting up to 8 electronic sensor faucets to a single power supply
- For use with 16-514 5'L Extension Cable
- For use with 16-515 AC Adapter for Daisy Chain
- For use with 16-516 Box Mount Transformer

Model 16-513



5 ft. Extension Cable

- 5' long wire provides additional length
- For use with 16-513 Daisy Chain Extension Cable
- For use with 16-515 and 16-199 AC Adapters
- For use with 16-516 Box Mount Transformer

Model 16-514

Silver Series Plumbing

Krowne Silver Series plumbing products are built for mid to high volume applications. We have meticulously engineered this product line to combine both quality and value resulting in a healthy balance geared for most environments.

Available in over 100 different configurations, you can rest easy knowing you are receiving a high quality plumbing product at a competitive price.



4" Center Wall Mount Faucet

- ¼ Turn ceramic valves
- 1/2" NPS male inlets on 4" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handles
- Chrome plated finish



Model	Spout Size	Case Qty
10-406L	6" Swing	20
10-410L	10" Swing	20
10-400L	3-1/2" Wide Gooseneck (0.5 GPM)	20
10-400L-W	3-1/2" Wide Gooseneck (0.5 GPM) with Wrist Blade Handles	-

Replacement Parts

Ropidcomon rano	
Model	Description
21-300L	1/4 Turn Ceramic Valve Kit
21-443L	E-Z Install Flexible Water Line Kit

For aerator and spout options see pages 45 & 64

4" Center Wall Mount Faucet with Double Bend Spout

- ¼ Turn ceramic valves
- 1/2" NPS male inlets on 4" centers
- 0.50 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handles
- Chrome plated finish



Model	Spout Size	Case Qty
10-435L	4-1/2"W Double Bend Spout	20
10-435L-W	4-1/2"W Double Bend Spout with Wrist Blade Handles	-

Replacement Parts

ı	Model	Description
ı	21-300L	1/4 Turn Ceramic Valve Kit
ı	21-443L	E-Z Install Flexible Water Line Kit

For aerator and spout options see pages 45 & 64

8" Center Wall Mount Faucet

- ¼ Turn ceramic valves
- 1/2" NPT female inlets on 8" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handles
- Chrome plated finish

Model	Spout Size	Case Qty
12-806L	6" Swing	12
12-808L	8" Swing	12
12-810L	10" Swing	12
12-812L	12" Swing	12
12-814L	14" Swing	12
12-816L	16" Swing	12
12-818L	18" Jointed	12
12-824L	24" Jointed	12
12-801L	6" Wide Gooseneck	12
12-802L	8-1/2" Wide Gooseneck	12
12-8XXL	Faucet Body (No Spout)	12



Replacement Parts

Model	Description
21-310L	1/4 Turn Ceramic Valve Kit
21-445L	E-Z Install Flexible Water Line Kit

For aerator and spout options see pages 45 & 64

4" Center Deck Mount Faucet

- ¼ Turn ceramic valves
- ½" NPS male inlets on 4" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handles
- Chrome plated finish



Model Spout Size	
model opout oize	
11-406L 6" Swing Spout	
11-412L 12" Swing Spout	
11-400L 3-1/2" Wide Gooseneck Spout (0.5 G	PM)
11-401L 6" Gooseneck Spout	
11-450L Laundry Faucet w/ Hose Adapter	

Replacement Parts	
Model	Description
21-300L	1/4 Turn Ceramic Valve Kit
21-198L	1/2" x 3/8" Braided Supply Hoses
ooz	1,2 x 5,5 Braided dupply 110000

For aerator and spout options see pages 45 & 64

4" Center Deck Mount Faucet With Double Bend Spout

- ¼ Turn ceramic valves
- ½" NPS male inlets on 4" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handles
- Chrome plated finish



Faucets	
Model	Spout Size
11-435L	4-1/2" Wide Double Bend (0.5 GPM)
11-460L	6" Wide Double Bend

Replacement Parts

Model	Description
21-300L	1/4 Turn Ceramic Valve Kit
21-198L	1/2" x 3/8" Braided Supply Hoses

For aerator and spout options see pages 45 & 64

4" Center Deck Mount Faucet with Wrist Blade Handles

- ¼ Turn ceramic valves
- 1/2" NPS male inlets on 4" centers
- 0.5 GPM aerator installed

 Durable full range swing spout with double o-ring construction

- Wrist blade handles
- Chrome plated finish



Faucet

Model Spout Size

11-400L-W 3-1/2" Wide Gooseneck Spout (0.5 GPM)

Replacement Parts

Model	Description
21-300L	1/4 Turn Ceramic Valve Kit
21-198L	1/2" x 3/8" Braided Supply Hoses
21-312	Silver Series Wrist Blade Handle Kit

For aerator options see page 45

4" Center Deck Mount Single Lever Faucet

- Ceramic cartridge valve
- ½" NPS Inlets w/ 3/8" OD flexible copper tubing
- 0.5 GPM aerator installed, 1.5 GPM aerator included
- Single lever handle
- Color coded index
- Chrome plated finish

Model 12-510L

Replacement Parts

п	Ropidcomoni i and	
ı	Model	Description
	21-340L	Single Lever Ceramic Valve Repair Kit
	21-341	Single Lever Ceramic Valve Handle
	21-198L	1/2" x 3/8" Braided Supply Hoses
ı	12-512	Pop-Up Drain (fits 12-510L)

For aerator options see page 45

4" Center Deck Mount Single Lever Faucet with Pop-Up Drain

- Ceramic cartridge valve
- 1/2" NPS Inlets w/ 3/8" OD flexible copper tubing
- 0.5 GPM aerator installed, 1.5 GPM aerator included
- Single lever handle
- Color coded index · Chrome plated finish





Replacement Parts

Model	Description
21-340L	Single Lever Ceramic Valve Repair Kit
21-341	Single Lever Ceramic Valve Handle
21-198L	1/2" x 3/8" Braided Supply Hoses

For aerator options see page 45



New

Kitchen Faucet with Sprayer

- Ceramic cartridge valve with metal stem
- Pre-installed 3/8" compression water lines
- 1.8 GPM aerator installed
- Single lever handle
- Chrome plated brass

Replacement Parts

Faucets

13-816L

13-818L

Model

Model	Description	
16-352L	Sprayer Only	
21-344L	Replacement Single Lever Valve	
21-195L	13" Replacement Water Line Kit	

8" Center Deck Mount Faucet

¼ Turn ceramic valves

16-351L

- 1/2" NPS male inlets on 8" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction

Kitchen Faucet Only (No Sprayer)

- Lever handles
- Chrome plated finish



6" Swing Spout
8" Swing Spout
10" Swing Spout
12" Swing Spout
14" Swing Spout

16" Swing Spout

18" Jointed Spout

Spout Size

13-824L 24" Jointed Spout 13-801L 6" Wide Gooseneck Spout 13-802L 8-1/2" Wide Gooseneck Spout 13-8XXL No Spout - Body Only

Replacement Parts

Model	Description
21-300L	1/4 Turn Ceramic Valve Kit
21-198L	1/2" x 3/8" Braided Supply Hoses

For aerator and spout options see pages 45 & 64

Single Hole Deck Mount **Pantry Faucet**

- Single hole, single temp
- ¼ Turn ceramic valves
- 1/2" NPS male inlet
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handle
- · Chrome plated finish



г	a	U	С	ei	rs

Model	Spout Size
16-108L	6" Swing Spout
16-109L	12" Swing Spout
16-115L	3-1/2" Wide Gooseneck Spout (0.5 GPM)
16-116L	6" Wide Gooseneck Spout

Replacement Parts

Model	Description
21-300L	1/4 Turn Ceramic Valve Kit

For aerator and spout options see pages 45 & 64



Service Sink Faucet with Cast Spout

- Flanges with eccentric fittings for quick installations
- Includes wall bracket for spout support
- ¼ Turn ceramic valves
- ½" NPT male inlets on 8" centers
- 6-1/2" heavy cast spout with pail hook and hose thread
- Mounting kit included
- Solid rough chrome brass base

Faucet		
Model	Spout Size	Case Qty.
16-281	Service Sink Faucet with Lever Handles	12







Vacuum Breaker Pail Hook & Hose Threads

Integral Stops

Replacement Parts

Description
Cold 1/4 Turn Ceramic Cartridge Valve
Hot 1/4 Turn Ceramic Cartridge Valve
Replacement Wall Bracket for 16-281
Vacuum Breaker Repair Kit
Wrist Blade Handle Kit
E-Z Install Flexible Water Line Kit



Floor Mop Sink

- MS-2424 Bowl Size: 21" x 21" x 9"
- MS-1818 Bowl Size: 15" x 15" x 9"
- 3-1/2" drain w/ 2" IPS outlet
- 18 gauge stainless steel
- Mounting hardware included

Model	Overall Size	
MS-2424	24" x 24" x 13"	
MS-1818	18" x 18" x 13"	

Replacement Parts

Model Description 23-145 Replacement Drain

Mop Hangers

- Stainless steel construction with spring action grips
- MH-24 size: 23"L x 4-1/2"H
- MH-5 size: 5"L x 4-1/2"H
- MH-5 includes 30" rubber hose with 3/4" garden hose inlet





4" Center Deck Mount Laundry Tub Faucet

- ¼ Turn ceramic cartridge valves
- 1/2" NPS male inlets on 4" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double o-ring construction
- Lever handles
- Chrome plated finish

I	Model	Spout Size
l	11-406L	6" Swing Spout
l	11-450L	6" Swing Spout with Garden Hose Adapter

Replacement Parts for Silver Series Plumbing



Silver Series 1/4 Turn Ceramic Valve Repair Kit (10-4, 11-4, 13-8 Series)

- Fits all 10-4, 11-4, and 13-8 series faucets
- Includes (1) hot and (1) cold ceramic valve set with handles
- Fully assembled, easy to install

Model 21-300L



Silver Series Compression Valve Repair Kit

(Old Style 10-4, 11-4, 13-8 Series)

- Fits old style 10-4, 11-4, and 13-8 series faucets
- Includes (1) hot and (1) cold compression valve set with handles
- Fully assembled, easy to install

Model 21-325L



Silver Series 1/4 Turn Ceramic Valve Repair Kit (12-8 Series)

- Fits all 12-8 series faucets
- Includes (1) hot and (1) cold ceramic valve set with handles
- Fully assembled, easy to install

Model 21-310L



Silver Series **Compression Valve** Repair Kit (Old Style 12-8 Series)

- Fits old style 12-8 series
- Includes (1) hot and (1) cold compression valve set with handles
- Fully assembled, easy to install

Model 21-355L



Silver Series Lever Handle Kit

- Fits all Krowne faucets
- Lever style
- Contains (2) screws. (2) handles, and hot & cold indicator
- Solid chrome plated brass

Model 21-305



Silver Series Wrist Blade Handle Kit

- Fits all Silver Series faucets
- 4" length
- Contains (2) screws. (2) handles. and hot & cold indicator
- Solid chrome plated brass

Model 21-312



Silver Series **Coupling Flanges**

- Fits 12-8 Silver Series 8" center wall mount faucet
- 1/2" NPT female inlet
- Two rubber washers

Model 21-400L



Replacement Washer Set

- 12 pcs. per set
- Fits Silver Series coupling flanges

Model 20-302

Swing Spouts

 Fits Krowne Silver Series Faucets



Gooseneck & Jointed Spouts



Model	Spout Size	Height	Flow Rate
19-226L	18" Jointed Spout	-	1.8 GPM
19-227L	3-1/2"W Gooseneck	7-1/4"	0.5 GPM
19-228L	6"W Gooseneck	8-1/2"	1.8 GPM
19-229L	8-1/2"W Gooseneck	10"	1.8 GPM




New

Rotary Twist Waste Valves

Features apply to all Rotary Twist Waste Valves

- Premium stainless steel ball valve design engineered for long-lasting performance
- Elimination of traditional rubber gasket to prevent leaks and withstand harsh conditions and chemicals
- Smooth, ¼ turn action for ease-of-use
- Overall lower maintenance costs due to ball valve design
- Universal 2" NPS male threaded drain outlet and 1-1/2" female threaded drain outlet







Stainless Steel Ball Valve shown halfway open



Stainless Steel Ball Valve shown open



Stainless Steel Rotary Twist Waste Valve

- Fits 3-1/2" sink opening
- 1-1/4" overflow outlet with cap
- Stainless steel body

Model 22-850

- Stainless steel ball valve
- Includes vandal resistant screw for strainer
- Approximately 2-3 times the drain rate of a conventional lever waste drain



Short Handle Stainless Steel **Rotary Twist Waste Valve**

- Fits 3-1/2" sink opening
- 1-1/4" overflow outlet with cap
- Stainless steel body
- Shorter handle length
- Stainless steel ball valve
- Includes vandal resistant screw for strainer
- Approximately 2-3 times the drain rate of a conventional lever waste drain

Model





Nickel Plated Cast Bronze Rotary Twist Waste Valve

- Fits 3-1/2" sink opening
- 1-1/4" overflow outlet with cap
- Nickel plated cast bronze body
- Stainless steel ball valve
- Includes vandal resistant screw for strainer
- Approximately 2-3 times the drain rate of a conventional lever waste drain

22-800

Replacement Parts for Rotary Twist Waste Valves

Model

22-508 Repair Kit - Rubber & PVC Gaskets

22-509 Replacement Overflow Cap

Description 22-532 Handle Replacement for 22-850 22-533 Short Handle Replacement for 22-851 22-534 Handle Replacement for 22-800

Waste Valves

3-1/2" Twist Waste Valve

- Fits 3-1/2" sink opening
- 2" NPS Male Threaded / 1-1/2" Female Threaded Drain Outlet
- 1-1/4" overflow outlet
- Stainless steel strainer, flange and handle

Model Case Qty. 22-204 12









- Threaded Drain Outlet
- 1-1/4" overflow outlet
- Stainless steel strainer, flange and handle

Model Case Qty. 22-404 12



- Threaded Drain Outlet
- 1-1/4" overflow outlet
- Stainless steel strainer, flange and handle

Case Qty. 22-201 12



- Fits 3-1/2" sink opening
- 2" NPS Male Threaded / 1-1/2" Female Threaded Drain Outlet
- 1-1/4" overflow outlet
- Stainless steel strainer, flange and handle

Model 22-404-S



3-1/2" Twist Waste Valve with Short 6" Handle

- Fits 3-1/2" sink opening
- 2" NPS Male Threaded / 1-1/2" Female Threaded Drain Outlet
- 1-1/4" overflow outlet
- Stainless steel strainer, flange and handle

Model 22-204-S





Waste Valve Installation Tool for Twist & Lever Waste Drains

- Fits most brands
- Heavy Duty

Model 22-540



Waste Drain Replacement Parts & Accessories

Twist Waste Drain Kit

- Includes 3-1/2" Twist Waste Drain (22-204), Overflow Head (22-500) & Overflow Elbow (22-501)
- 2" NPS Male Threaded / 1-1/2" Female Threaded drain outlet
- Fits 3-1/2" sink opening
- 1-1/4" overflow outlet
- Stainless steel strainer, flange and handle

Model 22-507





Optional Overflow Head and Elbow

- 2" cut-out in sink required for overflow head
- Interchangeable with most brands
- Reinforced spray head
- Full repair kits available

Model	Description
22-500	Overflow Head
22-501	Overflow Elbow
22-504	Head & Overflow Kit

Replacement Face Strainer

Fits all manufacturers



Model	Description
22-516	Fits 3" Sink Opening
22-616	Fits 3-1/2" Sink Opening

Replacement Face Flange

- Fits all manufacturers
- Stainless Steel construction



Model	Description
22-515	Fits 3" Sink Opening
22-615	Fits 3-1/2" Sink Opening

Replacement Stopper



- O-ring creates watertight seal
- Fits most brands

Model	Description
22-530	Complete Stopper
22-519	O-Ring Only

Replacement Overflow Cap

- Fits all twist and rotary waste drains
- Nickel Plated Brass



Model 22-505

Reducer

- Converts 2" NPS fitting on all waste drains to 1-1/2" NPS male
- Nickel plated brass
- Fits all twist and rotary waste drains



Lever Handle Assembly



Model 22-528

Twist Handle Assembly



Model 22-529

Twist & Lever Drain Repair Kit

- Fits most brands
- Fits all waste drains

22-502



3-1/2" Stainless Steel Drains




23-123

23-130

Standard Kitchen Sink Drain

- For 3-1/2" sink opening
- 4-1/2" top diameter
- 1-1/2" NPS male
- Locknut and washer included
- Stainless steel with metal post
- Used on all kitchen sinks



Stainless Steel Sink Strainer

- Stainless steel construction
- Fits 3-1/2" 4" sink openings
- 4-1/2" flange
- Deep basket for added capacity
- Brass nut on bottom



Fixed Metal Post Basket

- Fits 3-1/2" kitchen drains
- Fits Krowne drain models 23-123 and 23-130

Model 23-153



Movable Metal Post Basket

- Fits 3-1/2" kitchen drains
- Fits Krowne drain models 23-123 and 23-130

23-138



Strainer Basket

- Fits 3-1/2" kitchen drains
- Does not stop water flow

Model 23-159

1-1/2" Stainless Steel Drains



Model 23-121

1-1/2" Full Flange Stainless Steel Drain

- For 1-1/2" sink opening
- 2-1/2" top diameter
- 1-1/2" NPT male
- Locknut and washer included
- Used on Krowne "HS" hand sinks



Replacement **Basket**

- Fits 1-1/2" stainless steel drains
- Fits Krowne drain models 23-121 and 23-122



Model 23-122

1-1/2" Cut Flange Stainless Steel Drain

- For 1-1/2" sink opening with small
- 2-1/2" top diameter
- 1-1/2" NPT male
- Locknut and washer included
- Fits all Krowne sinks 2017 and prior
- Fits all manufacturers



1" Plastic Drain with Metal Locknut

- Fits 1-3/8" opening
- 1" NPS male thread, 2" flange size
- 1-1/2" long
- Locknut and washer included

Model 23-111-A

Heavy Cast Drains



23-110

1/2" Nickel Plated **Brass Drain**

- Fits 15/16" opening
- 1/2" NPS male thread
- 1-1/8" flange size
- 1-1/2" long
- Locknut and washer included



Model

23-111

Brass Drain

- Fits 1-3/8" opening
- 1" NPS male thread

1" Nickel Plated

- 2" flange size
- 1-1/2" long
- Locknut and washer included



Model 23-120

1-1/4" Slanted **Top Drain** (Krowne 1997 to 2016)

- For 1-1/4" sink and ice bin openings
- Tapered top
- 1" NPT male thread
- Locknut and washer included
- Uses 23-155 overflow

Overflow Pipes



Most Popular

1-1/2" Metal **Overflow Pipe for Bar Sinks**

- 1-1/2" Overflow Pipe
- Fits most manufacturers

Model 23-156

Fits 1-1/2" Drains







Universal Stainless Overflow Pipe for Bar Sinks

- Fits all 1", 1-1/4" and 1-1/2" Drains
- Heavy Duty Rubber Grommet

Model Case Qty. 23-151 12











Universal Plastic Overflow Pipe for Bar Sinks

- Fits all 1", 1-1/4" and 1-1/2" Drains
- Heavy Duty Rubber Grommet

Case Qty. 23-150 12

Fits 1", 1-1/4" and 1-1/2" Drains



23-111





23-121

23-120



1-1/4" Metal **Overflow Pipe for Bar Sinks**

- 1-1/4" Overflow Pipe
- Fits old style Krowne slanted top drains

Model 23-155

Fits 1-1/4" Slanted Top Drains





1" Metal Overflow Pipe for Bar Sinks

- 1" Overflow Pipe
- Fits 1" Drains

Model 23-154

Fits 1" Drain





16" Wide Hand Sinks

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)

16" Hand Sink

- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain



Model	Overall Size	Bowl	Weight
HS-2L	16"W x 15"D x 14"H	6" Deep	13

16" with Royal **Series Faucet**

- Includes Royal Series Faucet with 1/4 turn ceramic cartridge valves
- 1-1/2" Drain

21-308L (cold) and 21-309L (hot) replacement valves



16" with **Side Support Brackets**

- Side support brackets on
- 10-435L faucet with 1/4 turn ceramic valves



Weight Model **HS-10** 16"W x 15"D x 20"H 6" Deep 16

16" with Wrist Blades Handles

- 10-435L-W faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain



Model	Overall Size	Bowl	Weight
HS-43	16"W x 15"D x 14"H	6" Deep	14

16" with Overflow **Drain & P-Trap**

- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- Overflow drain and P-Trap included
- 1-1/2" Drain
- · Weight: 16 lbs.





14-1/2" Wide with Deck Mount Faucet


- 11-435L deck mount faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain



Model	Overall Size	Bowl	Weight
HS-18	14-1/2"W x 16-1/2"D x 14"H	6" Deep	13

REPLACEMENT PARTS & ACCESSORIES







1/4 Turn Ceramic Valves



1-1/2" Drain (Locknut and Washer Included)



E-Z Install Flexible Water Line Kit

16" Wide with Side Splashes

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)

16" with Side Splashes

- 7-3/4"H Side Splashes
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- Weight: 15 lbs.



Model Overall Size Bowl **HS-26L** 16"W x 15"D x 14"H 6" Deep

16" with **Right Side Splash**

- 7-3/4"H Side Splash on right side
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- Weight: 14 lbs.

Model Overall Size **HS-2-RS** 16"W x 15"D x 14"H 6" Deep

16" with Left Side Splash

- 7-3/4"H Side Splash on left side
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- Weight: 14 lbs.



Overall Size Model **HS-2-LS** 16"W x 15"D x 14"H 6" Deep

16" with Side Splashes & P-Trap

- 7-3/4"H Side Splashes
- P-Trap
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain

• Weight: 15 lbs.

Overall Size Model HS-5 16"W x 15"D x 24"H 6" Deep



16" with Side Splashes **Less Faucet**

- 7-3/4"H Side Splashes
- 4" Center Faucet Holes
- No faucet included
- 1-1/2" Drain
- Weight: 11 lbs.

Model Overall Size **HS-26-LF** 16"W x 15"D x 14"H 6" Deep

REPLACEMENT PARTS & ACCESSORIES



4" Center Faucet with 4-1/2" Double Bend Spout



1/4 Turn Ceramic Valves



1-1/2" Drain (Locknut and Washer Included)



E-Z Install Flexible Water Line Kit

16" Wide with Electronic Faucet

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)

16" with 4" Center **Electronic Sensor Faucet**

- 16"W x 15"D x 14"H
- 6" Deep Bowl
- 16-670 electronic sensor faucet (2.2 GPM)
- 1-1/2" Drain

Model	Features	Weight
HS-67	No Side Splashes	18
HS-68	With Side Splashes	21



16" with Single Hole **Electronic Sensor Faucet**

- 16"W x 15"D x 14"H
- 6" Deep Bowl
- 16-675 electronic sensor faucet (1.0 GPM)

Model	Features	Weight	
HS-69	No Side Splashes		
HS-70	With Side Splashes	19	



16" with Single Hole **Electronic Sensor Faucet**

- 16-190 electronic sensor faucet (2.2 GPM)
- 1-1/2" Drain
- Weight: 14 lbs.



Model	Overall Size	Bowl
HS-1	1 16"W x 15"D x 14"H	6" Deep

16" with Single Hole **Electronic Sensor** Faucet, Overflow & P-Trap

- 16-190 electronic sensor faucet (2.2 GPM)
- Includes Overflow & P-Trap
- 1-1/2" Drain
- Weight 15 lbs.

Model Overall Size HS-12 16"W x 15"D x 14"H 6" Deep

16" with Single Hole **Electronic Sensor** Faucet, Overflow & P-Trap, and Soap & **Towel Dispenser**

- 16-190 electronic sensor faucet (2.2 GPM)
- Includes Overflow & P-Trap
- Built-in Soap & Towel Dispenser
- 1-1/2" Drain



REPLACEMENT PARTS & ACCESSORIES FOR HAND SINKS WITH ELECTRONIC FAUCETS





1-1/2" Drain (Locknut and Washer Included)



16" Wide with Soap & Towel

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)

16" with Overflow & P-Trap and Soap & **Towel Dispenser**

- 16"W x 15"D x 24"H
- 6" Deep Bowl
- Includes Overflow & P-Trap
- Built-in Soap & Towel Dispenser
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain

Model	Features	Weight
HS-7	No Side Splashes	35
HS-33	With Side Splashes	38



16" with Stainless Steel Skirt, Overflow & P-Trap and Soap & **Towel Dispenser**

- Stainless Steel Skirt
- Includes Overflow & P-Trap
- Built-in Soap & Towel Dispenser
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- Weight 35 lbs.

Overall Size 16"W x 15"D x 24"H 6" Deep



16" with Side Supports, Overflow & P-Trap and Soap & Towel Dispenser

- Two Side Supports on each side
- Includes Overflow & P-Trap
- Built-in Soap & Towel Dispenser
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- · Weight 35 lbs.

Overall Size **HS-58** 16"W x 15"D x 24"H 6" Deep



16" with Soap & **Towel Dispenser**

- Built-in Soap & Towel Dispenser
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- · Weight 35 lbs.

Overall Size HS-56 16"W x 15"D x 24"H 6" Deep

REPLACEMENT PARTS & ACCESSORIES



4" Center Faucet with 4-1/2" Double Bend Spout



1/4 Turn Ceramic Valves



1-1/2" Drain (Locknut and Washer Included)



E-Z Install Flexible Water Line Kit

16" Wide with Knee Pedal Valve

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)

16" with Knee Pedal Valve

 Knee pedal faucet w/ built-in flow control on hot and cold valves



■ 1-1/2" Drain

Weight: 26 lbs.



Overall Size Model **HS-15** 16"W x 15"D x 19-1/2"H 6" Deep

16" with Knee Pedal Valve & Side Splashes

 Knee pedal faucet w/ built-in flow control on hot and cold valves



- 16-140L faucet (1.8 GPM)
- 1-1/2" Drain
- Weight 26 lbs.

Overall Size Model **HS-41** 16"W x 15"D x 19-1/2"H 6" Deep



with built-in flow control on hot and cold valves



- 16-140L faucet (1.8 GPM)
- 1-1/2" Drain
- Weight 36 lbs.



16" Wide Pedestal with Foot Valve

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)



16" Pedestal with Foot Valve

- 16"W x 15"D x 42"H
- 6" Deep Bowl
- Foot pedal faucet with built-in flow control on hot and cold valves
- Deck mount soap dispenser (only included on model HS-14)
- 16-140L faucet (1.8 GPM)
- 1-1/2" Drain

Model	Features	Weight
HS-14	No Side Splashes	35
HS-40	With Side Splashes	38



16" Pedestal with Foot Valve and Soap & Towel Dispenser

- 16"W x 15"D x 42"H
- 6" Deep Bowl
- Foot pedal faucet with built-in flow control on hot and cold valves
- HS-39 has Deck Mount Soap Dispenser
- HS-42 has Wall Mount Soap Dispenser
- 16-140L faucet (1.8 GPM)
- 1-1/2" Drain

Model	Features	Weight
HS-39	No Side Splashes	50
HS-42	With Side Splashes	53

REPLACEMENT PARTS & ACCESSORIES









16" Wide Less Faucet

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)



16" with 4" Center Faucet Holes Less Faucet

- 4" Center Faucet Holes
- No faucet included
- 16"W x 15"D x 14"H overall size
- 6" Deep Bowl
- 1-1/2" Drain
- Weight: 11 lbs.



16" with Single Faucet Hole Less Faucet

- Single Faucet Hole
- No faucet included
- 16"W x 15"D x 14"H overall size
- 6" Deep Bowl
- 1-1/2" Drain
- Weight: 11 lbs.

Model HS-2-LF



HS-11-LF



16" with 8" Center Faucet Holes Less Faucet

- 8" Center Faucet Holes
- No faucet included

HS-20-LF

- 16"W x 15"D x 14"H overall size
- 6" Deep Bowl
- 3-1/2" Drain
- Weight: 11 lbs.



14-1/2" Wide with 4" Center Deck Faucet **Holes Less Faucet**

- 4" Center Deck Faucet Holes
- No faucet included
- 14-1/2"W x 16-1/2"D x 14"H overall size Weight: 11 lbs.
- 6" Deep Bowl
- 1-1/2" Drain

Model

HS-18-LF

REPLACEMENT PARTS & ACCESSORIES





1/4 Turn Ceramic Valves



1-1/2" Drain (Locknut and Washer Included)



E-Z Install Flexible Water Line Kit

12" Wide Hand Sinks

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)

12" Hand Sink

- 12"W x 17"D x 14"H
- 6" Deep Bowl.
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- · Weight 12 lbs.

HS-9L



12" with **Royal Series Faucet**

- 12"W x 17"D x 14"H
- 6" Deep Bowl
- Faucet with 1/4 turn ceramic cartridge valves
- 1-1/2" Drain
- Weight 15 lbs.

HS-21



12" Wide with Side Splashes

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)



12" with Side Splashes

- 7-3/4"H Side Splashes
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- Weight 15 lbs.

Overall Size HS-30L 12"W x 17"D x 14"H 6" Deep



12" with Right Side Splash

- 7-3/4"H Side Splash on right side
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- · Weight 14 lbs.

HS-9-RS 12"W x 17"D x 14"H 6" Deep



12" with Left Side Splash

- 7-3/4"H Side Splash on left side
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- Weight 14 lbs.

Model **Overall Size** Bowl **HS-9-LS** 12"W x 17"D x 14"H 6" Deep

REPLACEMENT PARTS & ACCESSORIES



4" Center Faucet with 4-1/2" Double Bend Spout



1/4 Turn Ceramic Valves



1-1/2" Drain (Locknut and Washer Included)



E-Z Install Flexible Water Line Kit

12" Wide with Electronic Faucet

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)

12" with 4" Center **Electronic Sensor Faucet**

- 16-670 electronic sensor faucet (2.2 GPM)
- 1-1/2" Drain • Weight 17 lbs.





12" with 4" Center **Electronic Sensor** Faucet & Side Splashes

- 7-3/4"H Side Splashes
- 16-670 electronic sensor faucet (2.2 GPM)
- 1-1/2" Drain
- Weight 17 lbs.

Model Overall Size HS-65 12"W x 17"D x 14"H 6" Deep



12" Wide Less Faucet

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)



12" with 4" Center **Faucet Holes**

- 12"W x 17"D x 14"H
- 6" Deep Bowl
- 4" Center Faucet Holes
- 1-1/2" Drain
- Weight 11 lbs.

Model HS-9-LF



12" with Single **Faucet Hole**

- 12"W x 17"D x 14"H
- 6" Deep Bowl
- Single Faucet Hole
- 1-1/2" Drain
- Weight 11 lbs.

Model HS-9S-LF



12" with 4" Center Faucet Holes & Side Splashes

- 12"W x 17"D x 14"H
- 6" Deep Bowl
- 4" Center Faucet Holes
- 7-3/4"H Side Splashes
- 1-1/2" Drain
- Weight 13 lbs.

Model HS-30-LF

REPLACEMENT PARTS & ACCESSORIES



4" Center Faucet with 4-1/2" Double Bend Spout



4" Center Electronic Sensor Faucet



1-1/2" Drain (Locknut and Washer Included)



1/4 Turn Ceramic Valves

12" Wide Hand Sinks with Soap & Towel

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)



12" with Soap & Towel Dispenser and Overflow & P-Trap

- Includes Overflow & P-Trap
- Built-in Soap & Towel Dispenser
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- · Weight 30 lbs.

Overall Size HS-31 12"W x 17"D x 24"H 6" Deep



12" with Soap & Towel Dispenser, Overflow & P-Trap, and Side Splashes

- 7-3/4"H Side Splashes
- Includes Overflow & P-Trap
- Built-in Soap & Towel Dispenser
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- · Weight 35 lbs.

HS-32 12"W x 17"D x 24"H 6" Deep



12" with Soap & Towel Dispenser, Overflow & P-Trap, and Stainless Steel Skirt

- Includes Overflow & P-Trap
- Built-in Soap & Towel Dispenser
- Stainless Steel Skirt
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- · Weight 33 lbs.

Overall Size **HS-37** 12"W x 17"D x 24"H 6" Deep

REPLACEMENT PARTS & ACCESSORIES



4" Center Faucet with 4-1/2" Double Bend Spout



1/4 Turn Ceramic Valves



and Washer Included)



E-Z Install Flexible Water Line Kit

9" Wide Space Saver Hand Sinks

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)

9" MiniMax Hand Sink

- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- Weight 14 lbs.

Overall Size Model **HS-1** 9"W x 12"D x 13"H 6" Deep



9" MiniMax Hand Sink with Side Splashes

- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- Weight 14 lbs.

Overall Size Model Bowl HS-19 9"W x 12"D x 13"H 6" Deep



9" Wide Space Saver Hand Sinks with Electronic Faucet

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)

9" MiniMax with 4" Center **Electronic Sensor Faucet**

- 16-670 electronic sensor faucet (2.2 GPM)
- 1-1/2" Drain
- Weight 17 lbs

Overall Size **HS-61** 9"W x 12"D x 13"H 6" Deep

Optional AC Adapter: 16-199



- 7-3/4"H Side Splashes
- 16-670 electronic sensor faucet (2.2 GPM)
- 1-1/2" Drain
- Weight 17 lbs

Overall Size Bowl **HS-62** 9"W x 12"D x 13"H

Optional AC Adapter: 16-199







4-1/2" Double Bend Spout



4" Center Electronic Sensor Faucet



1-1/2" Drain (Locknut and Washer Included)



1/4 Turn Ceramic Valves

ADA Compliant Hand Sinks

All ADA Compliant Hand Sinks include a faucet, wall bracket & two side supports.





4" Center Deck Mount With Wrist Blades

- 4" Center Deck Mount Faucet with 6" Double Bend Spout (1.8 GPM)
- Deck Mount Soap Dispenser
- 1-1/2" Drain
- Weight 24 lbs.

Overall Size Model Bowl **HS-50** 20"W x 24"D x 16"H 5" Deep



Single Hole Hands Free **Electronic Faucet**

- 16-650 Electronic Faucet with 6" Gooseneck Spout (2.2 GPM)
- Deck Mount Soap Dispenser
- 1-1/2" Drain
- Weight 24 lbs.

Overall Size Model **HS-51** 20"W x 24"D x 16"H 5" Deep



8" Center Deck Mount With Wrist Blades

- 8" Center Deck Mount Faucet with 6" Double Bend Spout (1.8 GPM)
- 1-1/2" Drain
- · Weight 26 lbs.

Overall Size Model Bowl **HS-53** 20"W x 24"D x 16"H 5" Deep

Specialty Hand Sinks

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)





16" Hands Free Faucet Wand

- Faucet with push back activation
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- Weight 14 lbs.

Overall Size Model Bowl **HS-34** 16"W x 15"D x 14"H 6" Deep



12" Eyewash Station

- Eye wash included (16-232L)
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- Weight 15 lbs.

Overall Size Model **HS-35** 12"W x 17"D x 14"H 6" Deep



16" Eyewash Station

- Eye wash included (16-232L)
- 10-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain
- · Weight 15 lbs.

Overall Size Model Bowl **HS-36** 16"W x 15"D x 14"H 6" Deep

REPLACEMENT PARTS & ACCESSORIES



4" Center Faucet with 4-1/2" Double Bend Spout



1/4 Turn Ceramic Valves



1-1/2" Drain (Locknut and Washer Included)



E-Z Install Flexible Water Line Kit

Hand Sink Parts & Accessories



Automatic Wall Mount Soap/Sanitizer Dispenser

For Liquid Soap or Sanitizer

- Touch-free sensor
- Mounting screws included
- Safety lock with key
- Refillable soap container with site window
- Uses 4 C Batteries (not included)



H-121



Automatic Wall Mount Foam Soap Dispenser

For Foam Soap

- Touch-free sensor
- Mounting screws included
- Safety lock with key
- Refillable soap container with site window
- Uses 4 C Batteries (not included)



H-122



Manual Wall Mount Soap/Sanitizer Dispenser

For Liquid Soap or Sanitizer

- Mounting screws included
- Safety lock with key
- Refillable soap container with site window



H-145



Soap Dispenser Drip Tray

- For Wall Mount Automatic Liquid Soap/Sanitizer and Foam Soap Dispensers (H-121 and H-122)
- Adhesive backing



H-160



Soap Dispenser Countertop Stand

- For Wall Mount Automatic Liquid Soap/ Sanitizer and Foam Soap Dispensers (H-121 and H-122)
- Can be used with H-160 Soap Dispenser Drip Tray





Soap Dispenser Floor Stand

- For Wall Mount Automatic Liquid Soap/Sanitizer and Foam Soap Dispensers (H-121 and H-122)
- Recommended pairing the H-160 Soap Dispenser Drip Tray with this item




Model



Soap & Towel Dispenser Combo

Uses 7-1/2" x 11-3/4" tri-fold paper towels



Soap & Towel Dispenser mounts above hand sink







Soap Dispensers

Description
Wall Mount Soap Dispenser (30 oz)
Deck Mount Soap Dispenser 13 oz. (Fits 1-1/8" opening)



Towel Dispensers

- Wall Mount
- 11"W x 15"H x 4"D
- Uses tri-fold paper towels

Model H-105

Hand Sink Parts & Accessories



Single Pedal Valves

- Built-in flow control on hot and cold valves
- Self closing valve
- Repair kit available
- Built-in check valves
- Adjust temperature by using flow control valves
- Mounting screws not included
- Repair Kit for 1 Hot or Cold Valve available (Model 21-302L)

Description 16-407L

Single Pedal Foot Valve 16-406L Single Pedal Knee Valve



Double Pedal Valves

- Self closing valve
- Repair kit available
- Color-coded knee pedals
- 4-1/2" hole centers
- Mounting screws not included
- Repair Kit for 1 Hot or Cold Valve available (Model 21-302L)

Model	Description	
16-120L	Double Pedal Foot Valve	
16-121L	Double Pedal Knee Valve	

Field Installed Side Splashes

- Fits hand sinks with 15" front to back depth
- Easy to install in the field
- Does not require screws
- Pre-applied industrial strength double-sided tape
- Silicone sealant included

Model Splash Location SG-L2 Left Side SG-R2 Right Side

SG-LR2 Left & Right Side



Factory Installed Side Splashes

- Fits hand sinks with 15" front to back depth
- Spot welded to side of hand sink

 Sealed with silicone to meet local health code requirements







- Factory installed
- Sink not included

Model	Description
H-108-2	16"W x 15"D
H-108-9	12"W x 17"D
H-108-1	9"W x 12"D



Spout-Mount Eyewash

- Fits all spouts
- Hand sink & faucet not included

Model 16-232L





Side Support **Brackets**

For added strength

Model H-110



Model **WB-1715** 16"W **WB-1712** 12"W



Hands-Free Spout Valve

- Spring loaded for automatic closure
- Dual position for continuous flow
- Simple screw-on installation

Model 21-451



Replacement Wall **Mount Faucet**

- 4" center wall mount
- 1/4 turn ceramic valves
- 4-1/2" Double Bend Spout

10-435L



Handle Repair Kits





21-300L

Model Description 21-300L Faucet Repair Kit Wrist Handle Kit



■ 1-1/2" IPS

Model H-100

Overflow Assembly

 Includes hose, clamps & overflow inlet

Model 23-157





- Fits 1-1/2" sink opening
- 1-1/2" NPS male

Model 23-121

Locknut & washer included







Model Description 21-443L E-Z Install Flexible Water Line Kit 21-198L 1/2" x 3/8" Braided Supply Hoses

One Compartment Drop-In Sinks

All Krowne Drop-In Hand Sinks include Faucet & Drain (unless specified)

15" x 15" Overall **Drop-In Sink**

- 15" x 15" overall
- 12"W x 10"D x 5-3/16" Deep Bowl
- Cutout: 14-3/8" x 14-3/8
- 11-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain

Model Weight HS-1515 8 lbs.



13" x 17-1/2" Overall **Drop-In Sink**

- 13" x 17-1/2" overall
- 11"W x 13-1/2"D x 6-3/8" Deep Bowl
- Cutout: 11-1/2" x 16"
- 11-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" Drain

Weight Model HS-1317 8 lbs.



20-1/4" x 17" Overall **Drop-In Sink**

- 20-1/4" x 17" overall
- 17-3/4"W x 12-3/4"D x 7-1/2" Deep bowl
- Cutout: 18-1/4" x 15-1/2"
- 11-460L faucet with 1/4 turn ceramic valves (1.8 GPM)
- 1-1/2" Drain

Model Weight HS-2017 8 lbs.



- 10" x 16" overall
- 8"W x 12"D x 10" Deep bowl
- 11-460L faucet with 1/4 turn ceramic valves (1.8 GPM)
- 3-1/2" Drain

Model Description HS-1016 No Side Splashes HS-1025 With Side Splashes



12" x 18" Overall **Drop-In Sinks**

- HS-1419: 10"W x 14"D x 10" Deep bowl
- HS-1425: 10"W x 14"D x 5" Deep bowl
- Cutout: 10-1/2" x 16-3/4"
- 11-460L faucet with 1/4 turn ceramic valves (1.8 GPM)
- 3-1/2" Drain

Model Description **HS-1419** 10" Deep Bowl **HS-1425** 5" Deep Bowl



HS-1419

12" x 18" Overall with Side Splashes

- HS-1220 bowl size: 10"W x 14"D x 10" Deep
- HS-1225 bowl size: 10"W x 14"D x 5" Deep
- Cutout: 10-1/2" x 16-3/4"
- 5-1/2"H Splashes
- 11-460L faucet with 1/4 turn ceramic valves (1.8 GPM)
- 3-1/2" Drain

Model Description **HS-1220** 10" Deep Bowl **HS-1225** 5" Deep Bowl



REPLACEMENT PARTS & ACCESSORIES



4" Center Faucet with 6" Double Bend Spout



4" Center Faucet with 4-1/2" Double Bend Spout



1/4 Turn Ceramic Valves



1-1/2" Drain (Locknut and Washer Included)



3-1/2" Drain (Locknut and Washer Included)



1/2" x 3/8" **Braided Supply**



Multiple Compartment Drop-In Sinks



- 10"W x 14"D x 10" deep bowls
- Faucet with 1/4 turn ceramic valves, 1.8 GPM Faucet only included on models HS-2619 (8" spout) and HS-3819 (12" spout)
- 3-1/2" drains in each bowl

Model	Bowls	Faucet	Overall Size	Cutout	Wgt.
HS-2619	2	Included	26" x 18"	22-1/4" x 16-3/4"	30
HS-2619-LF	2	No Faucet	26" x 18"	22-1/4" x 16-3/4"	30
HS-3819	3	Included	36" x 18"	34-1/4" x 16-3/4"	45
HS-3819-LF	3	No Faucet	36" x 18"	34-1/4" x 16-3/4"	45

New

Scullery Sinks

- Bowl Size: 18"W x 18"L x 13"D
- 3-1/2" Drain included
- 18 gauge stainless steel sink
- 304 stainless steel legs with plastic bullet feet
- 12-808L faucet with 1/4 turn ceramic valves, 1.8 GPM (included on BS-1818)

Model	Description
BS-1818	Includes Faucet
BS-1818-LF	Less Faucet



Replacement Drain

3-1/2" Drain Fits Multi-Compartment Drop-In Sinks or Scullery Sinks



Model 23-123 Locknut and Washer Included

Specialty Sinks on Legs

Specialty Sinks include Faucet & Drain (unless specified)



- 10"W x 14"D x 7" deep bowl
- 10-406L faucet with 1/4 turn ceramic valves (1.8 GPM)
- 1-1/2" drain
- Weight: 40 lbs.

Model	Width	Depth	Wgt.
18-1C	12"	18-1/2"	33



Convenience Store Sinks

- 19" front to back x 36" working height
- 3-1/2" basket drains
- 10-410L faucet with 1/4 turn ceramic valves (1.8 GPM)
- 10"W x 14"D x 10"H bowl

Model	Width	Drainboard	Wgt.
CS-1836	36"	-	69
CS-1860	60"	(2) 12" ea.	85
CS-1872	72"	(2) 18" ea.	95



Sinks with Soap & **Towel Dispensers**

- 10"W x 14"D x 6" deep bowl
- Built-in soap & towel dispenser
- 10-406L faucet with 1/4 turn ceramic valves (1.8 GPM)
- 1-1/2" drain

Model	Width	Depth	Wgt.
18-12DST	12"	23-1/2"	50
18-18ST	18"	18-1/2"	46

Drop-In Counter Top Installed Hand Sink

- Bowl: 10"W x 14"D x 5"H Deep
- Counter top installed
- Front access Towel Dispenser
- Deck Mounted Soap Dispenser
- Faucet included
- Two models available: one with 4"H backsplash and one with 8"H backsplash



Model	Backsplash	Bowl
HS-74	4"H	5" Deep
HS-78	8"H	5" Deep

Sink Strainers



Dish Table Sink **Strainer**

- Stainless Steel Pre-Rinse Drain
- 18 gauge Stainless Steel
- Fits 20" x 20" Bowl
- 4" Deep

Model 30-150



10" x 14" Stainless Steel Sink Strainer

- 5" deep stainless steel
- Fits all 10" x 14" sink bowls
- Used on Bar Sinks, Dump Sinks, and 18" Blender Stations

Model 30-152



10" x 14" Plastic Sink Strainer

- 6" deep durable clear plastic
- Fits all 10" x 14" sink bowls
- Used on all Bar Sinks. Dump Sinks, and Blender Stations

Model 30-160





10" x 12" Stainless Steel Sink Strainer

- 5" deep stainless steel
- Fits all 10" x 12" sink bowls
- Used on Bar Sinks, Dump Sinks, and Blender Stations

Model 30-153

Floor Strainers



8-1/2" Plastic Kitchen Floor Drain Strainer

- Fits in kitchen floor drain
- 8-1/2" x 8-1/2" x 3" overall
- Drains from bottom and sides
- Prevents drain blockage
- Easy to remove and clean

Model 30-148



11-3/4" Plastic Floor **Drain Strainer**

- Fits into standard floor drain
- 8" x 8" bowl
- 11-3/4" x 11-3/4" overall
- Also fits bar sink bowls
- Easy to remove and clean

Model 30-141



6-1/2" Plastic Floor **Drain Strainer**

- Fits into floor drain
- 6-1/2" x 6-1/2" x 3" overall
- Prevents drain blockage
- Easy to remove and clean

Model 30-145



8-1/2" Plastic Floor **Drain Strainer**

- Fits in kitchen floor drain
- 8-1/2" x 8-1/2" x 2" overall
- Prevents drain blockage
- Easy to remove and clean

Model 30-147

Gas Connectors

Krowne Gas Connectors have built a solid reputation for their durability and design. Any gas connector you purchase from Krowne comes with a lifetime guarantee. We 100% ensure our product's quality and longevity.





PVC Protective Coating

With antimicrobial agent for easy cleaning.

Radial Wrap -

Heavy duty stainless steel radial wrap prevents hose from stretching.

Corrugated Tubing

Stainless steel corrugated tubing built to be flexible for ease of installation.

Welded Construction

360° heavy duty welds on both ends increases durability.

Rotational Ends

360° rotational ends provide versatility and ease during installation.

Gas Connector Parts & Accessories



One-Handed Quick Disconnect

w/ 10-Point 360° Locking System Quickly and easily disconnect hose to move equipment for cleaning and maintenance.



SwivelKing™

Durable stainless steel construction with dual 360° rotation significantly reduces stress and extends life of



Restraining Kit

Comes pre-cut 12" shorter than overall length of hose to prevent hose from being pulled too far. Easily disconnects for cleaning and maintenance.



Caster Positioning Chocks

Creates a home position for movable kitchen equipment. Stainless steel construction eliminates cracking commonly seen with plastic caster positioning sets.



Full Port Ball Valve

Required by code to allow for manual gas shutoff within 5 ft. of appliance.



Black Malleable Street 90° Elbows

Allows for versatility in tight conditions during installation.

Complete Kit

Includes:

- Gas Connector
- Quick Disconnect
- Shut-off Valve
- Restraining Cable Kit
- (2) 90° Elbows



Case Quantities

Select Complete Kits are available in case quantities of 6.

Model	Interior Size	Length	BTU/hr*	Case Qty.
M5024K	1/2"	24"	87K	-
M5036K	1/2"	36"	77K	6
M5048K	1/2"	48"	68K	-
M5060K	1/2"	60"	60K	6
M5072K	1/2"	72"	55K	-
M7524K	3/4""	24"	232K	6
M7536K	3/4"	36"	218K	6
M7548K	3/4"	48"	180K	6
M7560K	3/4"	60"	158K	6
M7572K	3/4"	72"	139K	6
M10024K	1"	24"	414K	-
M10036K	1"	36"	379K	6
M10048K	1"	48"	334K	6
M10060K	1"	60"	294K	6
M10072K	1"	72"	279K	-
M12524K	1-1/4"	24"	699K	-
M12536K	1-1/4"	36"	615K	-
M12548K	1-1/4"	48"	541K	-
M12560K	1-1/4"	60"	476K	-
M12572K	1-1/4"	72"	419K	-

*Minimum Flow Capacity

(0.64 Sp. Gr., 1000 BTU/ft3 Natural Gas at 0.5" wc pressure drop)

Complete Kit with One SwivelKing™

Includes:

- Gas Connector
- Quick Disconnect
- Shut-off Valve
- Restraining Cable Kit
- (2) 90° Elbows
- SwivelKing™



Model	Interior Size	Length	BTU/hr*
M5024K9	1/2"	24"	87K
M5036K9	1/2"	36"	77K
M5048K9	1/2"	48"	68K
M5060K9	1/2"	60"	60K
M5072K9	1/2"	72"	55K
M7524K9	3/4"	24"	232K
M7536K9	3/4"	36"	218K
M7548K9	3/4"	48"	180K
M7560K9	3/4"	60"	158K
M7572K9	3/4"	72"	139K
M10024K9	1"	24"	414K
M10036K9	1"	36"	379K
M10048K9	1"	48"	334K
M10060K9	1"	60"	294K
M10072K9	1"	72"	279K
M12524K9	1-1/4"	24"	699K
M12536K9	1-1/4"	36"	615K
M12548K9	1-1/4"	48"	541K
M12560K9	1-1/4"	60"	476K
M12572K9	1-1/4"	72"	419K

 $^{\star}\text{Minimum}$ Flow Capacity (0.64 Sp. Gr., 1000 BTU/ft3 Natural Gas at 0.5" wc pressure drop)

Complete Kit with Two SwivelKings™

Includes:

- Gas Connector
- Quick Disconnect
- Shut-off Valve
- Restraining Cable Kit
- (2) 90° Elbows
- (2) SwivelKings™



Model	Interior Size	Length	BTU/hr*
M5024K10	1/2"	24"	87K
M5036K10	1/2"	36"	77K
M5048K10	1/2"	48"	68K
M5060K10	1/2"	60"	60K
M5072K10	1/2"	72"	55K
M7524K10	3/4"	24"	232K
M7536K10	3/4"	36"	218K
M7548K10	3/4"	48"	180K
M7560K10	3/4"	60"	158K
M7572K10	3/4"	72"	139K
M10024K10	1"	24"	414K
M10036K10	1"	36"	379K
M10048K10	1"	48"	334K
M10060K10	1"	60"	294K
M10072K10	1"	72"	279K
M12524K10	1-1/4"	24"	699K
M12536K10	1-1/4"	36"	615K
M12548K10	1-1/4"	48"	541K
M12560K10	1-1/4"	60"	476K
M12572K10	1-1/4"	72"	419K

*Minimum Flow Capacity

(0.64 Sp. Gr., 1000 BTU/ft3 Natural Gas at 0.5" wc pressure drop)

Complete Kit with Two SwivelKings™ & Caster Positioning Chocks

Includes:

- Gas Connector
- Quick Disconnect
- Shut-off Valve
- Restraining Cable Kit
- (2) 90° Elbows
- (2) SwivelKings™
- Caster Positioning Chocks



Model	Interior Size	Length	BTU/hr*
M5024K12	1/2"	24"	87K
M5036K12	1/2"	36"	77K
M5048K12	1/2"	48"	68K
M5060K12	1/2"	60"	60K
M5072K12	1/2"	72"	55K
M7524K12	3/4"	24"	232K
M7536K12	3/4"	36"	218K
M7548K12	3/4"	48"	180K
M7560K12	3/4"	60"	158K
M7572K12	3/4"	72"	139K
M10024K12	1"	24"	414K
M10036K12	1"	36"	379K
M10048K12	1"	48"	334K
M10060K12	1"	60"	294K
M10072K12	1"	72"	279K
M12524K12	1-1/4"	24"	699K
M12536K12	1-1/4"	36"	615K
M12548K12	1-1/4"	48"	541K
M12560K12	1-1/4"	60"	476K
M12572K12	1-1/4"	72"	419K

 $^{*}\mbox{Minimum Flow Capacity}$ (0.64 Sp. Gr., 1000 BTU/ft3 Natural Gas at 0.5" wc pressure drop)

Gas Connector with Quick Disconnect & Restraining Cable Kit

Includes:

- Gas Connector
- Quick Disconnect
- Restraining Cable Kit



Model	Interior Size	Length	BTU/hr*
M5024K2	1/2"	24"	87K
M5036K2	1/2"	36"	77K
M5048K2	1/2"	48"	68K
M5060K2	1/2"	60"	60K
M5072K2	1/2"	72"	55K
M7524K2	3/4"	24"	232K
M7536K2	3/4"	36"	218K
M7548K2	3/4"	48"	180K
M7560K2	3/4"	60"	158K
M7572K2	3/4"	72"	139K
M10024K2	1"	24"	414K
M10036K2	1"	36"	379K
M10048K2	1"	48"	334K
M10060K2	1"	60"	294K
M10072K2	1"	72"	279K
M12524K2	1-1/4"	24"	699K
M12536K2	1-1/4"	36"	615K
M12548K2	1-1/4"	48"	541K
M12560K2	1-1/4"	60"	476K
M12572K2	1-1/4"	72"	419K

*Minimum Flow Capacity

(0.64 Sp. Gr., 1000 BTU/ft3 Natural Gas at 0.5" wc pressure drop)

Gas Connector with Quick Disconnect

Includes:

- Gas Connector
- Quick Disconnect



Model	Interior Size	Length	BTU/hr*
M5024K5	1/2"	24"	87K
M5036K5	1/2"	36"	77K
M5048K5	1/2"	48"	68K
M5060K5	1/2"	60"	60K
M5072K5	1/2"	72"	55K
M7524K5	3/4"	24"	232K
M7536K5	3/4"	36"	218K
M7548K5	3/4"	48"	180K
M7560K5	3/4"	60"	158K
M7572K5	3/4"	72"	139K
M10024K5	1"	24"	414K
M10036K5	1"	36"	379K
M10048K5	1"	48"	334K
M10060K5	1"	60"	294K
M10072K5	1"	72"	279K
M12524K5	1-1/4"	24"	699K
M12536K5	1-1/4"	36"	615K
M12548K5	1-1/4"	48"	541K
M12560K5	1-1/4"	60"	476K
M12572K5	1-1/4"	72"	419K

*Minimum Flow Capacity (0.64 Sp. Gr., 1000 BTU/ft3 Natural Gas at 0.5" wc pressure drop)

Complete Kit For Canada

Includes:

- Gas Connector
- Quick Disconnect
- Shut-off Valve
- Restraining Cable Kit
- (2) 90° Elbows with Nipples

Case Quantity: 6



Model	Interior Size	Length	BTU/hr*
C5024K	1/2"	24"	87K
C5036K	1/2"	36"	77K
C5048K	1/2"	48"	68K
C5060K	1/2"	60"	60K
C5072K	1/2"	72"	55K
C7524K	3/4"	24"	232K
C7536K	3/4"	36"	218K
C7548K	3/4"	48"	180K
C7560K	3/4"	60"	158K
C7572K	3/4"	72"	139K
C10024K	1"	24"	414K
C10036K	1"	36"	379K
C10048K	1"	48"	334K
C10060K	1"	60"	294K
C10072K	1"	72"	279K
C12524K	1-1/4"	24"	699K
C12536K	1-1/4"	36"	615K
C12548K	1-1/4"	48"	541K
C12560K	1-1/4"	60"	476K
C12572K	1-1/4"	72"	419K

*Minimum Flow Capacity (0.64 Sp. Gr., 1000 BTU/ft3 Natural Gas at 0.5" wc pressure drop)

Gas Connector Hose Only

Includes:

Gas Connector



Model	Interior Size	Length	BTU/hr*
M5024	1/2"	24"	87K
M5036	1/2"	36"	77K
M5048	1/2"	48"	68K
M5060	1/2"	60"	60K
M5072	1/2"	72"	55K
M7524	3/4"	24"	232K
M7536	3/4"	36"	218K
M7548	3/4"	48"	180K
M7560	3/4"	60"	158K
M7572	3/4"	72"	139K
M10024	1"	24"	414K
M10036	1"	36"	379K
M10048	1"	48"	334K
M10060	1"	60"	294K
M10072	1"	72"	279K
M12524	1-1/4"	24"	699K
M12536	1-1/4"	36"	615K
M12548	1-1/4"	48"	541K
M12560	1-1/4"	60"	476K
M12572	1-1/4"	72"	419K

*Minimum Flow Capacity (0.64 Sp. Gr., 1000 BTU/ft3 Natural Gas at 0.5" wc pressure drop)

Gas Connector Parts & Accessories



SwivelKing[™] Connector

- Allows gas hose to swivel in tight areas
- Reduces stress on the hose from bending
- Full gas flow with no restriction
- 360° full rotation
- Female NPT x Male NPT

Model	Fits
SW50	Fits 1/2" Gas Connectors
SW75	Fits 3/4" Gas Connectors
SW100	Fits 1" Gas Connectors
SW125	Fits 1-1/4" Gas Connectors



SwivelKing installed on a gas connector.



Quick Disconnect

 Allow for easy disconnect to move equipment for maintenance and cleaning

Model	Size
QD50	Fits 1/2" Connectors
QD75	Fits 3/4" Connectors
QD100	Fits 1" Connectors
QD125	Fits 1-1/4" Connectors



Restraining Cable Kit

- Restraining kit will be 12" shorter than hose length
- Mounting hardware included

Model	Size
R24	Used with 24" Connectors
R36	Used with 36" Connectors
R48	Used with 48" Connectors
R60	Used with 60" Connectors
R72	Used with 72" Connectors



Full Port Ball Valve

 Required by code to allow manual gas shutoff within 5 ft. of appliance

Model	Size	
G50	1/2" Female NPT Ball Valve	
G75	3/4" Female NPT Ball Valve	
G100	1" Female NPT Ball Valve	
G125	1-1/4" Female NPT Ball Valve	



Black Malleable Street 90° Elbows

Model	Size	
E50	1/2" Female x Male NPT	
E75	3/4" Female x Male NPT	
E100	1" Female x Male NPT	
E125	1-1/4" Female x Male NPT	



Black Malleable 90° Elbows with Nipples

Model	Size
C50	(2) 1/2" Elbows, (2) 1/2" Nipples
C75	(2) 3/4" Elbows, (2) 3/4" Nipples
C100	(2) 1" Elbows, (2) 1" Nipples
C125	(2) 1-1/4" Elbows, (2) 1-1/4" Nipples



Black Malleable Reducing Bushing

- Converts gas equipment w/ 1/2" inlet to use 3/4" gas connector for higher BTU flow
- 3/4" Male x 1/2" Female NPT

Model	Size
RB7550	3/4" x 1/2" Bushing

Gas Connector Parts & Accessories



Rear Caster Positioning Chocks

- Creates a home position for all movable kitchen equipment
- Ensures kitchen equipment is returned back to the proper location in relation to fire suppression and ventilation systems after removal for cleaning and maintenance
- Can be used with all caster-mounted equipment
- Fits all caster sizes
- Includes (2) rear chocks and mounting hardware
- Meets NFPA Codes 17A (5.64) & 96 (12.1.3) related to fire suppression systems
- Case quantity: 12 per

Model	Description	Case Qty.
28-200	Rear Caster Positioning Chocks	12



Rear Caster Chock creates a home position for caster-mounted kitchen equipment.



Front Caster Positioning Chocks

- Requires our 28-200 Rear Caster Chocks, cannot be used independently
- Creates a home position for all movable kitchen equipment
- Ensures kitchen equipment is returned back to the proper location in relation to fire suppression and ventilation systems after removal for cleaning and maintenance
- Can be used with all caster-mounted equipment
- Fits all caster sizes
- Includes (2) front chocks and mounting hardware

Model	Description		
28-201	Front Caster Positioning Chocks		



New



Designed to work with our 28-200 Rear Caster Chocks.

Gas Appliance Regulators

- Used on Foodservice kitchen equipment
- · High strength aluminum casting
- RL50 & RL75 are set @ 10.0" W.C. with 5.0-12.0 spring installed
- RG50 & RG75 are set @ 3.5" W.C. with 3.0-6.0 spring installed





Stationary Gas Connector

- Use for Stationary Commercial Gas cooking equipment
- Stainless Steel with PVC **Antimicrobial Coating**

1/2" Models Coming Soon
1/2" Models Coming Soon

*Flow Rating 0.64 Sp. Gr. at 0.5" wc pressure drop



Model	Interior Size	Length	BTU/hr*
S5036	1/2"	36"	120K
S5048	1/2"	48"	106K
S7536	3/4"	36"	256K
S7548	3/4"	48"	225K



Grease Filters

All Krowne Grease Filters are UL listed (UL 1046 & ULC-S649) and are intended to be used with restaurant-type cooking equipment installed in accordance with ANSI/NFPA 96, "Ventilation Control and Fire Protection of Commercial Cooking Operations," the "International Mechanical Code," "International Fire Code," "ANSI/NFPA 1, "Fire Code," or the "Uniform Mechanical Code."

Royal Series Grease Filters

- Rounded Baffles are easier to clean, stronger, and allow for more efficient air flow
- Heavy Duty gauge stainless steel
- All filters are 2" deep
- Dishwasher safe
- Built-in handles for easy install and removal
- Fully interchangeable with existing filters

Model	Construction	Size
RS1616	Stainless Steel	16"H x 16"W
RS1620	Stainless Steel	16"H x 20"W
RS1625	Stainless Steel	16"H x 25"W
RS2020	Stainless Steel	20"H x 20"W
RS2025	Stainless Steel	20"H x 25"W
RS2520	Stainless Steel	25"H x 20"W



NOTE:

- Must order in complete cases (multiples of six)
- Cannot mix and match sizes



Silver Series Grease Filters

- All filters are 2" deep
- Built-in handles for easy install and removal
- Fully interchangeable with existing filters

NOTE:

- Must order in complete cases (multiples of six)
- Cannot mix and match sizes



Model	Construction	Size
A1616	Aluminum	16"H x 16"W
A1620	Aluminum	16"H x 20"W
A1625	Aluminum	16"H x 25"W
A2016	Aluminum	20"H x 16"W
A2020	Aluminum	20"H x 20"W
A2025	Aluminum	20"H x 25"W
A2520	Aluminum	25"H x 20"W

Model	Construction	Size
G1616	Galvanized Steel	16"H x 16"W
G1620	Galvanized Steel	16"H x 20"W
G1625	Galvanized Steel	16"H x 25"W
G2016	Galvanized Steel	20"H x 16"W
G2020	Galvanized Steel	20"H x 20"W
G2025	Galvanized Steel	20"H x 25"W
G2520	Galvanized Steel	25"H x 20"W

Model	Construction	Size
S1020	Stainless Steel	10"H x 20"W
S1616	Stainless Steel	16"H x 16"W
S1620	Stainless Steel	16"H x 20"W
S1625	Stainless Steel	16"H x 25"W
S2016	Stainless Steel	20"H x 16"W
S2020	Stainless Steel	20"H x 20"W
S2025	Stainless Steel	20"H x 25"W
S2520	Stainless Steel	25"H x 20"W



Hydrosift[™] Water Filters

Krowne's Hydrosift™ Water Filters are the premier foodservice water filtration solution. Our bacteriostatic filters diminishes limescale, reduces chlorine/chloramine, and eliminates bad tastes and odor. The result is a clean and safe water ready to serve to your customers.



KR-HS3-KIT shown fully assembled.



Triple Filter Assembly Kit

- Includes triple filter assembly with mounting bracket, (2) cartridge filters, (1) sediment cartridge filter, (3) male to male nipple fittings, male to female ball valve, reducing bushing, female tee fitting, pressure gauge and filter wrench
- 3/4" NPT water in and out connections
- 8.0 GPM max flow rate
- 20,000 gallon capacity
- 20-100 PSI non-shock working pressure (1.38-6.89 bar)
- 35° 160°F operating temperature

Model KR-HS3-KIT



Twin Filter Assembly Kit

- Includes twin filter assembly with mounting bracket, (1) cartridge filter, (1) sediment cartridge filter, (2) male to male nipple fittings, male to female ball valve, reducing bushing, female tee fitting, pressure gauge and filter wrench
- 3/4" NPT water in and out connections
- 2.5 GPM max flow rate
- 15,000 gallon capacity
- 20-100 PSI non-shock working pressure (1.38-6.89 bar)
- 35° 160°F operating temperature

Model KR-HS2-KIT



Single Filter Assembly Kit

- Includes single filter assembly with mounting bracket, (1) cartridge filter, (1) male to male nipple fitting, male to female ball valve, reducing bushing, female tee fitting, pressure gauge and filter wrench
- 3/4" NPT water in and out connections
- 2.5 GPM max flow rate
- 10,000 gallon capacity
- 20-100 PSI non-shock working pressure (1.38-6.89 bar)
- 35° 160°F operating temperature

Model KR-HS1-KIT

Single Assembly with Filter Cartridge

- Includes single filter assembly with bracket, (1) cartridge filter
- 3/4" NPT water in and out connections
- 2.5 GPM max flow rate
- 10,000 gallon capacity
- 20-100 PSI non-shock working pressure (1.38-6.89 bar)
- 35° 160°F operating temp

Model KR-HSA





Filter Cartridge

- Bacteriostatic filter
- Diminishes limescale, reduces chlorine/ chloramine, and eliminates bad taste & odor
- For use in Single, Twin and Triple Filter Assemblies

KR-FC



Sediment Filter Cartridge

- Reduces sediment and silt
- For use in Twin and Triple Filter Assemblies

Model KR-SF

Wok Faucets





Heavy Duty 3/8" Male Inlet Wok Range Faucet with 13-3/4" Spout

- 3/8" NPT male inlet
- Automatically turns on when spout is swung over wok

Faucet

wodei	Case Qty.
Model	Case Qty.

Replacement Parts

Model	Description
21-640L	O-Ring Repair Kit
21-643L	Replacement Aerator





3/8" Wok Range Faucet

- 3/8" NPT male inlet
- Automatically turns on when spout is swung over wok

Faucets

Model	Spout Size	Case Qty.
13-222L	12" Swing	20
13-223L	14" Swing	20
13-225L	17" Swing	20

Replacement Parts

Model	Description
21-561L	Repair Kit
21-565L	Replacement Aerator



Heavy Duty Wall Mount Extended Wok Range Faucet

- Heavy Duty
- 10" Swing Spout
- 8 1/4" extension from wall
- 1/2" NPT male inlet
- 1/4 turn ceramic cartridge valve
- Replacement Parts Available

Faucet

Model Spout Size
16-240L 10" Swing

Replacement Parts

ModelDescription21-620LRoyal Series Valve
Repair Kit with Handle22-611LReplacement Aerator

SILVER —SERIES—



Wall Mount Extended Wok Range Faucets

- Commercial Series
- 8 1/4" Extension from Wall
- 1/2" NPT male inlet
- Replacement Parts Available

Faucets

1 doccis	
Model	Spout Size
12-170L	10" Swing
12-171L	12" Swing

Replacement Parts

Ropidcomon rano	
Model	Description
21-600L	Silver Series Valve Repair Kit with Handle
22-611L	Replacement Aerator

Wok Faucet Replacement Parts



Royal Series O-Ring Repair Kit

Fits Royal Series Wok Faucets

Model 21-640L



Royal Series Valve for Extended Range Faucets

- Fits Royal Series Wok Faucets
- Includes Wrist Blade handle

Model 21-620L



Replacement Aerator

• Fits Royal Series Wok Faucets

Model 21-643L



Silver Series Wok Faucet Repair Kit

- Fits Silver Series Wok Faucets
- Includes Green T, Spring, 2 O-Rings, and Brass Plunger

Model 21-561L



Silver Series Valve for Extended Range Faucets

• Fits Silver Series Wok Faucets

Model 21-600L



Replacement Aerators

- Fits Royal Series Extended Wok Faucets
- Fits Silver Series Wok Faucets

 Model
 Flow Rate

 21-565L
 1.95 GPM

 22-611L
 2.20 GPM

Specialty Utility Spray

Utility Spray with Add-On Faucet

- Wall Mount
- 8" Centers
- 12" Spout
- 96" Hose
- Built-in Check Valves
- Wall Mounting kit
- 1/4 turn ceramic cartridge valves

Model 19-112L





96" Hose with Grip

Model 21-136L



Utility Sprays

8" Center Wall Mount Utility Spray

- 1/2" NPT female inlets on 8" adjustable centers
- 72" long Stainless Steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included

19-108L



Single Wall Mount Utility Spray

■ 1/2" NPT female inlet

72" long Stainless Steel flexible hose

 Plastic coated wall hook with chrome plated base

- Vacuum breaker
- Built-in check valves
- Mounting kit included

Model 19-101L



Deck Mount Utility Spray

- 1-1/8" OD x 2-1/2" shank
- Fits in 1 1/4"Hole
- 72" long Stainless Steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included

Model 19-201L



4" Center Deck Mount Utility Spray

- 1/2" NPT female inlets on 4" adjustable centers
- 72" long Stainless Steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included

Model 19-204L



8" Center Deck Mount Utility Spray

- 1/2" NPT male inlets on 8" adjustable centers
- 72" long Stainless Steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included

19-208L



Single Deck Mount Utility Spray

- 1/2" NPT male inlets
- 72" long Stainless Steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valve
- Mounting kit included

Model 19-203L



REPLACEMENT PARTS & ACCESSORIES

Angled Pre-Rinse Spray Head

- Interchangeable with most brands
- Reinforced spray head
- Full repair kits available

Model 21-131L



72" Hose with Grip

72"L stainless steel flexible hose

21-135L



Wall Hook

Model 21-144



Pot Fillers

8" Center Wall Mount Pot Filler

■ 1/2" NPT female inlets on 8" adjustable centers

• 72" long Stainless Steel flexible hose

 Plastic coated wall hook with chrome plated base

- Vacuum breaker
- Built-in check valves
- Mounting kit included

Model 20-108L



Most Popular

Single Wall Mount Pot Filler

- 1/2" NPT female inlet
- 72" long Stainless Steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included

Model 20-101L



Deck Mount Pot Filler

- 1-1/8" OD x 2-1/2" shank
- Fits in 1-1/4"Hole
- 72" long Stainless Steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included

Model 20-201L



4" Center Deck Mount Pot Filler

- 1/2" NPT male inlets on 4" adjustable centers
- 72" long Stainless Steel flexible hose Plastic coated wall hook with
- chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included

Model 20-204L



8" Center Deck Mount Pot Filler

- 1/2" NPT female inlets on 8" adjustable centers
- 72" long Stainless Steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included

Model

20-208L



Single Deck Mount Pot Filler

- 1/2" male inlet
- 72" long Stainless Steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included

Model 20-203L



REPLACEMENT PARTS & ACCESSORIES

Pot Filler Spray Head

- Interchangeable with most brands
- Reinforced spray head
- Full repair kits available

21-132L



72" Hose with Grip

 72"L stainless steel flexible hose

Model 21-135L



Wall Hook

- Rubber coated hook
- Mounts to wall





Hose Reels

- Hose Reels extend the reach of a standard pre-rinse unit up to 35'
- Used for a variety of applications such as filling buckets without lifting them from the floor, rinsing down sinks, worktables and floors during clean up, as well as filling steam tables
- 35' hose (3/8' ID) capacity provides water source quickly and conveniently to all areas of the kitchen
- Equipped with a universal mounting bracket so that it can be mounted on the floor, wall, or ceiling; whichever place is more convenient for the environment
- Available in Stainless Steel or Gray Powder Coated finishes.
- Max Operating Pressure: 250 PSI
- Max Operating Temperature: 210°F
- Reel Inlet Connection; 3/8" (F) NPT







Open Stainless Steel Hose Reel with 8" Center **Deck Mount Faucet on** Stainless Steel Wall Plate

- Stainless Steel wall plate included for easy mounting
- 40" overall height, 26" overall width
- 8" raised deck mount faucet
- Replaces T&S Brass* B-1436

Model 24-503



Enclosed Stainless Steel Hose Reel with 8" Center Faucet

- Designed to run water feed outside wall
- 57-1/2" overall height
- 8" center wall mount faucet
- Replaces T&S Brass* B-1433

Model 24-502



Hose Reel Assembly **Replacement Parts**



Model	Description
24-700	35' Hose for Powder Coated Reels
24-702	35' Hose for Stainless Steel Reels
21-126	Angled Pre-Rinse Spray Head with Grip

Test Strips

Chlorine Test Strips

- Sanitizer Test Strips for Bleach-Based Solutions
- 100 strips per bottle
- Color-coded chart
- Test Range: 0-200 ppm



Model	Description
S25-123	1-Pack Loose
P25-123	2-Pack in Header

QAC Test Strips

- Sanitizer Test Strips for QAC-Based Solutions
- 100 strips per bottle
- Color-coded chart
- Test Range: 0-500 ppm



Model	Description
S25-124	1-Pack Loose
P25-124	1-Pack in Header

pH Test Strips

- Test acidity (pH) level in Sushi Rice. Salsa and Salad Dressing
- 50 strips per bottle
- Color-coded chart
- Test Range: 3.0-6.0 pH units



Model	Description
S25-126	1-Pack Loose
P25-126	1-Pack in Header

New

High Range QAC Test Strips

- Used to test solutions that kill pathogenic organisms
- 50 strips per bottle
- Color-coded chart
- Test Range: 0-1500 ppm



Model	Description
S25-127	1-Pack Loose
P25-127	1-Pack in Header

Wobble Wedges®



75-Pack Hard Wobble Wedges®

- Fix anything that wobbles
- Can be stacked
- Great for carpet
- Hard clear plastic wedges

Model 29-160



30-Pack Soft Wobble Wedges®

- Fix anything that wobbles
- Can be stacked
- Can be trimmed
- Great for hard surfaces
- Soft black plastic wedges

Model 29-158

Cooking Accessories



Chrome Oven Knobs

- Easy installation
- Built for durability

_	
Model	Description
25-200S	1 Piece
25-200	Pack of 6





Black Oven Knobs

- Easy installation
- Built for durability

Description 25-201S 1 Piece

Petrol-Gel Food Grade Grease

- Tasteless, odorless
- Non-toxic
- Rated from 15°F to 210°F
- 4 oz. tube

Model Description **\$25-140** 4 oz. Loose Tube P25-140 1 Pack in Header



Refrigeration Accessories



Exhaust Hood Vaporproof Light Fixture

- Meets Code 96 & NEC 410
- Height with globe 9-1/2"H
- Designed for Commercial Cooking Hood
- Maximum 100W Bulb
- Base 5-1/2"D, 3-1/2"H

Model	del Description	
25-103 Shatterproof Plastic Coated Glass Globe with Slanted Base (Replaces FMP® #253-1184)		
25-112	Shatterproof Plastic Coated Globe with Wire Guard & Slanted Base (Replaces FMP® #253-1185)	
25-128 Slanted Base for Exhaust Hood Vaperproof Light Fixture		



Refrigeration Light Fixture

- Die cast aluminum base
- Surface mount
- Maximum 100W Bulb

Model	Description	
25-113	Shatterproof Plastic Coated Glass Globe with Wire Guard & Straight Base (Replaces FMP® #253-1230)	
25-118	Shatterproof Plastic Coated Glass Globe with Straight Base (Replaces FMP® #253-1229)	
25-120	Tempered Glass Globe with Wire Guard & Straight Base (Replaces FMP® #253-1231)	
25-125	25-125 Tempered Glass Globe with Straight Base (Replaces FMP® #253-1228)	
25-129	Straight Base for Refrigeration Light Fixture	



Replacement Globe

- Maximum 100W Bulb
- Rated to 392° F (200°C) for Glass Globes
- 9 pieces per case

Model	Description
25-100	Shatterproof Plastic Coated Globe 3-1/4"D x 6-3/4"H
25-101	Plastic Globe 3-1/4"D x 6-3/4"H
25-102	Tempered Glass Globe 3-1/4"D x 6-3/4"H



Wire Guard for Light Fixtures

- Fits standard 3-1/4"diameter x 6-3/4" high globe
- Zinc plated
- Maximum 100W bulb
- Rated to 392°F (200°C)
- Replaces FMP® #253-1232

25-104







P30-318

Stainless Steel **Snap-In Shelf Support**

- Tab on top
- 7/8" wide

Model	Description
30-317	Zinc Plated, 1 piece
30-317	(Replaces FMP® #135-1240)
30-318	Stainless Steel, 1 piece
30-310	(Replaces FMP® #135-1241)
P30-318	Stainless Steel (pack of 12 pieces)







Coffee Urn Faucets



- Premium brass faucet body and bonnet with chrome finish
- Includes spring, stem and seat cup
- Three color-coded handle options available

Model	Description
19-301	Black for Coffee
19-302	Orange for Decaff
19-303	Red for Hot Water

Fryer Accessories





Stainless Steel Fryer Splash Guards

- Fits most fryers
- Stainless Steel 20.5" x 18"
- Used for preventing the travel of hot oil

Model	Description
30-324	Guard for 1/2" thick fryer walls
30-325	Guard for 1" thick fryer walls



Fryer Cleaning Brush

- For temperatures up to 750°F
- Durable brass bristles
- Angled head for easy cleaning
- No need for oil to cool completely when cleaning

Model 30-330



Fryer Clean Out Rod

- For cleaning clogged fryer drains
- 25" Long
- Stainless Steel
- Can be used on any fryer type

Model 30-335

Food Grade Sprays

Food Grade Grease



- Great for use on food contact equipment such as choppers, slicers, toasters, and conveyor chains
- Protects against oxidation and wear
- 10 oz.

Case Qty. Model 30-200

Food Grade Oil



- Great for use on mixers, conveyors, rollers, slides, paste, and sauce fillers
- Odorless, tasteless, non-toxic, safe on plastic
- 12 oz.

Case Qty. Model 30-201

Food Grade Silicone



- Great for use on refrigerator doors, drawer slides, and food racks
- · High viscosity, safe on plastic, ultra pure, no chlorine
- 9.25 oz.

Case Qty. Model 30-202

Foodservice Accessories

3-Compartment **Bottle Wells** for Ice Bins



- Overall Flange size 16"L x 6-3/4"W
- Fits in any ice bin that is at least 14-1/4" front to back
- Built-in rail for sliding cover
- Raised floor to keep bottles dry

Model	Description
30-550	1 Bottle Well
30-502	2-Pack

Super-Level® Self-Leveling Glide

- Automatically adjusts tables
- 1-1/8" base diameters
- 1/4" 20 thread
- 25 to 140 lbs. load capacity per set of 4



Model 29-162

Bullet Foot

- Plastic bullet foot for 1-5/8" diameter legs
- Fits all Krowne Ice Bins and Underbar Equipment
- Fits most kitchen sinks and worktables



Ice & Water Service Stations



Drop-In Water/Ice Station

- 27" x 20" x 12" overall
- Push-back glass filler included (8" high from deck to spout tip)
- 15-1/2" x 10-1/2" x 10" deep bin with 1" drain
- 1/2" IPS male water inlet
- Heavy Duty stainless steel wire grid

Model	Description
WS-2	Drop-In Water/Ice Station with 8" Glass Filler



Drop-In Water Station

- 12-1/2" x 12-1/2" overall
- Adjustable flow with continuous on position
- Push-back glass filler included (8" high from deck to spout tip)
- 1/2" IPS male water inlet
- 1/2" NPS nickel plated brass drain
- Heavy Duty stainless steel wire grid

Model	Description
WS-1	Drop-In Water Station with 8" Glass Filler



Large Drop-In Ice Bin

- Overall: 27"W x 20"D x 12"H (15" Overall Depth with Cold Plate)
- Cutout: 25-1/4" x 18-1/4"
- 13-1/2" from left side to center drain
- Sliding cover included
- Fully insulated
- 10" deep liner

Model	Description
D2712	Large Drop-In Ice Bin
D2712-7	Large Drop-In Ice Bin with 7-Circuit Cold Plate
D2712-10	Large Drop-In Ice Bin with 10-Circuit Cold Plate
D2712DP	Large Drop-In Ice Bin Deep Style (15" deep liner)



Medium Drop-In Ice Bin

- Overall: 20"W x 15"D x 12"H
- Cutout: 18-1/4" x 13-1/4"
- 10" from left side to center drain
- Sliding cover included
- Fully insulated
- 10" deep liner

Model	Description
D278	Medium Drop-In Ice Bin
D278-7	Medium Drop-In Ice Bin w/ 7-Circuit Cold Plate

Ice & Water Service Station Accessories



New

Deck Mount Pitcher Fillers & Glass Fillers

- Adjustable flow with continuous on position
- Push-back water activation
- Designated height is from deck to spout tip
- 1/2" NPS male inlet
- Fits in 7/8" hole

Model	Description
16-135L	8"H Glass Filler
16-137L	10"H Pitcher Filler
16-138L	12"H Pitcher Filler
16-139L	14"H Pitcher Filler
16-136L	Repair Kit for Glass/Pitcher Filler

Front Mount Dipper Well

- Includes 16-151L faucet with shut-off
- 1" drain
- Stainless Steel
- 10" x 6" overall dimensions
- 1/2" NPT male inlet

Model 16-153L



Drop-In Dipper Well & Faucet

- Fits 6-1/2" hole
- Short length (2-1/2")
- 1-1/2" drain
- Stainless Steel inner and outer can
- Chrome plated brass faucet
- 1/2" NPS inlet

Model	Description
16-149	Dipper Well & Faucet
16-150	Dipper Well Only
16-151L	Faucet Only



Replacement valve (Model 16-147) available for 16-151L.

New

Dipper Well Faucet with Flow Restricter

- 0.25 GPM
- 1/2" NPS Male inlet
- Chrome plated brass faucet
- Fits in 7/8" hole

Model 16-155L



Glass Rinser

- Stainless steel with heavy duty valve
- 4-1/2" disc diameter, fits in 7/8" hole
- 1/2" NPSM thread x 2-1/4" shank
- Includes adapter to fit 3/8" flexible water line
- Replaces all underbar manufacturers rinsers

Model	Description
16-144	Glass Rinser
16-146	Repair Kit





Repair Kit includes Replacement Rod, O-Ring & Spring

Steam Table Faucet

- Fits in 3/4" hole deck mount
- 4-1/4" spout
- 1/2" NPS male inlet
- Ceramic cartridge valve







In-line Pressure Regulator

- Fits all Glass Rinsers
- Lowers water pressure to prevent damage to valve
- Set at 15 20 PSI
- 1/2" Female NPT with 1/2" Male NPT x 3/8" Hose Barb Adapter










Adjustable 6" - 7" Height Universal Plate Caster with Front Brake

- Fits most manufacturers
- 6" to 7" height adjustment
- 3-1/2" x 3-1/2" plate
- 3" grease resistant wheels
- Total lock front brake prevents swivel and locks wheel in place
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

Fits hole patterns: 1-3/4" x 2-3/4" or 2-3/4" x 2-3/4"



Model 28-114S




Heavy Duty Adjustable 6" - 7" Height Universal Plate Caster with Front Brake

- Fits most manufacturers
- 6" to 7" height adjustment
- 3-1/2" x 3-1/2" plate
- 3" grease resistant wheels
- Total lock front brake prevents swivel and locks wheel in place
- Heavy Duty weight capacity 500 lbs. per caster
- Temperature range of 4°F to 176°F
- 4 pieces per set
- Case quantity: 3 per case

Fits hole patterns:

1-3/4" x 2-3/4" or 2-3/4" x 2-3/4"



Model 28-135S



Adjustable 6" - 7" Height 2-3/8" x 3-5/8" Plate Caster with Front Brake

Fits Dean* Fryers

- 6" to 7" height adjustment
- 2-3/8" x 3-5/8" plate
- 3" grease resistant wheels
- Total lock front brake prevents swivel and locks wheel in place
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

Fits hole pattern:



28-160S




Adjustable 8-1/2" - 10-1/2" Height Plate Caster for Fryers

Fits Pitco* Fryers

- 8-1/2" to 10-1/2" height adjustment
- 3-1/2" x 3-1/2" plate
- 3" grease resistant wheels
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

Fits hole patterns: 1-3/4" x 2-3/4" or 2-3/4" x 2-3/4"



28-117S



Adjustable 6" - 7" Height ½"-13 Threaded Stem Caster with Front Brake

Fits True*

- 6" to 7" height adjustment
- 1/2"-13 x 1" threaded stem
- 3" grease resistant wheels
- Total lock front brake prevents swivel and locks wheel in place
- Weight capacity 200 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

Model 28-156S



Adjustable 6" - 7" Height 3/4"-10 Threaded Stem Caster with Front Brake

Fits Garland* & Southbend* Ranges & Ovens

- 6" to 7" height adjustment
- 3/4"-10 x 1" threaded stem
- 3" grease resistant wheels
- Total lock front brake prevents swivel and locks wheel in place
- Weight capacity 200 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

Model 28-158S



1-5/8" Stem Worktable Caster Used on Standard 1-5/8" Diameter Legs

- Fits standard 1-5/8" tubing
- Used on Worktables
- Grease resistant wheels with side brakes
- Weight capacity per caster 28-125S: 220 lbs, 28-129S: 250 lbs.
- Raises height of equipment 1" higher than wheel size
- Temperature range of 14°F to 212°F
- 4 pieces per set
- 28-125S case quantity: 6 per case
- 28-129S case quantity: 4 per case

Model	Height	Wheel Size
28-125S	4" Overall	3" Wheels
28-129S	6" Overall	5" Wheels



1-1/2" Stem Worktable Caster Used on 1-1/2" Diameter Legs

- Fits 1-1/2" tubing
- Used on Worktables
- Grease resistant wheels with side brakes
- Weight capacity 220 lbs. per caster
- Raises height of equipment 1" higher than wheel size
- Temperature range of 14°F to 212°F
- 4 pieces per set
- 28-118S case quantity: 6 per case
- 28-124S case quantity: 4 per case

Model	Height	Wheel Size
28-118S	4" Overall	3" Wheels
28-124\$	6" Overall	5" Wheels




2" Overall Ultra Low Profile Universal Plate Caster, 3-1/2" x 3-1/2"

- Fits most manufacturers
- 3-1/2" x 3-1/2" universal plate
- 1" wheels with front brakes
- Raises height of equipment 2"
- Weight capacity 200 lbs. per caster
- Temperature range of 4°F to 176°F
- 4 pieces per set
- Case quantity: 12 per case

Fits hole patterns:

1-3/4" x 2-3/4" or 2-3/4" x 2-3/4"



Model 28-109S




3" Overall Low Profile Plate Caster, 3-1/2" x 3-1/2"

- Fits most manufacturers
- 3-1/2" x 3-1/2" universal plate
- 2" wheels with side brakes
- Raises height of equipment 3"
- Weight capacity 200 lbs. per caster
- Temperature range of 4°F to 176°F
- 4 pieces per set
- Case quantity: 10 per case

Fits hole patterns: 1-3/4" x 2-3/4" or

2-3/4" x 2-3/4"



Model 28-110S




Universal Plate Casters, 3-1/2" x 3-1/2"

Fits Pitco* Fryers & Most Other Manufacturers

- Fits most manufacturers
- 3-1/2" x 3-1/2" universal plate
- Grease resistant wheels with side brakes
- Raises height of equipment 1" higher than wheel size
- Weight capacity 250 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

Fits hole patterns:

1-3/4" x 2-3/4" or 2-3/4" x 2-3/4"



Model	Height	Wheel Size
28-111S	6" Overall	5" Wheels
28-115S	5" Overall	4" Wheels
28-116S	4" Overall	3" Wheels



Universal Plate Caster, 4" x 4" 3" or 5" Wheel

- 4" x 4" universal plate
- Grease resistant wheels with side brakes
- Raises height of equipment 1" higher than wheel size
- Weight capacity per caster 28-101S: 220 lbs. 28-107S: 250 lbs.
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

Fits hole patterns: 1-3/4" x 2-3/4" or

2-3/4" x 2-3/4"




Model	Height	Wheel Size
28-101S	4" Overall	3" Wheels
28-107S	6" Overall	5" Wheels



6" Overall Heavy Duty Universal Plate Caster, 3-1/2" x 3-1/2" with Front Brake

- Fits most manufacturers
- 3-1/2" x 3-1/2" universal plate
- 5" grease resistant wheels with front brakes
- Raises height of equipment 6"
- Heavy Duty weight capacity 500 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 3 per case

Fits hole patterns: 1-3/4" x 2-3/4" or 2-3/4" x 2-3/4"




Model 28-260S



6" Overall Heavy Duty Universal Plate Caster, 4" x 4"

- 4" x 4" universal plate
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Heavy Duty weight capacity 500 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 3 per case

Fits hole patterns: 1-3/4" x 2-3/4" or 2-3/4" x 2-3/4"



Model 28-120S



6" Overall Plate Caster, 2-3/8" x 3-5/8"

- 2-3/8" x 3-5/8" plate
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Weight capacity 250 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

Fits hole pattern: 1-3/4" x 2-3/4"

Model 28-113S



6" Overall **Universal Wire Shelving Caster**

- Fits standard 1" diameter wire shelving posts
- (2) Allen screws fasten caster
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case



Model 28-151S



6" Overall 1" Square Post Wire Shelving Caster

Fits Amco* Shelving

- Fits 1" square posts
- (2) Allen screws fasten caster
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case



Model 28-172S



6" Overall 1-1/4" Square Post Shelving Caster

Fits Cambro* Camshelving

- Fits 1-1/4" square posts
- (2) Allen screws fasten caster
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 6 per case



Model 28-174S



Heavy Duty Adjustable Height Stem Caster for Single Deck Convection Oven

Fits Vulcan*, Hobart* and Wolf*

- 4" grease resistant wheels
- Raises height of equipment 5" 6-1/4"
- Total lock front brake prevents swivel and locks wheel in place
- Heavy Duty weight capacity 350 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

28-136S



4" Overall M14 x 2.0 Metric Threaded Stem Caster

Fits Atosa* Refrigeration

- M14 Stem Caster, 1" long
- 3" grease resistant wheels with side brakes
- Raises height of equipment 4"
- Fits imported refrigeration
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- Refrigeration units with 3 or more doors require 2 sets
- 4 pieces per set
- Case quantity: 4 per case

Model 28-164S





2" Overall Ultra Low Profile 4" x 5" Plate Caster

Fits True* Refrigeration

- 1" grease resistant wheels with front brakes
- Raises height of equipment 2"
- Weight capacity 200 lbs. per caster
- Refrigeration units with 3 or more doors require 2 sets
- Temperature range of 4°F to 176°F
- 4 pieces per set
- Mounting bolts included
- Case quantity: 10 per case

Fits hole pattern: 2-7/8" x 4"

Model 28-168S





3" Overall Low Profile 4" x 5" Plate Caster

Fits True* Refrigeration

- 2" grease resistant wheels with side brakes
- Raises height of equipment 3"
- Weight capacity 200 lbs. per caster
- Refrigeration units with 3 or more doors require 2 sets
- Temperature range of 4°F to 176°F
- 4 pieces per set
- Mounting bolts included
- Case quantity: 8 per case

Fits hole pattern: 2-7/8" x 4'



Model 28-169S





4" Overall 4" x 5" Plate Caster

Fits True* Refrigeration


- 3" grease resistant wheels with side brakes
- Raises height of equipment 1" higher than wheel size
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Mounting bolts included
- 28-170S case quantity: 4 per case

Fits hole pattern:

2-7/8" x 4'

Model Wheel Size 28-170S 3" Wheels (set of 4) 28-193S 3" Wheels (set of 6)





5" Overall 4" x 5" Plate Caster

Fits True* Refrigeration

- 4" grease resistant wheels with side brakes
- Raises height of equipment 1" higher than wheel size
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Mounting bolts included
- 28-171S case quantity: 4 per case

Fits hole pattern: 2-7/8" x 4"



Model Wheel Size 28-171S 4" Wheels (set of 4) 28-194S 4" Wheels (set of 6)



6" Overall 5/8" and 3/4" Threaded Stem Caster For Ranges and Ovens

- 1" long threaded stem caster
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

Model	Wheel Size
28-145S	5" Wheel, 5/8" - 11 Thread
28-146S	5" Wheel, 3/4" - 10 Thread



6" Overall Heavy Duty Threaded Stem Caster For Griddles, Ranges and Ovens

- Threaded Stem
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Heavy Duty weight capacity 500 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- 28-147S case quantity: 3 per case
- 28-185S case quantity: 4 per case

Model	Wheel Size
28-147S	3/4" - 10 Thread, Fits Garland & Southbend Range Ovens
28-185S	5/8" - 11 Thread, 5" Fits Jade



1/2" - 13 Threaded Stem Caster Threaded for Refrigeration

- 1" long threaded stem
- Grease resistant wheels with side brakes
- Raises height of equipment 1" higher than wheel size
- Temperature range: 4°F to 176°F
- 4 pieces per set
- 28-139S case quantity: 12 per case
- 28-139S case quantity: 6 per case
- 28-139S case quantity: 4 per case
- 28-139S case quantity: 4 per case


Model	Height	Wheel Size	Weight Capacity
28-139S	3" Overall	2" Wheel	200 lbs. per caster
28-140S	4" Overall	3" Wheel	220 lbs. per caster
28-144S	5" Overall	4" Wheel	220 lbs. per caster
28-141S	6" Overall	5" Wheel	220 lbs. per caster



6" Overall Heavy Duty Large Triangle Plate Caster

Fits Blodgett* Convection Ovens

- 5-3/8" x 5-3/8" x 7-1/2" triangle plate caster
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Heavy Duty weight capacity 500 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 3 per case





Model 28-161S



6" Overall Heavy Duty Convection Oven Triangle Plate Caster

Fits Garland *

- 6" x 6" x 7-1/2" triangle plate caster
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Heavy Duty weight capacity 500 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 3 per case




Model 28-166S



7-1/4" Overall Extra Heavy Duty Large Plate Caster

Fits Vulcan* & Hobart* Double Stack Convection Ovens

- 4-1/2" x 4-1/8" plate
- 6" grease resistant wheels
- 2 wheels with side brakes, 2 wheels with no brakes
- Raises height of equipment 7-1/4"
- Extra Heavy Duty weight capacity 750 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 2 per case






6" Overall Sheet Pan Rack Stem Caster for Aluminum Racks

- 5" grease resistant locking wheels with side brakes
- Raises height of equipment 6"
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

Model 28-130S



Need assistance with choosing the correct caster? We got you covered!

Visit krowne.com/crossover

Enter your equipment's model number to pull up the correct caster.

We offer actual size print-outs of our caster plates on krowne.com Simply print and hold it up to your equipment to confirm the match!

Economy Casters

6" Overall 4" x 4" Universal Plate Caster

- Fits most manufacturers
- Universal 4" x 4" plate
- 5" grease resistant wheels
- Weight capacity 200 lbs per caster
- 4 pieces per set (2 w/brake, 2 without)
- Case Quantity: 4 per case



Fits hole patterns: 1-3/4" x 2-3/4" or 2-3/4" x 2-3/4"



30-107S

6" Overall 3-1/2" x 3-1/2" Universal Plate Caster

- Fits most manufacturers
- Universal 3-1/2" x 3-1/2" plate
- 5" grease resistant wheels with 4 side brakes
- Weight capacity 200 lbs per caster
- 4 pieces per set
- Case Quantity: 4 per case



Fits hole patterns: 1-3/4" x 2-3/4" or 2-3/4" x 2-3/4"

30-111S

6" Overall 2-3/8" x 3-5/8" Plate Caster

- 2-3/8" x 3-5/8" plate
- 5" grease resistant wheels
- Weight capacity 200 lbs per caster
- 4 pieces per set (2 w/brake, 2 without)
- Case Quantity: 4 per case



Fits hole pattern



30-113S

30-129S

6" Overall **Universal Wire Shelving Caster**

- Fits standard 1" diameter wire shelving posts
- 5" grease resistant wheels with 4 side brakes
- Weight capacity 200 lbs per caster
- 4 pieces per set
- Case Quantity: 4 per case



6" Overall 1-5/8" Stem Worktable Caster

Used on Standard 1-5/8" Diameter Legs

- Fits standard 1-5/8" tubing
- Used on Worktables
- 5" grease resistant wheels with 4 side brakes
- Weight capacity 200 lbs per caster
- 4 pieces per set
- Case Quantity: 4 per case



6" Overall 1-1/2" Stem Worktable Caster

Used on Standard 1-1/2" Diameter Legs

- Fits 1-1/2" tubing
- Used on Worktables
- 5" grease resistant wheels with 4 side brakes
- Weight capacity 200 lbs per caster
- 4 pieces per set
- Case Quantity: 6 per case



Adjustable 8-1/2" - 10-1/2" Height Plate Caster for Fryers

Fits Pitco* Fryers

- 3-1/2" x 3-1/2" plate
- 3" grease resistant wheels with 4 side brakes
- Weight capacity 200 lbs per caster
- 4 pieces per set
- Case Quantity: 4 per case







6" Overall Heavy Duty Large Triangle Plate Caster

Fits Blodgett* Convection Ovens

- 5-3/8" x 5-3/8" x 7-1/2" triangle plate caster
- 5" Grease resistant wheels
- Heavy Duty weight capacity 500 lbs per caster
- 4 pieces per set (2 w/brake, 2 without)
- Case Quantity: 3 per case





Model

6" Overall 3/4" Threaded Stem Caster For Ranges and Ovens

• 1" long threaded stem

Case Quantity: 4 per case

- 5" grease resistant wheels, 3/4" 10 Thread
- Weight capacity 200 lbs per caster
- 4 pieces per set (2 w/brake, 2 without)



6" Overall Low Profile 1/2" - 13 Threaded Stem Caster Threaded

for Refrigeration

- 1" long threaded stem
- 5" Grease resistant wheels
- Weight capacity 200 lbs per caster
- 4 pieces per set (2 w/brake, 2 without)
- Case Quantity: 4 per case



10-400L-W59	14-812L-W-E4 28	16-108L62	16-331L37	19-229L64
10-435L 59	14-814L28	16-109L62	16-332L37	19-301 104
10-435L-W59	14-816L28	16-115L 62	16-333L 37	19-302 104
11-400L60	14-818L28	16-116L62	16-350L 62	19-303 104
11-400L-W 61	14-824L28	16-120L 84	16-351L62	20-101L 101
11-401L60	14-840L 51	16-121L84	16-352L62	20-108L101
11-406L 60, 63	14-841L51	16-127 33, 63	16-402L56	20-201L101
11-412L60	15-3XXL29	16-127-W33	16-405L56	20-203L101
11-435L60, 85	15-3XXL-W29	16-128 33, 63	16-406L76, 84	20-204L101
11-450L	15-4XXL31	16-129 33, 63	16-407L76, 84	20-208L101
11-460L 60, 85	15-4XXL-W 31	16-130L36	16-450L48	20-302 64
12-8XXL59	15-5XXL30	16-131L36	16-470L51	21-1XXL25
12-170L98	15-5XXL-W30	16-132L36	16-501 56	21-101L24
12-171L98	15-8XXL32	16-133L36	16-505 56	21-108L24
12-510L 61	15-8XXL-W 32	16-135L107	16-506 56	21-109L44
12-525L 61	15-301L29	16-136L107	16-510 56	21-110L
12-801L59	15-301L-W-E4 29	16-137L107	16-511 56	21-112L
12-802L59	15-302L29	16-138L107	16-512 56	21-113L44
12-806L59		16-139L107		
12-808L59	15-306L29, 33		16-513 57 16-514 57	21-114L44 21-115L44
	15-308L29	16-140L36, 76		
12-810L59	15-308L-W-E429	16-141L36	16-51657	21-117L44
12-812L59	15-310L29	16-142L36	16-517 56	21-118L44
12-814L 59	15-312L29	16-143L36	16-649 55	21-125L44
12-816L 59	15-312L-W-E429	16-144107	16-649P55	21-126102
12-818L59	15-314L29	16-146107	16-649P855	21-127L 25
12-824L 59	15-316L29	16-147 107	16-650 55	21-129L25
13-8XXL62	15-325L 29	16-149107	16-650P55	21-130L25
13-222L98	15-325L-W-E229	16-150 107	16-650P855	21-131L25, 99, 100
13-223L 98	15-350L 29, 33	16-151L 107	16-654 54	21-132L25, 101
13-225L 98	15-401L31	16-152L 107	16-654P54	21-133L 25
13-801L 62	15-401L-W-E4 31	16-153L 107	16-654P854	21-134L 25
13-802L 62	15-402L 31	16-155L 107	16-655 55	21-135L25, 100, 101
13-806L 62	15-406L 31	16-160L35	16-656 55	21-136L 25, 99
13-808L 62	15-408L 31	16-161L35	16-670 15, 53	21-137 24
13-810L62	15-408L-W-E4 31	16-162L 35	16-675 15, 53	21-138L25
13-812L 62	15-410L 31	16-163L 35	17-124WL21	21-139L 25
13-814L 62	15-412L 31	16-165 107	17-204WL20	21-140L25
13-816L 62	15-412L-W-E4 31	16-170L 36	17-206WL19	21-141L25
13-818L 62	15-414L31	16-171L 36	17-208WL20	21-142 25
13-824L 62	15-418L 31	16-178L 35	17-310 21	21-143 25
14-4XXL27	15-425L 31	16-179L 35	17-312WL21	21-144 100, 101
14-4XXL-W 27	15-425L-W-E2 31	16-181L35	17-XXXL25	21-14525
14-8XXL28	15-501L30	16-182L 35	18-1C86	21-14825
14-8XXL-W 28	15-501L-W-E4 30	16-186 57	18-12DST 86	21-149L25
14-400L 27	15-502L 30	16-189 57	18-18ST86	21-160-3L22
14-400L-W-E2 27	15-506L 30	16-190 53	18-406L 23	21-160-8L22, 23
14-401L 27	15-508L 30	16-191 53	18-408L 23	21-160-24L24
14-401L-W-E4 27	15-508L-W-E4 30	16-196 54	18-506L23	21-160L24
14-402L 27	15-510L 30	16-196P54	18-508L 23	21-161L24
14-406L 27	15-512L 30	16-196P854	18-606L 23	21-16224
14-406L-W-E4 27	15-512L-W-E4 30	16-197 53	18-608L23	21-16323
14-408L 27	15-514L 30	16-198 56, 74	18-706L 23	21-164L24
14-410L 27	15-516L30	16-199 56, 57	18-708L 23	21-16524
14-410L-W-E4 27	15-525L 30	16-200L37	18-725L 22	21-166L24
14-510L 46	15-525L-W-E2 30	16-201L 37	18-812L 34	21-168 24
14-520L 49	15-601L 34	16-202L 37	18-814L34	21-17024
14-521L 49	15-612L 34	16-203L 37	19-101L 100	21-171 24
14-530L 48	15-625L 34	16-220L 98	19-108L 100	21-179L22, 24
14-546L 50	15-801L32	16-232L 84	19-112L 99	21-181L.21, 22, 23, 25
14-550L 47	15-801L-W-E432	16-240L98	19-201L100	21-184L25
14-560L 48	15-802L32	16-250L35	19-203L 100	21-185L25
14-570L 47	15-806L 32	16-251L35	19-204L 100	21-190L39
14-580L 47	15-808L32	16-252L35	19-208L100	21-191L39
14-801L28	15-808L-W-E432	16-253L35	19-220L64	21-192L39
14-801L-W-E428	15-810L32	16-281 63	19-221L64	21-193L39
14-802L 28	15-812L32	16-282 63	19-222L 64	21-194L39
14-802L-W-E428	15-812L-W-E432	16-28363	19-223L 64	21-195L. 19, 37, 47, 48
14-806L28	15-814L32	16-301L37	19-224L64	21-196L39
14-808L28	15-818L32	16-302L 37	19-225L64	21-198L39, 84
14-808L-W-E4 28	15-825L 32	16-306L37	19-226L 64	21-199L39
14-810L28	15-825L-W-E232	16-312L37	19-227L64	21-201L24
14-812L 28	16-33XL37	16-330L 37	19-228L64	21-202L24
- '				

21-204L 24	21-450L44	22-600L 45	28-110S111	30-550 105
21-208L 24	21-451 84	22-602L 45	28-111S111	A161696
21-227L41	21-452L 42	22-603L 45	28-113S112	A1620 96
21-228L41	21-455L44		28-114S109	A1625 96
		22-604L 45		
21-229L 41	21-458L 34, 41	22-605L 45	28-115S111	A2016 96
21-300L 64	21-460L 34, 41	22-608L 45	28-116S111	A202096
21-302L 24, 25	21-461L 34, 41	22-609L45	28-117S109	A2025 96
21-305 64	21-463L 34, 41	22-610L45	28-118S110	A252096
21-306 40	21-465L 41	22-611L45	28-120S112	BS-181886
21-308L . 18, 20, 21, 40	21-467L41	22-61568	28-124S110	BS-1818-LF86
21-309L . 18, 20, 21, 40	21-469L 41	22-616 68	28-125S 110	C5093
21-310L 64	21-500L43	22-620L 45	28-129S110	C7593
21-311 40, 84	21-524L 44	22-621L 45	28-130S116	C10093
21-312 64	21-525L 43	22-622L 45	28-135S109	C12593
21-313 40, 47	21-527L43	22-625L 45	28-136S113	C5024K92
21-320L43	21-528L43	22-626L45	28-139S115	C5036K92
21-321L 43	21-532L 43	22-628L 45	28-140S115	C5048K92
21-325L 64	21-534L 43	22-631L 45	28-141S115	C5060K92
21-330L 40	21-545L 22, 44	22-632L 45	28-144S115	C5072K92
21-331L 40	21-546L 44	22-633L 45	28-145S115	C7524K92
21-332L 107	21-547L25	22-634L45	28-146S115	C7536K92
21-333L 40	21-561L 98, 99	22-640L45	28-147S115	C7548K92
21-334L40	21-565L 98, 99	22-650L 45	28-151S112	C7560K92
21-340L 61	21-600L98, 99	22-671L 15, 53	28-156S110	C7572K92
21-341 61	21-620L 98, 99	22-672L 15, 53	28-158S110	C10024K92
21-344L47, 62	21-640L98, 99	22-80066	28-160S109	C10036K92
21-345L 37, 46, 49	21-643L 98, 99	22-85066	28-161S115	C10048K92
21-346L 37, 46, 49	21-670 22	22-851 66	28-164S113	C10060K92
21-350L 34, 40	22-201 67	23-110 69	28-166S116	C10072K92
21-351L 34, 40	22-204 67	23-11169	28-168S114	C12524K92
21-355L64	22-404 67	23-111-A69	28-169S114	C12536K92
21-363L 48	22-500 68	23-118 69	28-170S114	C12548K92
21-400L 64	22-501 68	23-120 69	28-171S114	C12560K92
21-401L 42	22-502 68	23-121 69, 84	28-172S113	C12572K92
21-402L 42	22-503 68	23-12269	28-174S113	CS-1836 86
21-403L 42	22-50468	23-123 69, 74	28-180S116	CS-1860 86
		23-130 69	28-185S115	CS-187286
21-404L 41	22-505 68			
21-405L 41	22-507 68	23-138 69	28-193S114	D278106
21-407 42	22-508 66	23-145 33, 63	28-194S114	D278-7106
21-420L 41	22-509 66	23-152 69	28-200 94	D2712 106
21-420L-X 41	22-515 68	23-153 69	28-201 94	D2712-7 106
21-421L41	22-51668	23-15470	28-260S112	D2712-10106
21-421L-X41		23-15570	29-101 105	D2712DP106
	22-51968			
21-422L 41	22-528 68	23-15670	29-108 105	DX-1XX12
21-422L-X 41	22-529 68	23-157 84	29-158 103	DX-3XX13
21-423L 41	22-530 68	23-159 69	29-160 103	DX-4XX13
21-423L-X 41	22-532 66	24-502 102	29-162 105	DX-6XX13
21-424L 41	22-533 66	24-503102	30-107S117	DX-8XX13
21-424L-X41	22-53466	24-600 102	30-111S117	DX-9XX13
21-425L 41	22-540 67	24-602 102	30-1138117	DX-10014
21-425L-X 41	22-572L 45	24-603 102	30-117S117	DX-10811
21-426L 41	22-573L 45	24-700 102	30-125S117	DX-10911
21-427L 41	22-574L 45	24-702 102	30-129S117	DX-12912
21-427L-X41	22-575L 45	25-100 104	30-141 87	DX-13312
21-428L 41	22-576L 45	25-101 104	30-141S117	DX-13712
21-428L-X 41	22-577L 45	25-102 104	30-145 87	DX-138 12
21-429L 41	22-578L 45	25-103 104	30-146S117	DX-139 12
21-429L-X 41	22-579L 45	25-104 104	30-147 87	DX-140 12
21-430L 41	22-580L 45	25-112 104	30-14887	DX-14112
21-430L-X41	22-581L45	25-113104	30-150 87	DX-14912
21-431L 41	22-584L 45	25-118 104	30-151S117	DX-16012
21-431L-X41	22-585L 45	25-120 104	30-152 87	DX-160-2412
21-432L41	22-586L 45	25-125 104	30-153 87	DX-16112
21-432L-X 41	22-587L 45	25-128 104	30-160 87	DX-16212
21-433L 15, 53	22-588L 45	25-129104	30-161S117	DX-16512
21-434L 15, 53	22-589L 45	25-15039	30-317 104	DX-16612
21-440L38	22-591L 45	25-200 103	30-318 104	DX-17112
21-441L 35, 41	22-592L 45	25-200S103	30-324 105	DX-179 12
21-442L35, 41	22-593L 45	25-201S103	30-325 105	DX-20112
21-443L38, 84	22-594L 45	28-101S111	30-330 105	DX-20211
21-444L38	22-598L 45	28-107S111	30-335 105	DX-20812
21-445L 14, 38	22-599L 45	28-109S111	30-502 105	DX-30113
	, 000	,	,	, _,

100.006	DV 200 10		110 1017 05	M75001/ 00	M10ECOVE 01
DX-300	DX-302 13	H-11084	HS-1317 85	M7560K89	M12560K5 91
DX-310	DX-306 13		HS-1419 85		M12560K989
DX-310	DX-308 13	H-11583	HS-1425 85	M7560K591	M12560K1090
DX.312					I .
DX-314					
DX.316					
DX-322	DX-314 13	H-122 83	HS-2619 86	M7560K1290	M12572K89
DX-322	DX-316	H-14583	HS-2619-I F86	M7572 91, 92	M12572K291
DX-325					
DX-400					
DX-401	DX-325 13	H-16283	HS-3819-LF86	M7572K291	M12572K9 89
DX-401	DX-400 13	H-16583	KR-FC	M7572K591	M12572K1090
DX-402					
DX-406					
DX-408	DX-402 13	HS-2L72	KR-HS2-KIT 97	M7572K1090	MH-533, 63
DX-408	DX-406 13	HS-2-I F	KR-HS3-KIT 97	M7572K1290	MH-2433. 63
DX-410					, , , , , , , , , , , , , , , , , , , ,
DX-420					
DX-421		HS-2-RS	KR-SF97	M10024K 89	
DX-421	DX-42014	HS-472	M5024 91. 92	M10024K291	P25-123103
DX-422					
DX-423					
DX-424					I .
DX-424	DX-423 14	HS-8 75	M5024K591	M10024K1090	P25-127103
DX-426			M5024K9 89	M10024K12 90	
DX-426					
DX-430				· · · · · · · · · · · · · · · · · · ·	
DX-430	DX-426 14	HS-9-LS 78	M5024K1290	M10036K89	QD50 93
DX-431			M5036 91 92	M10036K2 91	OD75 93
DX-432					
DX-601					
DX-601	DX-432 14	HS-1072	M5036K291	M10036K989	QD125 93
DX-602	DX-601 13	HS-11 74	M5036K5 91		R24 93
DX-625					I .
DX-708					
DX-709	DX-625 13	HS-12 74	M5036K1090	M10048 91, 92	R4893
DX-709			M5036K12 90	M10048K 89	R60 93
DX-802					I .
DX-806					
DX-806	DX-801 13	HS-15 76	M5048K89	M10048K591	RB755093
DX-806	DX-802 13	HS-16 76	M5048K2 91	M10048K9 89	BG50 94
DX-808					
DX-810					
DX-812		HS-18-LF77	M5048K989	M10048K1290	RL50 94
DX-812	DX-810 13	HS-19 81	M5048K1090	M10060 91 92	RI 75
DX-814					I .
DX-816					I .
DX818		HS-21/8	M5060 91, 92	M10060K291	RS162096
DX818	DX-816 13	HS-2272	M5060K89	M10060K591	RS162596
DX-901					
DX-906	DX-010 13				
DX-906		HS-26-LF73	M5060K591		
DX-906	DX-902 13	HS-30L78	M5060K989	M10060K1290	RS252096
DX-908					
DX-910				· ·	
DX-912					
DX-912	DX-910 13	HS-32 80	M5072 91, 92	M10072K291	S25-126103
DX-914 13 HS-34 82 M5072K2 91 M10072K9 89 S25-140 103 DX-916 13 HS-35 82 M5072K5 91 M10072K10 90 S1020 96 DX-918 13 HS-36 82 M5072K9 89 M10072K12 90 S1616 96 E50 93 HS-37 80 M5072K10 90 M12524 91,92 S1620 96 E75 93 HS-40 76 M5072K12 90 M12524K 89 S1625 96 E100 93 HS-41 76 M7524K 89 M12524K2 91 S2020 96 FG-L2 84 HS-42 76 M7524K2 91 M12524K9 89 S2025 96 FG-LR2 84 HS-50 82 M7524K9 89 M12524K10 90 S2520 96 FG-LR2 84 HS-51 82 M7524K9	DX-912 13	HS-33 75	M5072K 89	M10072K5 91	
DX-916 .13 HS-35 .82 M5072K5 .91 M10072K10 .90 S1020 .96 DX-918 .13 HS-36 .82 M5072K9 .89 M10072K12 .90 S1616 .96 E50 .93 HS-37 .80 M5072K12 .90 M12524 .91 .92 .96 E70 .93 HS-39 .76 M5072K12 .90 M12524K .89 .91625 .96 E100 .93 HS-40 .76 M7524 .91 .92 .2016 .96 E125 .93 HS-41 .76 M7524K .89 M12524K5 .91 .2020 .96 FG-L2 .84 HS-42 .76 M7524K2 .91 M12524K5 .91 .2020 .96 FG-LR2 .84 HS-50 .82 M7524K9 .89 M12524K10 .90 .2520 .96 FG-R2 .84 HS-53 .82 M7524K9					
DX-918 13 HS-36 82 M5072K9 89 M10072K12 90 S1616 96 E50 93 HS-37 80 M5072K10 90 M12524 91,92 S1620 96 E75 93 HS-40 76 M5072K12 90 M12524K2 91 S2016 96 E100 93 HS-40 76 M7524 91,92 M12524K2 91 S2016 96 E125 93 HS-41 76 M7524K2 91 M12524K5 91 S2020 96 FG-L2 84 HS-42 76 M7524K2 91 M12524K9 89 S2025 96 FG-L2 84 HS-50 82 M7524K5 91 M12524K9 89 S2025 96 FG-L2 84 HS-50 82 M7524K19 89 M12524K9 89 S2025 96 FG-L2 84 HS-50 82 M7524K19 <t< td=""><td></td><td></td><td></td><td></td><td></td></t<>					
DX-918 13 HS-36 82 M5072K9 89 M10072K12 90 S1616 96 E50 93 HS-37 80 M5072K10 90 M12524 91,92 S1620 96 E75 93 HS-40 76 M5072K12 90 M12524K2 91 S2016 96 E100 93 HS-40 76 M7524 91,92 M12524K2 91 S2016 96 E125 93 HS-41 76 M7524K2 91 M12524K5 91 S2020 96 FG-L2 84 HS-42 76 M7524K2 91 M12524K9 89 S2025 96 FG-L2 84 HS-50 82 M7524K5 91 M12524K9 89 S2025 96 FG-L2 84 HS-50 82 M7524K19 89 M12524K9 89 S2025 96 FG-L2 84 HS-50 82 M7524K19 <t< td=""><td>DX-916 13</td><td>HS-35 82</td><td>M5072K591</td><td>M10072K1090</td><td>S1020 96</td></t<>	DX-916 13	HS-35 82	M5072K591	M10072K1090	S1020 96
E50 93 HS-37 80 M5072K10 90 M12524 91, 92 S1620 96 E75 93 HS-39 76 M5072K12 90 M12524K 89 S1625 96 E100 93 HS-40 76 M7524 91, 92 M12524K2 91 S2016 96 E125 93 HS-41 76 M7524K 89 M12524K5 91 S2020 96 FG-L2 84 HS-42 76 M7524K2 91 M12524K5 91 S2020 96 FG-LR2 84 HS-43 72 M7524K5 91 M12524K10 90 S2520 96 FG-R2 84 HS-50 82 M7524K9 89 M12524K10 90 S2520 96 FG-R2 84 HS-51 82 M7524K10 90 M12536 91 S5036 94 G50 93 HS-51 82 M7524K10 90 M12536K 89 S7536 94 G75 93 HS-53 82 M7524K10 90 M12536K 89 S7536 94 G100 93 HS-56 75 M7536 91, 92 M12536K2 91 S7548 94 G125 93 HS-58 75 M7536K 89 M12536K2 91 S7548 94 G1620 96 HS-62 81 M7536K2 91 M12536K1 90 SG-L2 84 G1625 96 HS-64 79 M7536K9 89 M12536K1 90 SG-R2 84 G1625 96 HS-64 79 M7536K9 89 M12536K1 90 SG-R2 84 G1625 96 HS-65 79 M7536K1 90 M12536K1 90 SG-R2 84 G1625 96 HS-64 79 M7536K9 89 M12536K1 90 SG-R2 84 G1625 96 HS-65 79 M7536K9 89 M12536K1 90 SG-R2 84 G1625 96 HS-66 74 M7536K2 91 M12536K1 90 SG-R2 84 G1625 96 HS-66 79 M7536K1 90 M12536K1 90 SG-R2 84 G1625 96 HS-66 79 M7536K1 90 M12536K1 90 SG-R2 84 G1625 96 HS-66 79 M7536K1 90 M12536K1 90 SW50 93 G2016 96 HS-66 74 M7536K2 91 M12536K1 90 SW50 93 G2020 96 HS-66 74 M7536K2 91 M12536K1 90 SW50 93 G2050 96 HS-68 74 M7548K 91 90 M12548K 89 SW100 93 G2520 96 HS-68 74 M7548K 91 90 M12548K5 91 SW125 93 G2520 96 HS-68 74 M7548K 91 90 M12548K5 91 WB-1712 84 H-100 84 HS-70 74 M7548K 91 90 M12548K9 89 WB-1715 84 H-101 57, 83 HS-70 74 M7548K9 89 M12548K1 90 WS-1 106 H-105 83 HS-1016 85 M7548K1 90 M12560K 89	DX-918	HS-36 82	M5072K9 89		S1616 96
E75 93 HS-39 76 M5072K12 90 M12524K 89 S1625 96 E100 93 HS-40 76 M7524 91, 92 M12524K2 91 S2016 96 E125 93 HS-41 76 M7524K 89 M12524K9 89 S2020 96 FG-L2 84 HS-42 76 M7524K5 91 M12524K9 89 S2025 96 FG-LR2 84 HS-50 82 M7524K5 91 M12524K10 90 S2520 96 FG-R2 84 HS-50 82 M7524K10 90 M12536K 90 S5036 94 G50 93 HS-51 82 M7524K10 90 M12536K 89 S7536 94 G75 93 HS-53 82 M7524K10 90 M12536K 89 S7536 94 G100 93 HS-65 75 M7536K 89					
E100 93 HS-40 76 M7524K 91,92 M12524K2 91 S2016 96 E125 93 HS-41 76 M7524K 89 M12524K5 91 S2020 96 FG-L2 84 HS-42 76 M7524K2 91 M12524K9 89 S2025 96 FG-L8 84 HS-43 72 M7524K5 91 M12524K10 90 S2520 96 FG-R2 84 HS-50 82 M7524K9 89 M12524K10 90 S5036 94 G50 93 HS-51 82 M7524K10 90 M12536 91,92 S5048 94 G75 93 HS-53 82 M7524K12 90 M12536K 89 S7536 94 G100 93 HS-56 75 M7536 91,92 M12536K2 91 S7548 94 G100 93 HS-56 75 M7536K 91,92 M12536K5 91 S7548 94 G166 96 HS-61 81 M7536K2 91 M12536K5 91 SG-L2 84 G1620 96 HS-62 81 M7536K2 91 M12536K10 90 SG-R2 84 G1625 96 HS-64 79 M7536K9 89 M12536K10 90 SG-R2 84 G1625 96 HS-65 79 M7536K9 89 M12536K10 90 SG-R2 84 G1625 96 HS-65 79 M7536K9 89 M12536K10 90 SW50 93 G2016 96 HS-65 79 M7536K10 90 M12548 89 SW75 93 G2020 96 HS-66 74 M7536K10 90 M12548K 89 SW100 93 G2025 96 HS-68 74 M7548K 89 M12548K2 91 WB-1715 84 H-100 84 HS-70 74 M7548K 89 M12548K5 91 WB-1715 84 H-101 57, 83 HS-74 87 M7548K9 91 M12548K10 90 WS-1 106 H-108-1 84 HS-1025 85 M7548K12 90 M12560K 91,92 H-108-2 84 HS-1025 85 M7548K12 90 M12560K 91,92 H-108-2 84 HS-1025 85 M7548K12 90 M12560K 99,92 H-108-2 84 HS-1025 85 M7548K12 90 M12560K 89					
E100 93 HS-40 76 M7524K 91,92 M12524K2 91 S2016 96 E125 93 HS-41 76 M7524K 89 M12524K5 91 S2020 96 FG-L2 84 HS-42 76 M7524K2 91 M12524K9 89 S2025 96 FG-L8 84 HS-43 72 M7524K5 91 M12524K10 90 S2520 96 FG-R2 84 HS-50 82 M7524K9 89 M12524K10 90 S5036 94 G50 93 HS-51 82 M7524K10 90 M12536 91,92 S5048 94 G75 93 HS-53 82 M7524K12 90 M12536K 89 S7536 94 G100 93 HS-56 75 M7536 91,92 M12536K2 91 S7548 94 G100 93 HS-56 75 M7536K 91,92 M12536K5 91 S7548 94 G166 96 HS-61 81 M7536K2 91 M12536K5 91 SG-L2 84 G1620 96 HS-62 81 M7536K2 91 M12536K10 90 SG-R2 84 G1625 96 HS-64 79 M7536K9 89 M12536K10 90 SG-R2 84 G1625 96 HS-65 79 M7536K9 89 M12536K10 90 SG-R2 84 G1625 96 HS-65 79 M7536K9 89 M12536K10 90 SW50 93 G2016 96 HS-65 79 M7536K10 90 M12548 89 SW75 93 G2020 96 HS-66 74 M7536K10 90 M12548K 89 SW100 93 G2025 96 HS-68 74 M7548K 89 M12548K2 91 WB-1715 84 H-100 84 HS-70 74 M7548K 89 M12548K5 91 WB-1715 84 H-101 57, 83 HS-74 87 M7548K9 91 M12548K10 90 WS-1 106 H-108-1 84 HS-1025 85 M7548K12 90 M12560K 91,92 H-108-2 84 HS-1025 85 M7548K12 90 M12560K 91,92 H-108-2 84 HS-1025 85 M7548K12 90 M12560K 99,92 H-108-2 84 HS-1025 85 M7548K12 90 M12560K 89	E/593	HS-3976		M12524K 89	S162596
E125 93 HS-41 76 M7524K 89 M12524K5 91 S2020 96 FG-L2 84 HS-42 76 M7524K2 91 M12524K9 89 S2025 96 FG-LR2 84 HS-43 72 M7524K5 91 M12524K10 90 S2520 96 FG-R2 84 HS-50 82 M7524K10 90 M12524K12 90 S5036 94 G50 93 HS-51 82 M7524K10 90 M12536 91, 92 S5048 94 G75 93 HS-53 82 M7524K12 90 M12536K 89 S7536 94 G100 93 HS-56 75 M7536 91, 92 M12536K2 91 S7548 94 G125 93 HS-58 75 M7536K 89 M12536K5 91 SG-L2 84 G1625 96 HS-61 81 M7536K2	E10093		M7524 91. 92	M12524K291	S201696
FG-L2 84 HS-42 76 M7524K2 91 M12524K9 89 S2025 96 FG-LR2 84 HS-43 72 M7524K5 91 M12524K10 90 S2520 96 FG-R2 84 HS-50 82 M7524K9 89 M12524K12 90 S5036 94 G50 93 HS-51 82 M7524K12 90 M12536 91 92 S5048 94 G75 93 HS-53 82 M7524K12 90 M12536K 89 97536 94 G100 93 HS-56 75 M7536 91 92 M12536K2 91 S7548 94 G100 93 HS-58 75 M7536K 89 M12536K2 91 S7548 94 G125 93 HS-61 81 M7536K2 91 M12536K9 89 SG-L2 84 G1625 96 HS-62 81					
FG-LR2 84 HS-43 72 M7524K5 91 M12524K10 90 S2520 96 FG-R2 84 HS-50 82 M7524K9 89 M12524K12 90 S5036 94 G50 93 HS-51 82 M7524K10 90 M12536 91,92 S5048 94 G75 93 HS-53 82 M7524K12 90 M12536K 89 S7536 94 G100 93 HS-56 75 M7536 91,92 M12536K2 91 S7548 94 G125 93 HS-58 75 M7536K 89 M12536K5 91 SG-L2 84 G161 81 M7536K2 91 M12536K9 89 SG-LR2 84 G1620 96 HS-62 81 M7536K5 91 M12536K10 90 SG-R2 84 G1625 96 HS-65 79 M7536K9 89 M12536K12					
FG-R2 84 HS-50 82 M7524K9 89 M12524K12 90 S5036 94 G50 93 HS-51 82 M7524K10 90 M12536 91, 92 S5048 94 G75 93 HS-53 82 M7524K12 90 M12536K 89 S7536 94 G100 93 HS-56 75 M7536 91, 92 M12536K2 91 S7548 94 G125 93 HS-58 75 M7536K 89 M12536K5 91 SG-L2 84 G1616 96 HS-61 81 M7536K2 91 M12536K10 99 SG-LR2 84 G1620 96 HS-62 81 M7536K5 91 M12536K10 90 SG-R2 84 G1625 96 HS-64 79 M7536K9 89 M12536K12 90 SW50 93 G2020 96 HS-67 74 M7536K12 <					I .
FG-R2 84 HS-50 82 M7524K9 89 M12524K12 90 S5036 94 G50 93 HS-51 82 M7524K10 90 M12536 91, 92 S5048 94 G75 93 HS-53 82 M7524K12 90 M12536K 89 S7536 94 G100 93 HS-56 75 M7536 91, 92 M12536K2 91 S7548 94 G125 93 HS-58 75 M7536K 89 M12536K5 91 SG-L2 84 G1616 96 HS-61 81 M7536K2 91 M12536K10 99 SG-LR2 84 G1620 96 HS-62 81 M7536K5 91 M12536K10 90 SG-R2 84 G1625 96 HS-64 79 M7536K9 89 M12536K12 90 SW50 93 G2020 96 HS-67 74 M7536K12 <	FG-LR284	HS-43 72	M7524K591		S2520 96
G50 93 HS-51 82 M7524K10 90 M12536 91, 92 S5048 94 G75 93 HS-53 82 M7524K12 90 M12536K 89 S7536 94 G100 93 HS-56 75 M7536 91, 92 M12536K2 91 S7548 94 G125 93 HS-58 75 M7536K 89 M12536K5 91 SG-L2 84 G1616 96 HS-61 81 M7536K2 91 M12536K9 89 SG-L2 84 G1620 96 HS-62 81 M7536K5 91 M12536K10 90 SG-R2 84 G1625 96 HS-64 79 M7536K9 89 M12536K12 90 SW50 93 G2016 96 HS-67 74 M7536K12 90 M12548 91,92 SW75 93 G2020 96 HS-68 74 M7548K 9					S503694
G75 93 HS-53 82 M7524K12 90 M12536K 89 S7536 94 G100 93 HS-56 75 M7536 91, 92 M12536K2 91 S7548 94 G125 93 HS-58 75 M7536K 89 M12536K5 91 SG-L2 84 G1616 96 HS-61 81 M7536K2 91 M12536K9 89 SG-LR2 84 G1620 96 HS-62 81 M7536K5 91 M12536K10 90 SG-R2 84 G1625 96 HS-64 79 M7536K9 89 M12536K12 90 SW50 93 G2016 96 HS-65 79 M7536K10 90 M12548 91, 92 SW75 93 G2020 96 HS-67 74 M7536K12 90 M12548K 89 SW100 93 G2520 96 HS-69 74 M7548K					
G100 93 HS-56 75 M7536 91, 92 M12536K2 91 S7548 94 G125 93 HS-58 75 M7536K 89 M12536K5 91 SG-L2 84 G1616 96 HS-61 81 M7536K2 91 M12536K9 89 SG-LR2 84 G1620 96 HS-62 81 M7536K5 91 M12536K10 90 SG-R2 84 G1625 96 HS-64 79 M7536K9 89 M12536K12 90 SW50 93 G2016 96 HS-65 79 M7536K10 90 M12548 91, 92 SW75 93 G2020 96 HS-67 74 M7536K12 90 M12548K 89 SW100 93 G2520 96 HS-68 74 M7548K 89 M12548K2 91 WB-1712 84 H-100 84 HS-70 74 M7548K5					I .
G125. 93 HS-58. 75 M7536K 89 M12536K5 91 SG-L2 84 G1616. 96 HS-61. 81 M7536K2 91 M12536K9 89 SG-LR2 84 G1620. 96 HS-62. 81 M7536K5 91 M12536K10 90 SG-R2 84 G1625. 96 HS-64. 79 M7536K9 89 M12536K12 90 SW50 93 G2016. 96 HS-65. 79 M7536K10 90 M12548 91, 92 SW75 93 G2020. 96 HS-67 74 M7536K12 90 M12548K 89 SW100 93 G2025. 96 HS-68 74 M7548 91, 92 M12548K2 91 SW125 93 G2520. 96 HS-69 74 M7548K 89 M12548K5 91 WB-1712 84 H-100. 84 HS-70 74 M7548K	G7593	HS-53 82	M7524K1290	M12536K 89	S7536 94
G125. 93 HS-58. 75 M7536K 89 M12536K5 91 SG-L2 84 G1616. 96 HS-61. 81 M7536K2 91 M12536K9 89 SG-LR2 84 G1620. 96 HS-62. 81 M7536K5 91 M12536K10 90 SG-R2 84 G1625. 96 HS-64. 79 M7536K9 89 M12536K12 90 SW50 93 G2016. 96 HS-65. 79 M7536K10 90 M12548 91, 92 SW75 93 G2020. 96 HS-67 74 M7536K12 90 M12548K 89 SW100 93 G2025. 96 HS-68 74 M7548 91, 92 M12548K2 91 SW125 93 G2520. 96 HS-69 74 M7548K 89 M12548K5 91 WB-1712 84 H-100. 84 HS-70 74 M7548K	G10093	HS-5675	M753691. 92	M12536K291	S754894
G1616 96 HS-61 81 M7536K2 91 M12536K9 89 SG-LR2 84 G1620 96 HS-62 81 M7536K5 91 M12536K10 90 SG-R2 84 G1625 96 HS-64 79 M7536K9 89 M12536K12 90 SW50 93 G2016 96 HS-65 79 M7536K10 90 M12548 91, 92 SW75 93 G2020 96 HS-67 74 M7536K12 90 M12548K 89 SW100 93 G2025 96 HS-68 74 M7548 91, 92 M12548K2 91 SW125 93 G2520 96 HS-69 74 M7548K 89 M12548K5 91 WB-1712 84 H-100 84 HS-70 74 M7548K2 91 M12548K9 89 WB-1715 84 H-101 57, 83 HS-74 87 M7548K5					
G1620 96 HS-62 81 M7536K5 91 M12536K10 90 SG-R2 84 G1625 96 HS-64 79 M7536K9 89 M12536K12 90 SW50 93 G2016 96 HS-65 79 M7536K10 90 M12548 91, 92 SW75 93 G2020 96 HS-67 74 M7536K12 90 M12548K 89 SW100 93 G2025 96 HS-68 74 M7548 91, 92 M12548K2 91 SW125 93 G2520 96 HS-69 74 M7548K 89 M12548K5 91 WB-1712 84 H-100 84 HS-70 74 M7548K2 91 M12548K9 89 WB-1715 84 H-101 57, 83 HS-74 87 M7548K5 91 M12548K10 90 WS-1 106 H-108-1 83 HS-1016 85 M7548K9<					I .
G1625 96 HS-64 79 M7536K9 89 M12536K12 90 SW50 93 G2016 96 HS-65 79 M7536K10 90 M12548 91, 92 SW75 93 G2020 96 HS-67 74 M7536K12 90 M12548K 89 SW100 93 G2025 96 HS-68 74 M7548 91, 92 M12548K2 91 SW125 93 G2520 96 HS-69 74 M7548K 89 M12548K5 91 WB-1712 84 H-100 84 HS-70 74 M7548K2 91 M12548K9 89 WB-1715 84 H-101 57, 83 HS-74 87 M7548K5 91 M12548K10 90 WS-1 106 H-105 83 HS-1016 85 M7548K9 89 M12548K12 90 WS-2 106 H-108-2 84 HS-1220 85 M7548K12 90 M12560K 89		HS-61 81			
G1625 96 HS-64 79 M7536K9 89 M12536K12 90 SW50 93 G2016 96 HS-65 79 M7536K10 90 M12548 91, 92 SW75 93 G2020 96 HS-67 74 M7536K12 90 M12548K 89 SW100 93 G2025 96 HS-68 74 M7548 91, 92 M12548K2 91 SW125 93 G2520 96 HS-69 74 M7548K 89 M12548K5 91 WB-1712 84 H-100 84 HS-70 74 M7548K2 91 M12548K9 89 WB-1715 84 H-101 57, 83 HS-74 87 M7548K5 91 M12548K10 90 WS-1 106 H-105 83 HS-1016 85 M7548K9 89 M12548K12 90 WS-2 106 H-108-2 84 HS-1220 85 M7548K12 90 M12560K 89	G162096	HS-62 81	M7536K5 91	M12536K1090	SG-R284
G2016 96 HS-65 79 M7536K10 90 M12548 91, 92 SW75 93 G2020 96 HS-67 74 M7536K12 90 M12548K 89 SW100 93 G2025 96 HS-68 74 M7548 91, 92 M12548K2 91 SW125 93 G2520 96 HS-69 74 M7548K 89 M12548K5 91 WB-1712 84 H-100 84 HS-70 74 M7548K2 91 M12548K9 89 WB-1715 84 H-101 57, 83 HS-74 87 M7548K5 91 M12548K10 90 WS-1 106 H-105 83 HS-1016 85 M7548K9 89 M12548K12 90 WS-2 106 H-108-1 84 HS-1025 85 M7548K10 90 M12560K 89 H-108-2 84 HS-1220 85 M7548K12 90 M12560K 89					
G2020 96 HS-67 74 M7536K12 90 M12548K 89 SW100 93 G2025 96 HS-68 74 M7548 91, 92 M12548K2 91 SW125 93 G2520 96 HS-69 74 M7548K 89 M12548K5 91 WB-1712 84 H-100 84 HS-70 74 M7548K2 91 M12548K9 89 WB-1715 84 H-101 57, 83 HS-74 87 M7548K5 91 M12548K10 90 WS-1 106 H-105 83 HS-1016 85 M7548K9 89 M12548K12 90 WS-2 106 H-108-1 84 HS-1025 85 M7548K10 90 M12560 91, 92 M2 H-108-2 84 HS-1220 85 M7548K12 90 M12560K 89					
G2025 96 HS-68 74 M7548 91, 92 M12548K2 91 SW125 93 G2520 96 HS-69 74 M7548K 89 M12548K5 91 WB-1712 84 H-100 84 HS-70 74 M7548K2 91 M12548K9 89 WB-1715 84 H-101 57, 83 HS-74 87 M7548K5 91 M12548K10 90 WS-1 106 H-105 83 HS-1016 85 M7548K9 89 M12548K12 90 WS-2 106 H-108-1 84 HS-1025 85 M7548K10 90 M12560 91, 92 H-108-2 84 HS-1220 85 M7548K12 90 M12560K 89					
G2025 96 HS-68 74 M7548 91, 92 M12548K2 91 SW125 93 G2520 96 HS-69 74 M7548K 89 M12548K5 91 WB-1712 84 H-100 84 HS-70 74 M7548K2 91 M12548K9 89 WB-1715 84 H-101 57, 83 HS-74 87 M7548K5 91 M12548K10 90 WS-1 106 H-105 83 HS-1016 85 M7548K9 89 M12548K12 90 WS-2 106 H-108-1 84 HS-1025 85 M7548K10 90 M12560 91, 92 H-108-2 84 HS-1220 85 M7548K12 90 M12560K 89	G202096	HS-6774	M7536K1290	M12548K 89	
G2520 96 HS-69 74 M7548K 89 M12548K5 91 WB-1712 84 H-100 84 HS-70 74 M7548K2 91 M12548K9 89 WB-1715 84 H-101 57, 83 HS-74 87 M7548K5 91 M12548K10 90 WS-1 106 H-105 83 HS-1016 85 M7548K9 89 M12548K12 90 WS-2 106 H-108-1 84 HS-1025 85 M7548K10 90 M12560 91 91 M12560K 89 M12		HS-68 74			SW125. 93
H-100					
H-101					
H-101	H-10084	HS-7074	M7548K291	M12548K989	WB-1715 84
H-105	H-10157. 83	HS-7487		M12548K1090	WS-1 106
H-108-1					
H-108-2					vv3-2 100
					ĺ
	H-108-2 84	HS-1220 85	M7548K1290	M12560K89	ĺ
					ĺ

1. PRICES All previous prices are currently withdrawn.

ACCEPTANCE

If the terms and conditions herein (the "Terms and Conditions") differ in any way from the terms and conditions of Buyer's order, or if these Terms and Conditions are construed as an acceptance or confirmation acting as an acceptance, then the Seller's acceptance is EXPRESSLY CONDITIONED ON BUYER'S ACCEPTANCE OF AND AGREEMENT TO ANY TERMS AND CONDITIONS SET FORTH HEREIN, THAT ARE DIFFERENT FROM OR ADDITIONAL TO THOSE IN BUYER'S ORDER. In addition, this writing shall constitute notice of objection to any terms and conditions in Buyer's order that differ from, or are in addition to, the Terms and Conditions herein. If the Terms and Conditions herein are construed as an offer, acceptance of such offer is EXPRESSLY LIMITED TO THE TERMS AND CONDITIONS SET FORTH HEREIN. In any event, Buyer's acceptance of goods from Seller shall constitute Buyer's acceptance of and agreement to the Terms and Conditions. These Terms and Conditions shall not be supplemented or modified except as agreed to in If the terms and conditions herein (the "Terms and Conditions") differ in any way and Conditions shall not be supplemented or modified except as agreed to in writing and signed by Seller.

3. EXPRESS WARRANTIES, CONDITIONS, & EXCLUSIONS

A. Warranty

Subject to the conditions and exclusions set forth below, Seller warrants to Buyer (i) that Seller holds and will pass marketable title to the goods sold hereunder; (ii) that the goods sold hereunder will be free from defects in materials and workmanship (subject to tolerances and variances permitted by the trade hereunder) for the applicable warranty period set forth in Seller's standard warranty and limitation of liability (the "Standard Warranty"), provided, however, that the glasswasher shall have a one (1) year labor warranty and refrigeration parts shall have a one (1) year labor and parts warranty.

B. Conditions and Exclusions

The express warranty set forth above (the "Warranty") is subject to the following conditions and exclusions: (i) Buyer shall not assign its rights under the Warranty and any attempt by Buyer to assign such rights shall render the Warranty, but not any disclaimers or limitations, void, and the goods shall be sold AS IS; (ii) all goods shall be carefully installed by persons who are trained and certified professionals with respect to such installations, and be installed, used, repaired and maintained by Buyer in accordance with all applicable local laws, codes and regulations; (iii) goods covered by the Warranty shall be warranted in connection with original installation only; (iv) Seller shall not be liable by Buyer's failure to provide a continuously suitable environment, including, without limitation, neglect or misuse, failure or sudden surge of electrical power, improper air conditioning or humidity control or any other cause other than ordinary use; (v) Seller shall not be liable for any damage arising from the use of any goods in any application other than the commercial and industrial applications for which they are intended; (vi) Seller shall not be liable for damage caused by fire, flood, earthquake, water, severe wind, lightning or other natural disaster, strike, inability to obtain materials or utilities, war, terrorism, civil disturbance or any other cause beyond Seller's reasonable control; and (vi) Seller shall not be liable for any statements made about the goods by salesmen, dealers, distributors or agents, unless such statements are in a written document signed by an officer of Seller.

DISCLAIMER OF IMPLIED WARRANTIES

Seller makes no other warranties or conditions, express or implied, included, without limitation, the implied warranties or conditions of merchantability and fitness for a particular purpose. Specifically, except as provided herein and in the standard, seller undertakes no responsibility for the quality or the goods or that the goods will be fit for any particular purpose for which purchaser may be buying the goods. Any implied warranty is limited in duration to the warranty period. No oral or written information, or advice given by the company, its agents or employees, shall create a warranty or in any way increase the scope of this limited warranty.

LIMITATIONS OF LIABILITY

Buyer acknowledges that the following limitations of Seller's liability are fair and reasonable and shall apply to any act or omission hereunder, as well as to any breach of contract to which these Terms and conditions form a part.

A. Disclaimer of Damages
In no event shall seller (including its subsidiaries, affiliates, officers, directors, employees, or agents) be liable for any special, consequential, incidental or exemplary damages arising out of or in any way connected with the goods or otherwise, including, without limitation, to damages for lost profits, cost of substitute or replacement goods, down time, lost data, injury to property or any damages or sums paid by buyer to third parties, even if seller has been advised of the possibility of such damages. The foregoing limitation or liability shall apply whether any claim is based upon principles of contract, for or statutory duty, principles of indemnity or contribution, or otherwise. tort or statutory duty, principles of indemnity or contribution, or otherwise.

In no event shall seller be liable to buyer or any other party for loss, damage, or injury of any kind of nature arising out of or in connection with this warranty in excess of the purchase price of the goods actually delivered to and paid for by the buyer. The buyer's remedy in any dispute under this warranty shall be ultimately limited to the purchase price of the goods to the extent the purchase price has been paid.

B. Notice and Time of Claims

Buyer agrees (i) to check and inspect all products against shipping papers and for damage or shortage upon receipt of goods at destination; (ii) that any claim for loss, damage in transit, or other cause visible upon inspection shall be made within five (5) days of receipt; (iii) that the parties expressly waive the statute of limitations and that any legal proceeding for any cause of action arising from or relating to this contract shall be waived unless commenced within two (2) years after the accrual of such cause of action.

6. ATTORNEY'S FEES

Buyer agrees to reimburse Seller for any costs and expenses, including reasonable attorney's fees, incurred by Seller as a result of any breach or default by Buyer of its obligations hereunder.

7. TERMS

Net 30 Days for those firms furnishing satisfactory credit reference. Interest on accounts overdue more than thirty (30) days will be charged at a rate of 2% per month or the highest rate permitted by law, whichever is lower (the "Overdue

8. QUOTATIONS

Unless otherwise stated, quotations are for 90 day acceptance.

9. MINIMUM ORDER \$25.00 Net.

10. SHIPPING TERMS

The method of shipment and carrier shall be determined by Seller unless Buyer shall have specified a method of shipment and carrier (more) than ten (10) days prior to scheduled shipment. Title and all risks of loss or damage shall pass to Buyer upon delivery to carrier. We are not responsible for any delays in delivery which are beyond our control such as fires, strikes, delays in transportation or any similar contingencies. We reserve the right to ship via carriers that in our opinion are the most efficient. Where possible customer's routing will be followed. All are the most efficient. Where possible, customer's routing will be followed. All orders shipped prepaid will have a nominal administration charge per freight bill.

11. RETURNS

Custom and modified equipment, Rotary and Front Door Style Glass Washers, and Underbar Workstations without cold plates are not returnable. Return authorization for all other items must be requested within 90 days. All underbar and refrigeration equipment may only be returned with original white protective film in place. No returns are to be made to Seller without first obtaining a return authorization. No returns will be accepted or credited without such prior authorization and returns may be subject to a restocking charge of 25% of the purchase price plus transportation charges.

12. SHORTAGE

Krowne must be notified in writing within 5 days of receipt of shipment.

13. TAXES

Buyer will pay when due any and all taxes, tariffs, fees and assessments or any other similar charges imposed upon this contract, the goods covered hereby or the delivery, installation, use or resale thereof. If Buyer fails to pay any such amount when due, Seller may elect to pay it and Buyer shall promptly reimburse Seller for such payment, together with interest at the Overdue Rate.

14. GOVERNING LAW

This agreement, and all matters arising hereunder, shall be interpreted and resolved in accordance with the laws of the State of New Jersey, without giving effect to conflict of law of principles and excluding the United Nations Convention on the International Sale of Goods. Buyer and Seller submit to the personal jurisdiction of the state and federal courts of the State of New Jersey and agree that such courts will have jurisdiction over them in connection with any matter relating to or arising under this agreement. Service of process may be made by registered or certified mail, return receipt requested, to the last known address of the party being served. Process may also be served by any other legal means and Seller may bring an action with respect to any such matter in another jurisdiction.

15. PRINTS AND DRAWINGS
All prints and drawings submitted with orders will be accepted as correct sizes and any errors arising from the same will be the responsibility of the Buyer. There are no returns or cancellations for equipment built to your specifications.

16. PRODUCT IMPROVEMENT

Due to our commitment to continued product improvement, specifications are subject to change without notice.

17. MISCELLANEOUS

If any of the foregoing Terms and Conditions is declared illegal or unenforceable by a court of competent jurisdiction, it will be ineffective only to the extent of such illegality or unenforceability, without affecting the validity and enforceability, without affecting the validity and enforceability of the other Terms and Conditions. The headings used herein are inserted for convenience of reference of these Terms and Conditions. All prices are in U.S. Dollars.

California's Proposition 65 requires that consumers in the state of California receive the following notice:

▲ Warning: This product contains chemicals including lead and lead compounds known to the State of California to

*Krowne products are not manufactured or authorized by any other manufacturer. Registered Trade Name or Mark of the original manufacturer of the product which this part fits, is not owned, associated or to be confused with our company.

This Standard Warranty and Limitation of Liability (the "Warranty") sets forth the warranty provided by Krowne Metal Corporation (hereinafter "Krowne") with respect to the product purchased by Purchaser (the "Equipment). By accepting delivery of the Equipment, Purchaser agrees to be bound by and accept these terms and conditions. All defined terms within the Warranty shall have the same meaning and definition as provided elsewhere in the Warranty. Equipment covered by the Warranty shall only be warranted in connection with its original installation only. KROWNE WILL ONLY BE OBLIGATED TO HONOR THE WARRANTY SET FORTH IN THESE TERMS AND CONDITIONS UPON RECEIPT OF FULL PAYMENT FOR THE EQUIPMENT.

WARRANTY COVERAGE

- A. Subject to the conditions and exclusions set forth below, including, with respect to Diamond Series Plumbing, Purchaser's completion and delivery to Krowne of a warranty registration card or online Warranty registration, Krowne warrants to Purchaser that (i) Krowne holds and will pass marketable title to the goods sold hereunder, and (ii) the goods sold hereunder will be free from defects in materials and workmanship (subject to tolerances and variances permitted by the trade hereunder) for the applicable Warranty Period, as listed above (the "Warranty Period").
- B. Krowne's obligation under this Warranty is limited to, at Krowne's option, replacing or repairing, any Equipment or part thereof that is found by Krowne not to conform to the Equipment's specifications. Krowne shall have a reasonable period of time to make such replacements or repairs and all labor associated therewith shall be performed during Krowne's regular working hours.
- **c.** Krowne shall pay transportation charges for the return of any defective portion of the Equipment. If returned Equipment is repaired or replaced under the terms of this Warranty, Krowne will prepay transportation charges back to Purchaser; otherwise, Purchaser shall pay transportation charges to return the Equipment back to the Purchaser. All returns must be pre-approved by Krowne before shipment. Krowne shall not be obligated to pay freight for any unapproved return.
- D. Any replacement parts or Equipment will be new, comparable in function and performance to the original part of Equipment, and warranted for the remainder of the Warranty Period. Purchasing additional parts or Equipment from Krowne does not extend this Warranty Period.
- E. With regard to the Equipment, a defect shall refer to a variance from the design specifications that prohibit the Equipment from operating for its intended use. The Warranty provided by Krowne does not impose any duty or liability upon Krowne for degradation that occurs in the normal course over time, or due to improper installation of the Equipment by Purchaser or their representative.

THIS LIMITED WARRANTY IS THE ONLY WARRANTY APPLICABLE TO THE EQUIP-MENT AND REPLACES ALL OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. SPECIFICALLY, EXCEPT AS PROVIDED HEREIN, KROWNE UNDERTAKES NO RE-SPONSIBILITY FOR THE QUALITY OF THE EQUIPMENT OR THAT THE EQUIPMENT WILL BE FIT FOR ANY PARTICULAR PURPOSE FOR WHICH PURCHASER MAY BE BUYING THE EQUIPMENT. ANY IMPLIED WARRANTY IS LIMITED IN DURATION TO THE WARRANTY PERIOD. NO ORAL OR WRITTEN INFORMATION, OR ADVICE GIV-EN BY THE COMPANY, ITS AGENTS OR EMPLOYEES, SHALL CREATE A WARRANTY OR IN ANY WAY INCREASE THE SCOPE OF THIS LIMITED WARRANTY.

EXCLUSION FROM WARRANTY COVERAGE

The Warranty provided by Krowne does not impose any duty or liability upon Krowne for:

- **A.** Any damage occurring, at any time, during shipping of Equipment unless otherwise provided for in the Agreement. When returning Equipment to Krowne for repair or replacement, Purchaser assumes all risk of loss or damage, and agrees to use any shipping containers that might be provided by Krowne and to ship the Equipment in the manner prescribed by Krowne;
- B. Damage caused by the failure to provide a continuously suitable environment, but not limited to: (i) neglect or misuse, (ii) a failure or sudden surge of electrical power, (iii) improper air conditioning or humidity control, or (iv) any other cause other than ordinary use;
- C. Damage caused by the unauthorized installation, adjustment, repair or service of the Equipment by anyone other than Krowne or Krowne's expressly authorized designee;
- D. Damage caused by fire, flood, earthquake, water, severe wind, lightning or other natural disaster, strike, inability to obtain materials or utilities, war, terrorism, civil disturbance or any other cause beyond Krowne's reasonable control;
- E. Failure to adjust, repair or replace any item of Equipment if it would be impractical for Krowne personnel to do so because of connection of the Equipment by mechanical or electrical means to another device not supplied by Krowne, or the existence of general environmental conditions at the site that pose a danger to Krowne personnel;
- F. Any statements made about the product by salesmen, dealers, distributors or agents, unless such statements are in a written document signed by an officer of Krowne. Such statements as are not included in a signed writing do not constitute warranties, shall not be relied upon by Purchaser and are not part of the contract of sale;
- **G.** Any damage arising from the use of Krowne products in any application other than the commercial and industrial applications for which they are intended, unless, upon request, such use is specifically approved in writing by Krowne; or
- Any H. nerformance Ωf preventive maintenance

PURCHASER'S INSPECTION UPON RECEIPT OF EQUIPMENT

All Equipment shall be carefully inspected by Purchaser upon receipt, be installed by persons who are trained and certified professionals with respect to such installations, and be installed, used, repaired and maintained by Purchaser in accordance with all applicable local laws, codes and regulations.

LIFETIME WARRANTY PRODUCTS

The Lifetime Warranty for the Krowne Metal Corporation Gas Hose ("Gas Hose") is valid solely for the lifetime and duration of the Equipment to which the Gas Hose is connected for operation (the "Lifetime Warranty"). For the avoidance of doubt, the Lifetime Warranty shall be deemed expired on the same Warranty Period expiration date applicable to the Equipment to which the Gas Hose is

LIMITATION OF LIABILITY

In no event shall Krowne (including its subsidiaries, affiliates, officers, directors, In no event shall Krowne (including its subsidiaries, affiliates, officers, directors, employees, or agents) be liable for any special, consequential, incidental or exemplary damages arising out of or in any way connected with the Equipment or otherwise, including, without limitation, to damages for lost profits, cost of substitute or replacement Equipment, down time, lost data, injury to property or any damages or sums paid by Purchaser to third parties, even if Krowne has been advised of the possibility of such damages. The foregoing limitation of liability shall apply whether any claim is based upon principles of contract tort or statutory duty principles of indempity or contribution or otherwise. contract, tort or statutory duty, principles of indemnity or contribution, or otherwise.

In no event shall Krowne be liable to Purchaser or any other party for loss, damage, or injury of any kind or nature arising out of or in connection with this Warranty in excess of the purchase price of the Equipment actually delivered to and paid for by the Purchaser. The Purchaser's remedy in any dispute under this Warranty shall be ultimately limited to the Purchase Price of the Equipment to the extent the Purchase Price has been paid.

ASSIGNMENT OF RIGHTS

The Warranty contained herein extends only to the original Purchaser of the Equipment and no attempt to extend the Warranty to any subsequent user or transferee of the Equipment shall be valid or enforceable without the express written consent of Krowne. Any attempt by Purchaser to assign this Warranty shall render the Warranty, but not any disclaimers or limitations, void, and the goods shall be sold

COMPONENT PASS THROUGH WARRANTY

Except as provided herein, although Krowne does not warrant components, it will pass through any warranties received by third-party component suppliers, to the extent permitted by the terms and conditions of such warranties.

NOTICE AND TIME OF CLAIMS

Purchaser shall make any claim for loss or damage to Equipment sustained during shipment within five (5) days of receipt of such Equipment.

DISPUTE RESOLUTION

Any dispute between the parties will be resolved exclusively and finally by arbitration and conducted under the assigned arbitrator rules, except as otherwise provided below. The arbitration will be conducted before a single arbitrator. The arbitration shall be held in Essex County, New Jersey. Any decision rendered in such arbitration proceedings will be final and binding on each of the parties, and judgment may be entered thereon in any court of competent jurisdiction. This arbitration agreement is made pursuant to a transaction involving interstate commerce, and shall be governed by the Federal Arbitration Act.

10. GOVERNING LAW

Both parties consent to the application of the laws of the State of New Jersey to govern, interpret, and enforce all of Purchaser and Krowne's rights, duties, and obligations arising from, or relating in any manner to, the subject matter of this Warranty, without regard to conflict of law principles. In no event shall the rights and obligations of the parties under this warranty shall not be governed by the provisions of the United Nations Convention on Contracts for the International Sales of Goods of 1980.

Product Description	Warranty Period
Diamond Series Plumbing	Lifetime
Royal Series Plumbing	3 years
Silver Series Plumbing	1 year
Hand Sinks	1 year
Royal Series Underbar	1 year
Silver Series Underbar	1 year
Refrigeration*	1 year parts & labor, 5 year compressor
Glass Washers	1 year (parts & labor)
Gas Hoses	Lifetime

*Includes draft beer coolers, bottle coolers, mug frosters, back bar refrigeration





PURCHASE

✓ orders@krowne.com

CONTACT

✓ customerservice@krowne.com

✓ sales@krowne.com

800.631.0442

FOLLOW

f y in @krowne

© d @krownemetal

VISIT

100 Haul Road Wayne, NJ 07470 krowne.com



100 Haul Rd. Wayne, NJ 07470 **krowne.com**